

2NT91-50 SERIES CHART 1

DRAW I NG NUMBER

വ

A C094360 TSM 19NOV99 B 207782

C 0002302

NOTES 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE


OF 160° F CONTINOUSLY AT FULL RATED LOAD


2 - MICRO SWITCH CAT. LIST. MARKED ON SIDE OF SWITCH

3 - FURNISHED UNASSEMBLED

4 - KEYWAY SHOWN ON LEFT SIDE

5 - SUFFIX LETTER MUST BE ADDED FOR DESIRED TYPE OF TOGGLE LOCKING. SEE CHART FOR AVAILABLE LOCKING COMBINATIONS

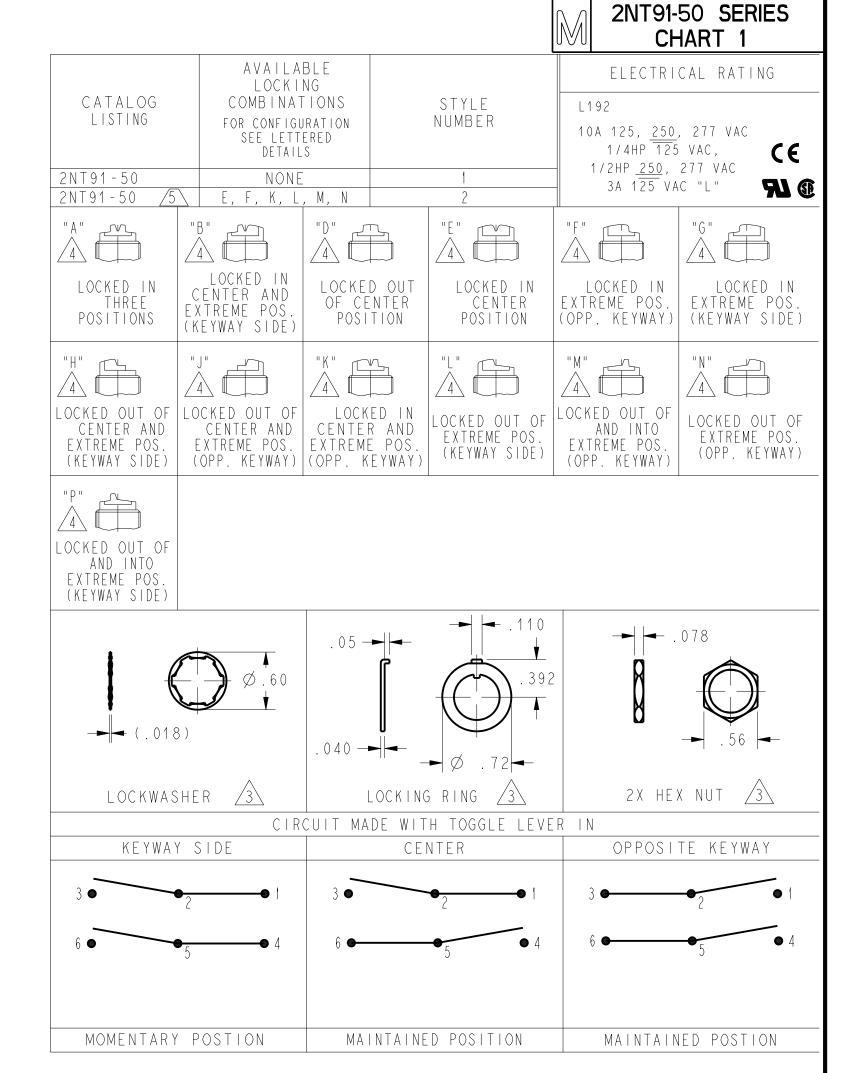

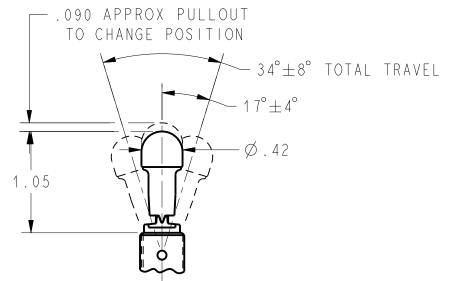

STYLE 2 LEVER

⊕ -=-DO NOT SCALE PRINT UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ONE PLACE (.0)  $\pm .030$ TWO PLACES (.00) ±.015 THREE PLACES (.000) ± .005 ANGLES

weight .15 LBS APPROX

THIRD ANGLE PROJECTION

MICRO SWITCH a Honeywell Division FED. MFG. CODE 91929

SWITCH - TOGGLE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF

HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

**2NT91-50 SERIES** CHART 1

CATALOG LISTING

ANSI Y14.5M-1982 APPLIES