



MICRO SWITCH  
a Honeywell Division  
FED. MFG. CODE 91929

SWITCH - TOGGLE

CATALOG LISTING  
2NT91 SERIES CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CATALOG LISTING	CIRCUIT MADE WITH TOGGLE LEVER IN <span>△4</span>			ELECTRICAL DATA
	KEYWAY SIDE (1-2, 4-5)	CENTER (1-2, 4-5)	OPPOSITE KEYWAY (2-3, 5-6)	
2NT91-1	ON	OFF	ON	L191 15A 125, <u>250</u> , 277 VAC 1/2HP 125 VAC 1HP <u>250</u> , 277 VAC 5A 125 VAC "L" <span>CE</span> <span>UL</span> <span>®</span>
2NT91-2	OFF	NONE	ON	
2NT91-3	ON	NONE	ON	
<span>△A</span>	NONE	OFF	ON	
<span>△A</span>	NONE	ON	ON	
<span>△A</span>	MOM OFF	NONE	ON	L192 10A 125, <u>250</u> , 277 VAC 1/4HP 125 VAC, 1/2HP <u>250</u> , 277 VAC 3A 125 VAC "L" <span>CE</span> <span>UL</span> <span>®</span>
2NT91-5	MOM ON	OFF	ON	
2NT91-6	MOM ON	NONE	OFF	
2NT91-7	MOM ON	OFF	MOM ON	
2NT91-8	MOM ON	NONE	ON	
<span>△A</span>	NONE	ON	MOM ON	
<span>△A</span>	MOM ON	OFF	NONE	

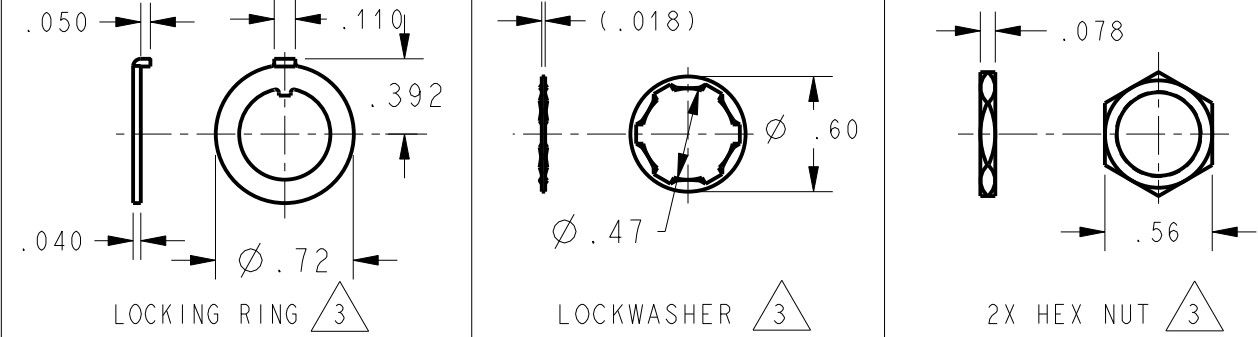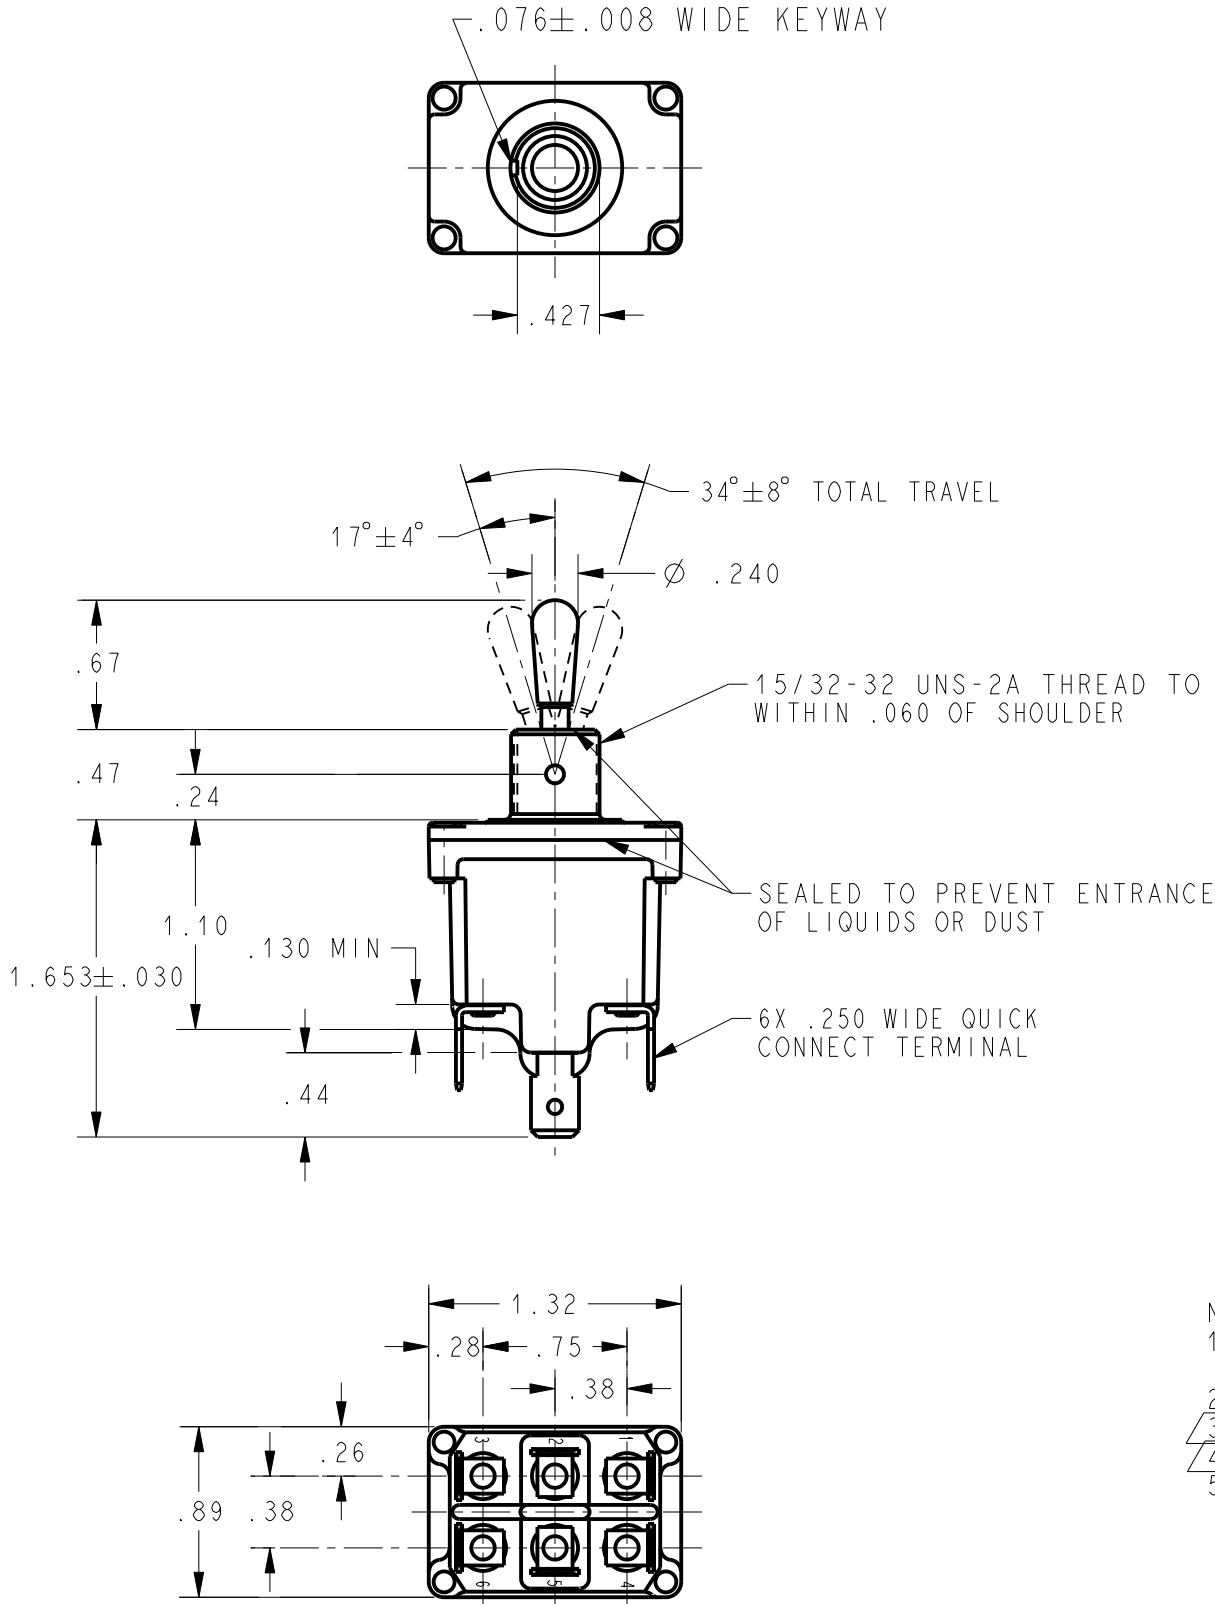

NOTES

- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- 2 - MICRO SWITCH CAT. LIST. MARKED ON SIDE OF SWITCH FURNISHED UNASSEMBLED
- △3 - APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS
- △4 - TO ORDER WITHOUT HARDWARE ADD (-NH) SUFFIX TO CATALOG LISTING
- 5 -

THIRD ANGLE PROJECTION	
SCALE	FULL
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE	(.0) ±.030
TWO PLACE	(.00) ±.015
THREE PLACE	(.000) ±.005
ANGLES	±
WEIGHT	.15 LBS APPROX