


MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929









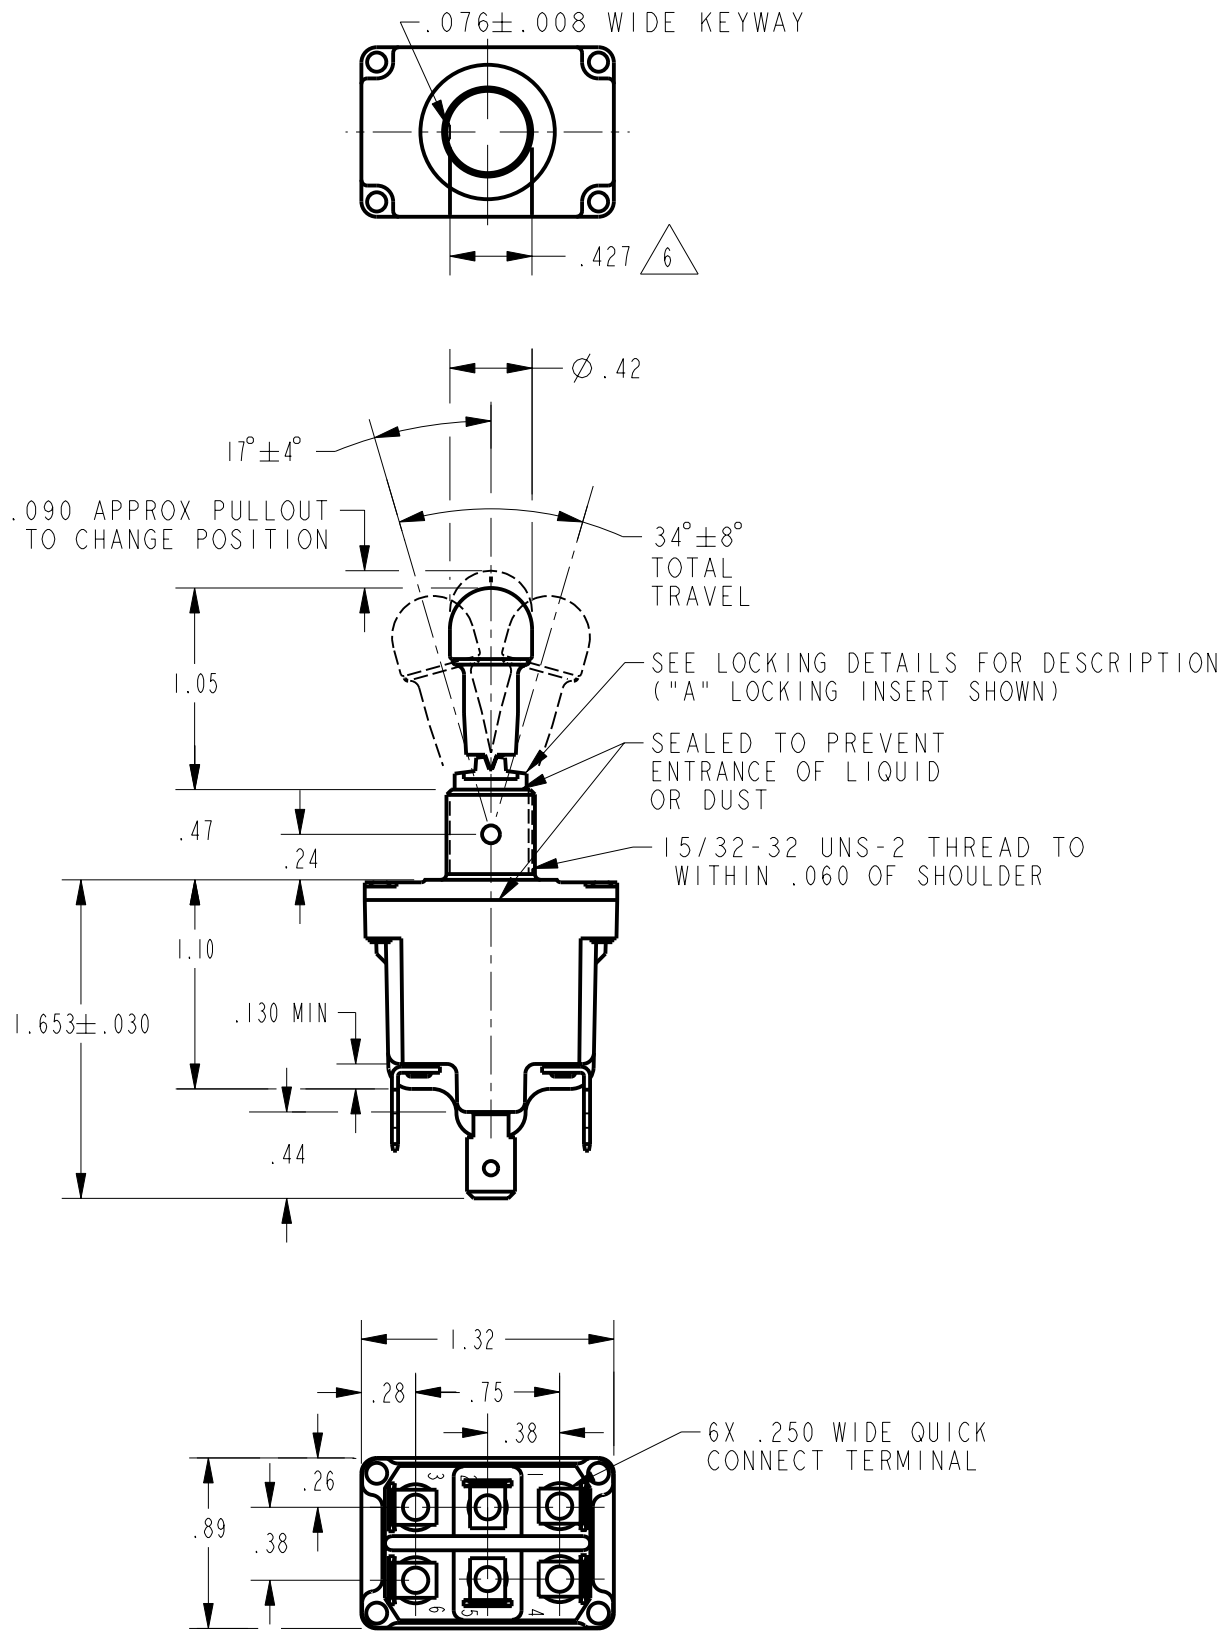






SWITCH - TOGGLE

2NT91 SERIES CHART 2


CATALOG LISTING

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH



ELECTRICAL DATA		AVAILABLE LOCKING COMBINATIONS FOR CONFIGURATION SEE LETTERED DETAILS	<div>4</div> CATALOG LISTING	CIRCUIT MADE WITH TOGGLE LEVER IN							
				KEYWAY SIDE (1-2, 4-5)	CENTER (1-2, 4-5)	OPPOSITE KEYWAY (2-3, 5-6)					
L191 15A 125, <u>250</u> , 277 VAC 1/2HP 125 VAC 1HP <u>250</u> , 277 VAC 5A 125 VAC "L"		A,B,D,E,F,G,H,J,K,L,M,N,P	2NT91-1	ON	OFF	ON					
		D,F,G	2NT91-2	OFF	NONE	ON					
		D,F,G	2NT91-3	ON	NONE	ON					
		E,F,K,M	2NT91-21	NONE	OFF	ON					
		E,F,K,M	2NT91-31	NONE	ON	ON					
L192 10A 125, <u>250</u> , 277 VAC 1/4HP 125 VAC, 1/2HP <u>250</u> , 277 VAC 3A 125 VAC "L"		F	2NT91-4	MOM OFF	NONE	ON					
		E,F,K,L,M,N	2NT91-5	MOM ON	OFF	ON					
		F	2NT91-6	MOM ON	NONE	OFF					
		E,L,N	2NT91-7	MOM ON	OFF	MOM ON					
		F	2NT91-8	MOM ON	NONE	ON					
		E	2NT91-51	NONE	ON	MOM ON					
		E	2NT91-61	MOM ON	OFF	NONE					
"A"	 LOCKED IN THREE POSITIONS	"B"	 LOCKED IN CENTER AND EXTREME POS. (KEYWAY SIDE)	"D"	 LOCKED OUT OF CENTER POSITION	"E"	 LOCKED IN CENTER POSITION	"F"	 LOCKED IN EXTREME POS. (OPP. KEYWAY)	"G"	 LOCKED IN EXTREME POS. (KEYWAY SIDE)
"H"	 LOCKED OUT OF CENTER AND EXTREME POS. (KEYWAY SIDE)	"J"	 LOCKED OUT OF CENTER AND EXTREME POS. (OPP. KEYWAY)	"K"	 LOCKED IN CENTER AND EXTREME POS. (OPP. KEYWAY)	"L"	 LOCKED OUT OF EXTREME POS. (KEYWAY SIDE)	"M"	 LOCKED OUT OF AND INTO EXTREME POS. (OPP. KEYWAY)	"N"	 LOCKED OUT OF EXTREME POS. (OPP. KEYWAY)
"P"	 LOCKED OUT OF AND INTO EXTREME POS. (KEYWAY SIDE)	NOTES 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE									

- NOTES
- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160° F CONTINUOUSLY AT FULL RATED LOAD
 - 2 - MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH FURNISHED UNASSEMBLED
 - 3 - SUFFIX LETTER MUST BE ADDED FOR DESIRED TYPE OF TOGGLE LOCKING. SEE CHART FOR AVAILABLE LOCKING COMBINATIONS
 - 4 - APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS
 - 5 - FROM BOTTOM OF KEYWAY TO MAJOR DIA OF 15/32 THREAD

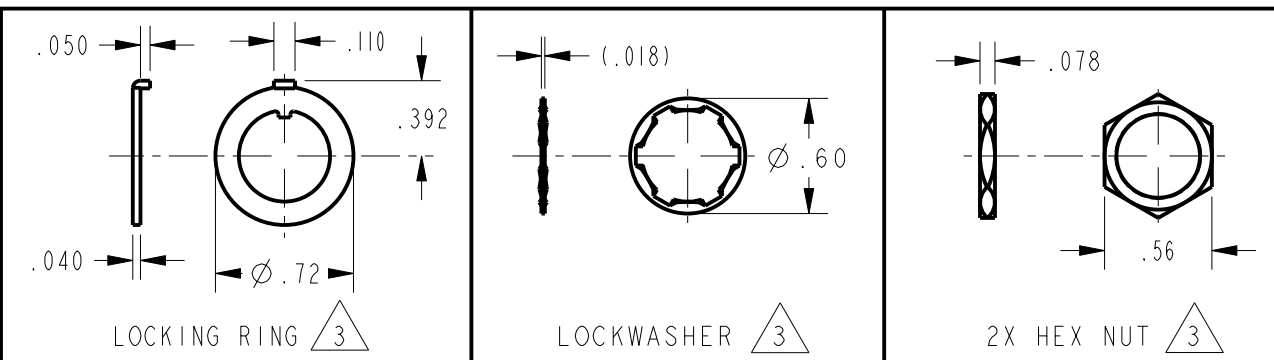

THIRD ANGLE PROJECTION	
SCALE	FULL
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE	(.0) ±.030
TWO PLACE	(.00) ±.015
THREE PLACE	(.000) ±.005
ANGLES	±
WEIGHT	.15 LBS APPROX

ANSI Y14.5M-1982 APPLIES