

HONEYWELL PART NUMBER
2SX1-T2
PRODUCT CODE VDC0155

REV	DOCUMENT	CHANGED BY	CHECK
6	0038447	SS 28MAR08	BLR

B



A

A

B


A

A

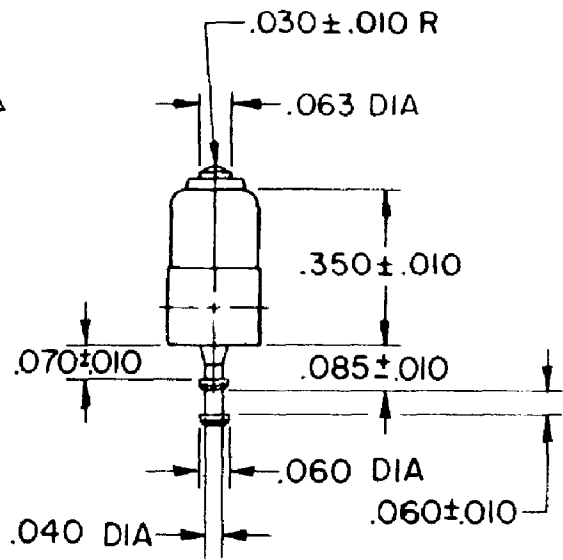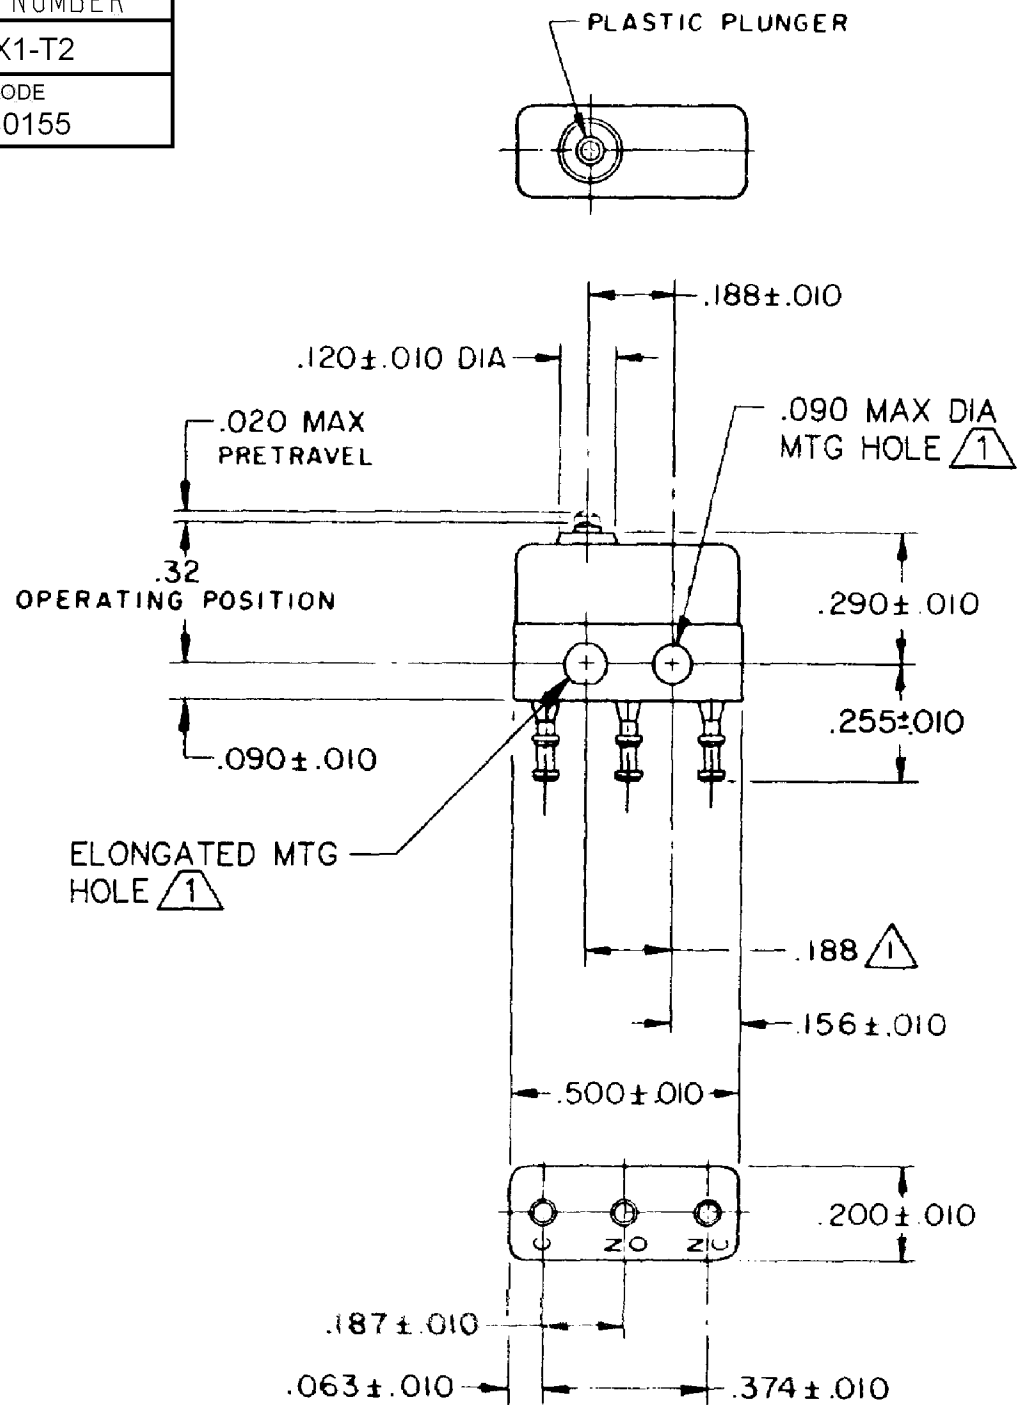

NOTE
1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188±.002 CENTERS
2 - TERMINALS ARE PLATED FOR SOLDERING
3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

RELEASE NO. PR-2423
REPLACES

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ±		DRAWN	SPK	04FEB08	Honeywell			
OPERATING FORCE — — — — 3 OZ MAX		CONTACT ARRANGEMENT SPDT					CHECK	RJ	04FEB08				
RELEASE FORCE— — — — — 1 OZ MIN		28 VOLTS DC RATING			0.030 0.015 0.005	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC				
DIFFERENTIAL TRAVEL— — — .005 MAX			SEA LEVEL	50,000 FT									
OVERTRAVEL — — — — — .004 MIN		MAXIMUM INRUSH 24 AMP				INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME		REV
		INDUCTIVE	4 AMP	2.5 AMP					B	I	2SX1-T2		6
		RESISTIVE	7 AMP	7 AMP	THIRD ANGLE PROJECTION 								
		APPROVALS											
		KEMA, CE	7A 250V~ T125 5E4 										
		UL, CSA	7A 250 VAC  BRAND L7										
								RASTER		SCALE	-	WEIGHT:.003 LB MAX	SHEET 1 OF 1