

HONEYWELL PART NUMBER
2SX27-T
PRODUCT CODE VDA2720

REV	DOCUMENT	CHANGED BY	CHECK
5	0038447	SS 28MAR08	BLR

B

A




A

B

A

A

PLASTIC PLUNGER

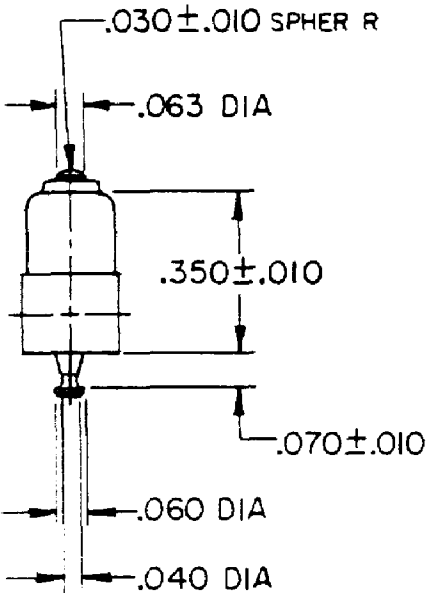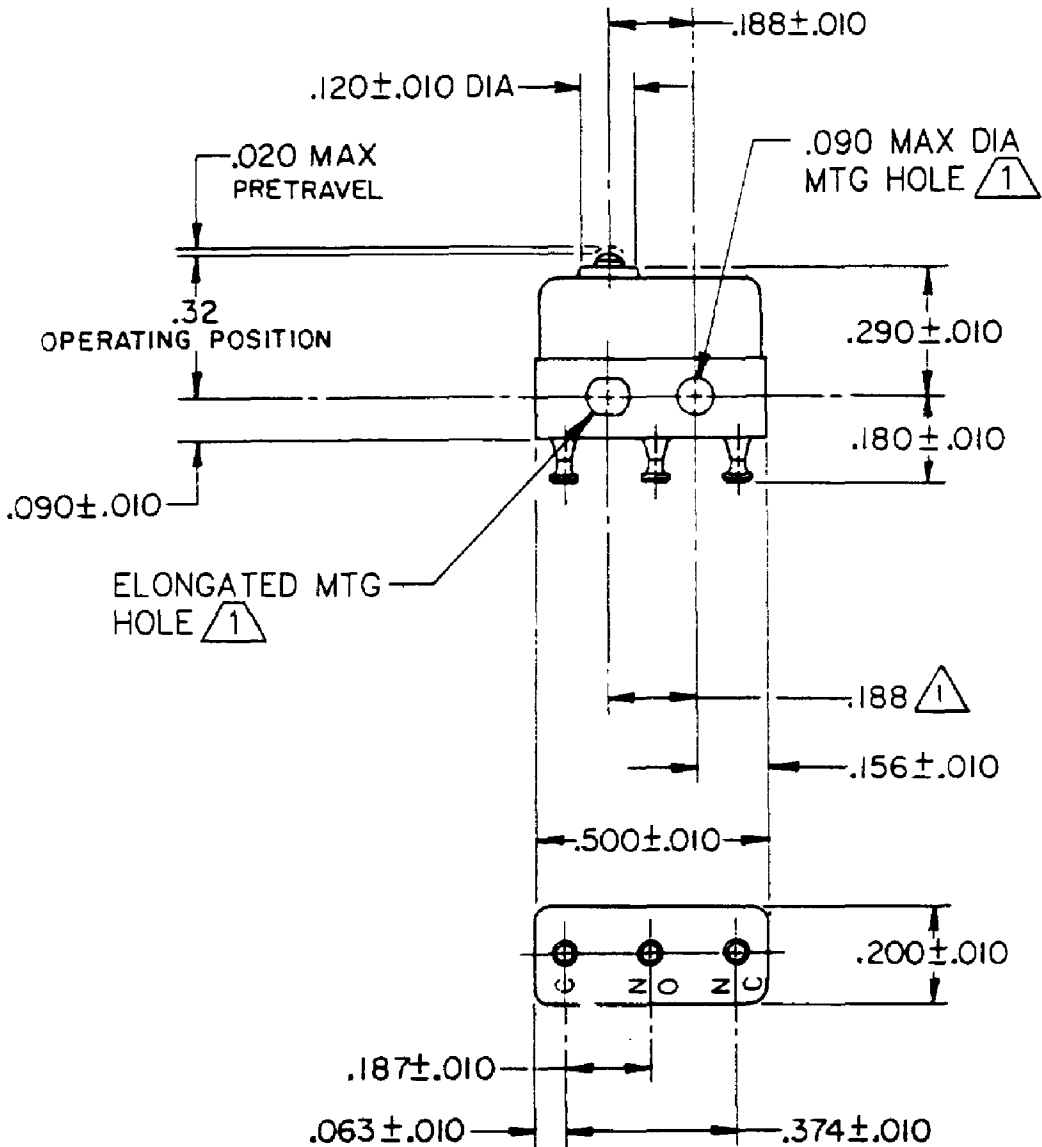

- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188±.002 CENTERS
 - 2 - TERMINALS ARE PLATED FOR SOLDERING
 - 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°F

RELEASE NO.	PR-15357
REPLACES	X84468-SX

CHARACTERISTICS	ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ± THIRD ANGLE PROJECTION 			DRAWN	SPK	04FEB08	Honeywell							
OPERATING FORCE — — — 3 OZ MAX	CONTACT ARRANGEMENT SPDT						CHECK	RJ	04FEB08					TITLE SWITCH - BASIC			
RELEASE FORCE— — — — 1 OZ MIN	28 VOLTS DC RATING						THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.										
DIFFERENTIAL TRAVEL— — — .005 MAX		SEA LEVEL	50,000 FT							INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY							
OVERTRAVEL — — — — — .004 MIN	INDUCTIVE	4 AMP	2.5 AMP	SIZE	TYPE	DRAWING NAME							REV				
	RESISTIVE	7 AMP	7 AMP	B	I	2SX27-T	5										
MAXIMUM INRUSH 24 AMP							SCALE -		WEIGHT:.003 LB MAX		SHEET 1 OF 1						
APPROVALS	KEMA, CE	7A 250V~ T125 5E4 															
	UL, CSA	7A 250 VAC   BRAND L7															