
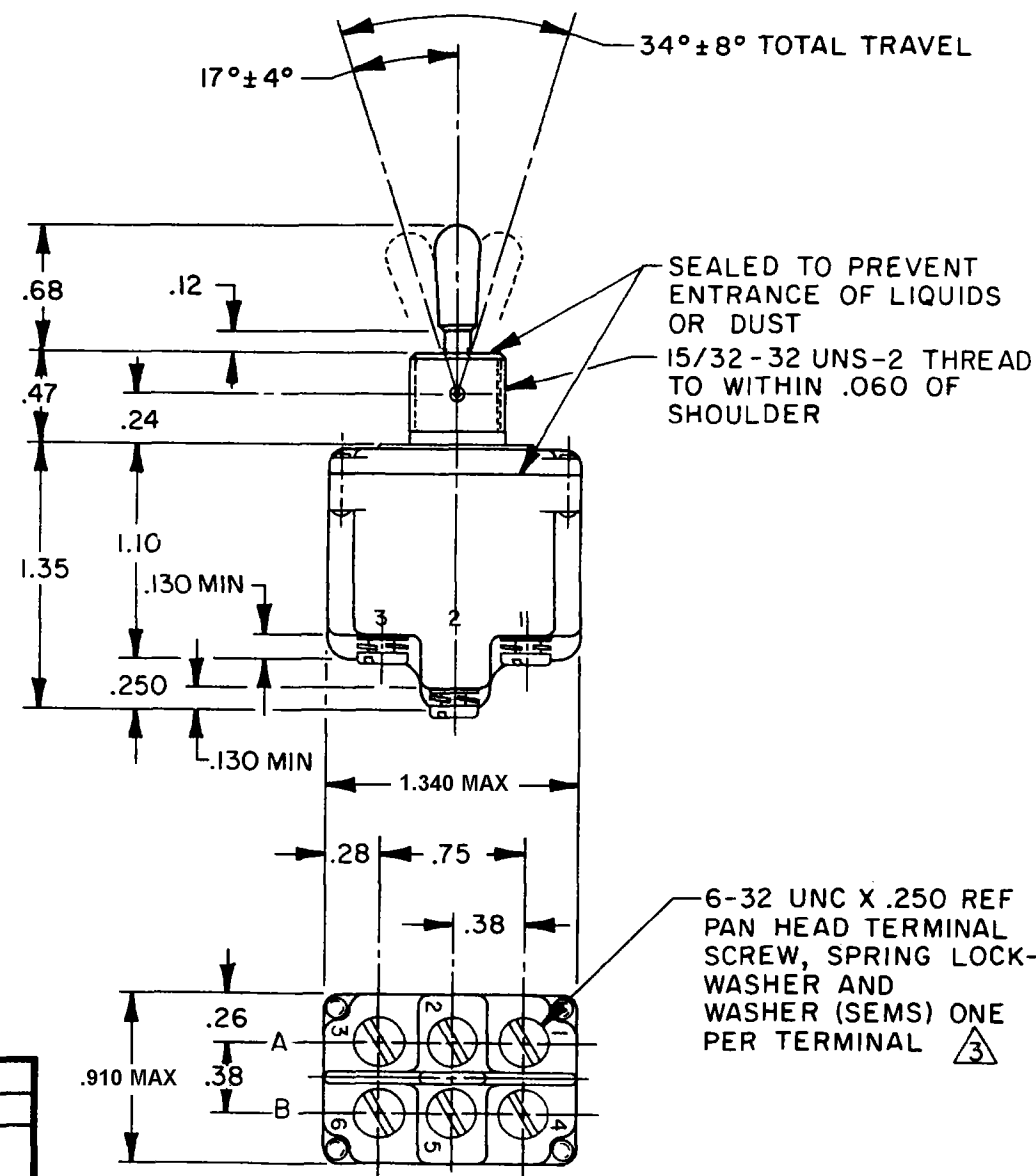


MICRO SWITCH
FREEPORT ILLINOIS U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929




SWITCH-TOGGLE

CATALOG LISTING
2TL11-200 SERIES
CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

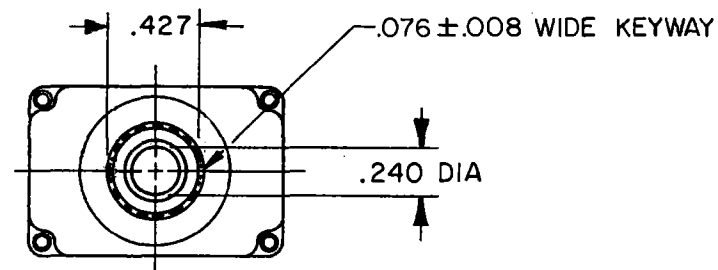

CATALOG LISTING	CIRCUIT MADE WITH TOGGLE LEVER IN			CURRENT CAPACITY (AMPS)							
	OPPOSITE KEYWAY (1-2,4-5)	CENTER (1-2,4-5)	KEYWAY SIDE (2-3,5-6)	RESISTIVE LOAD				LAMP LOAD		INDUCTIVE LOAD	
				28 DC VOLTS	125 DC VOLTS	250 DC VOLTS	125 DC VOLTS	250 DC VOLTS	28 VDC	125 VDC	28 VDC
	ON	OFF	ON								
	OFF	NONE	ON								
	ON	NONE	ON	20	.75	.5	15	6	7	4	15
	NONE	OFF	ON								
	NONE	ON	ON								
	MOM OFF	NONE	ON								
2TL11-205	MOM ON	OFF	ON								
	MOM ON	NONE	OFF								
	MOM ON	OFF	MOM ON								
	MOM ON	NONE	ON	18	.75	.5	11	6	5	2	10
	NONE	ON	MOM ON								
	MOM ON	OFF	NONE								

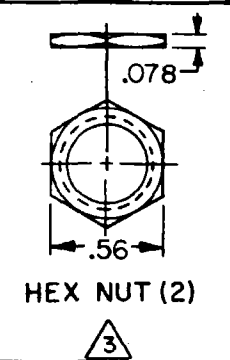

NOTES

- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- 2 - POLE, CIRCUIT DESIGNATION, AND MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
- 3 - FURNISHED UNASSEMBLED
- 4 - FOR TERMINAL COVER SEE MICRO SWITCH CAT. LIST. 5PA8
- 5 - APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS

SCALE FULL
DO NOT SCALE PRINT
UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES
WEIGHT .12 LB APPROX

M 2TL11-200 SERIES
CHART 1

DRAWING NUMBER
X 2
ISSUE
X 4

REVISIONS
A CO 59379
S. J. S.
8 SEP 86
B CO 78047
SAD
22 AUG 94
C 0003011
KRB
05 FEB 04

RELEASE NO. PR-13359
06 FEB 04
MDM
CHECK
17 SEP 84
CHECK
18 SEP 84
CHECK
14 SEP 84
CHECK
JAP
FO-52851-A
DRAWN