



MICRO SWITCH

FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-TOGGLE

CATALOG LISTING
2TL11 SERIES
CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

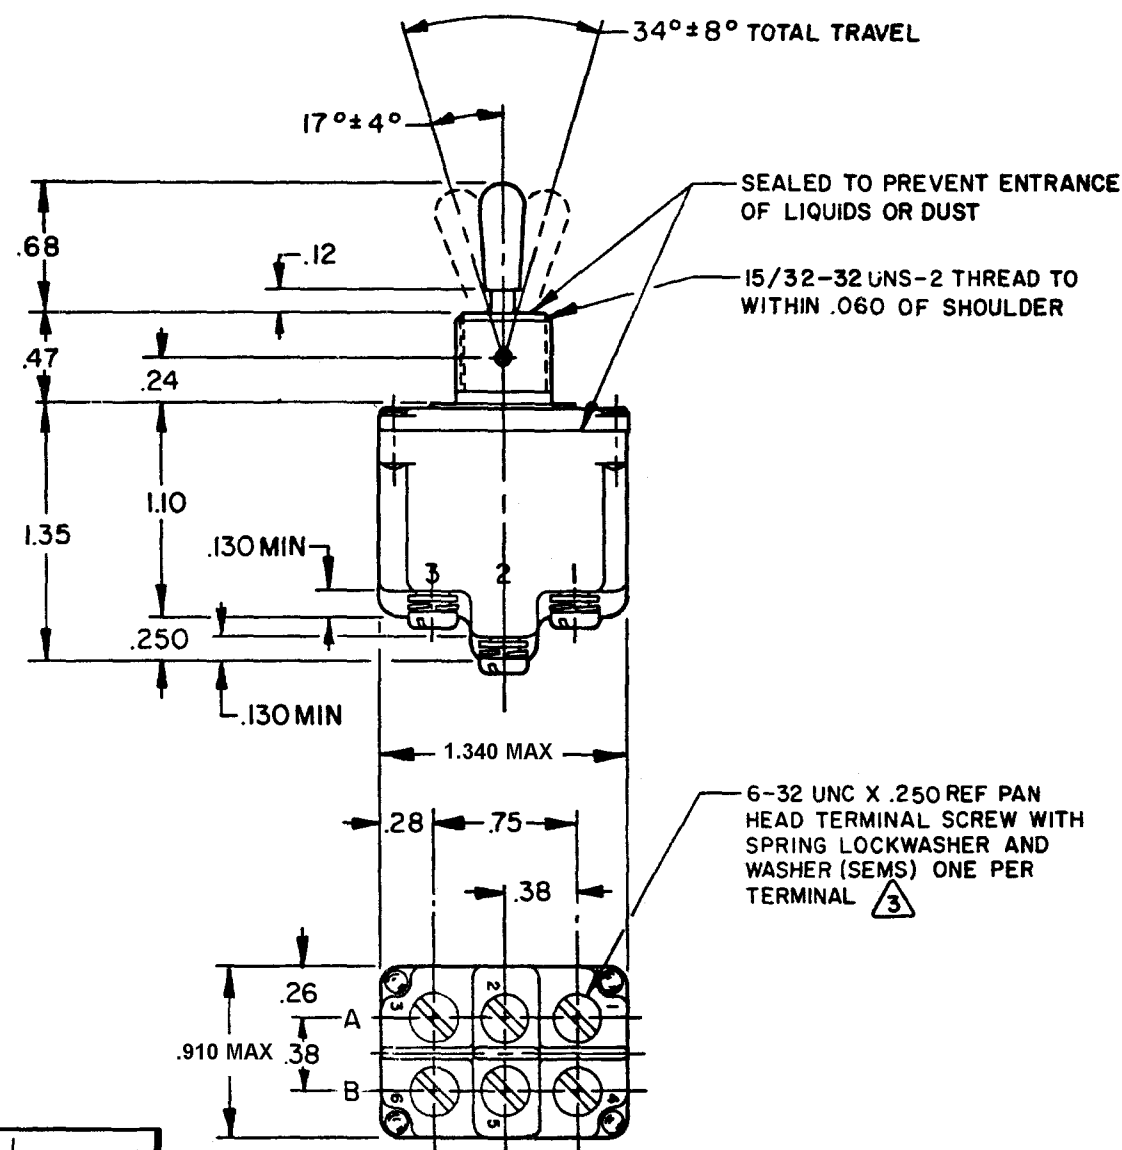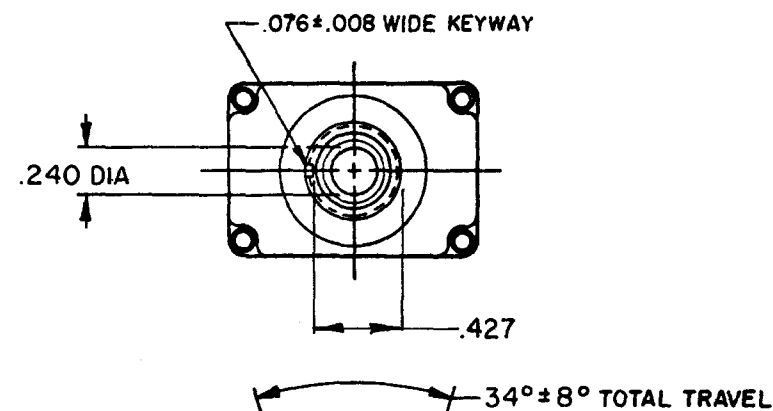




6-32 UNC X .250 REF PAN HEAD TERMINAL SCREW WITH SPRING LOCKWASHER AND WASHER (SEMS) ONE PER TERMINAL

CATALOG LISTING

CIRCUIT MADE WITH TOGGLE LEVER IN
KEYWAY SIDE (1-2,4-5)
CENTER (1-2,4-5)
OPPOSITE KEYWAY (2-3,5-6)

CURRENT CAPACITY (AMPS)

RESISTIVE LOAD			AC VOLTS		LAMP LOAD		INDUCTIVE LOAD	
DC VOLTS			125	250	28 VDC	125 VAC	28 VDC	125 VAC
20	.75	.5	15	6	7	4	15	15
18	.75	.5	11	6	5	2	10	8



NOTES

- SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- POLE, CIRCUIT DESIGNATION, AND MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
- FURNISHED UNASSEMBLED
- FOR TERMINAL COVER SEE MICRO SWITCH CATALOG LISTING 5PA8
- APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES

WEIGHT .12 LB APPROX

CATALOG LISTING
2TL11 SERIES CHART 1

ISSUE
16

REVISIONS

A CO35421
L S D
28 JUN 77
B CO49070
G R T
16 MAY 81
C CO50496
T S K
13 NOV 81
D CO59379
S J
8 SEP 86
E CO78047
S A D
22 AUG 94
F CO95307
C S L
18 NOV 99
G 203655
J L H
27 AUG 01
H 0003011
K R B
05 FEB 04

RASTER

REPLACES
PAGE 1 OF 1
06 FEB 04
CHECK MDM
7-7-77
CHECK DFK
7-7-77
CHECK GCH
7-7-77
L S D
28 JUN 77
DRAWN