
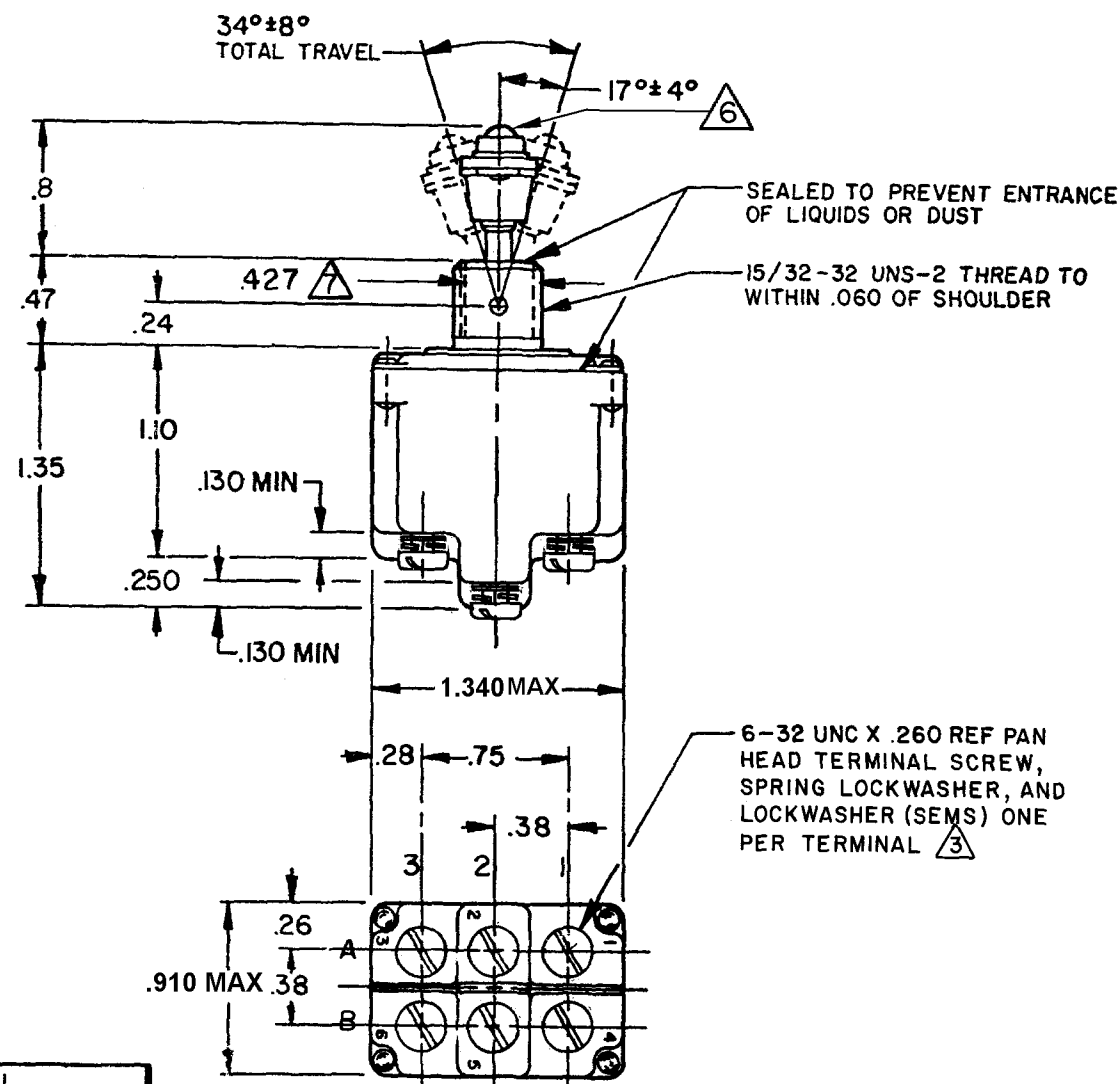


MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929




SWITCH-TOGGLE

CATALOG LISTING
2TL130 SERIES
CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

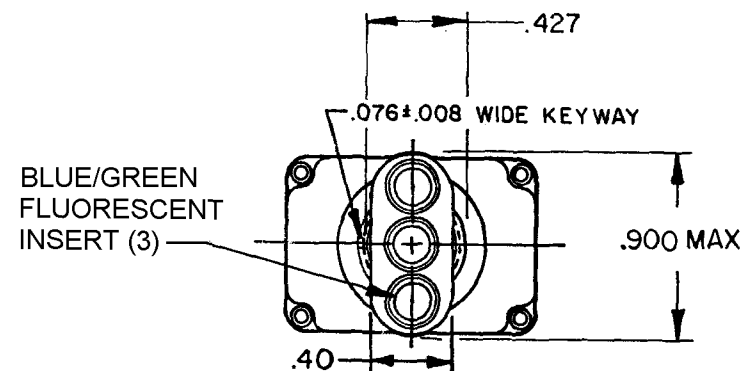

CATALOG LISTING	CIRCUIT MADE WITH TOGGLE LEVER IN			MILITARY RATING (AMPS)							
	KEYWAY SIDE (1-2,4-5)	CENTER (1-2,4-5)	OPPOSITE KEYWAY (2-3,5-6)	RESISTIVE LOAD				LAMP LOAD		INDUCTIVE LOAD	
				DC VOLTS	AC VOLTS	28 VDC	125 VAC	28 VDC	125 VAC	28 VDC	125 VAC
⑤	ON	OFF	ON								
⑥	OFF	NONE	ON								
2TL130-3	ON	NONE	ON	20	.75	.5	15	6	7	4	15
2TL130-21	NONE	OFF	ON								
2TL130-31	NONE	ON	ON								
2TL130-4	MOM OFF	NONE	ON								
2TL130-5	MOM ON	OFF	ON								
2TL130-6	MOM ON	NONE	OFF								
2TL130-7	MOM ON	OFF	MOM ON								
2TL130-8	MOM ON	NONE	ON	18	.75	.5	11	6	5	2	10
2TL130-51	NONE	ON	MOM ON								
2TL130-61	MOM ON	OFF	NONE								



NOTES

- SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- CIRCUIT DESIGNATION AND MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
- FURNISHED UNASSEMBLED
- FOR TERMINAL COVER SEE MICRO SWITCH CATALOG LISTING 5PA8
- APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS
- ULTRAVIOLET LIGHT SENSITIVE BLUE/GREEN FLUORESCENT CAP IS ATTACHED TO LEVER BY A LOCKING TYPE INTERNAL THREAD. LEVER CAP FURNISHED UNASSEMBLED
- FROM BOTTOM OF KEYWAY TO MAJOR DIA OF 15/32 THREAD

SCALE FULL
DO NOT SCALE PRINT
UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE (.0)
TWO PLACE (.00)
THREE PLACE (.000)
ANGLES
WEIGHT .12 LBS MAX