

FREEPORT, ILLINOIS, U S A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

CATALOG LISTING
2TL141 SERIES
CHART 1

MILITARY
STANDARD
NUMBER


CATALOG LISTING

**AVAILABLE
LOCKING
COMBINATIONS
FOR CONFIGURATION
SEE LETTERED
DETAILS**


CIRCUIT MADE WITH TOGGLE LEVER IN		
KEYWAY SIDE (1-2, 4-5)	CENTER (1-2, 4-5)	OPPOSITE KEYWAY (2-3, 5-6)

MILITARY RATING (AMPS)									
RESISTIVE LOAD					LAMP LOAD		INDUCTIVE LOAD		
DC VOLTS		IAC VOLTS							
28	125	250	125	250	28 VDC	125 VAC	28 VDC	125 VAC	

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

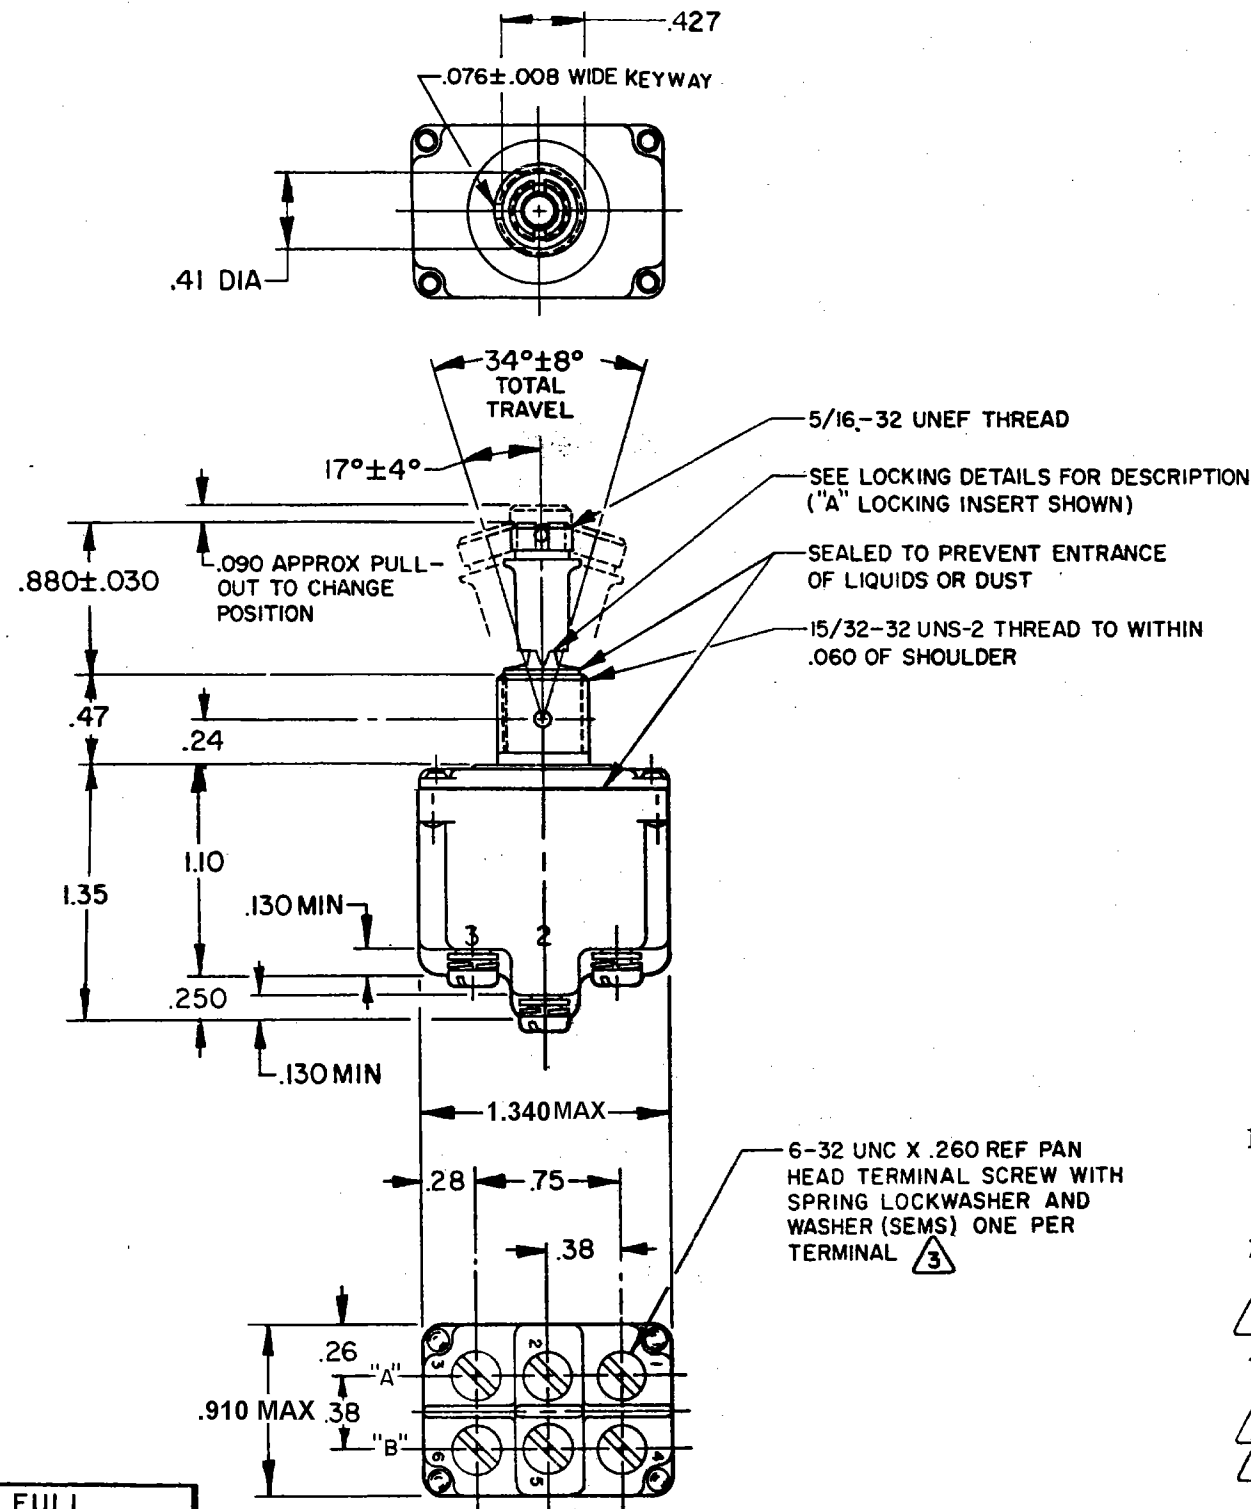

	2TLI4I-1	A,B,D,E,F,G,H,J,K,L,M,N,P	ON	OFF	ON	20	.75	.5	15	6	7	4	15	15
	2TLI4I-2	D,F,G	OFF	NONE	ON									
	2TLI4I-3	D,F,G	ON	NONE	ON									
	2TLI4I-2I	E,F,K,M	NONE	OFF	ON									
	2TLI4I-3I	E,F,K,M	NONE	ON	ON									
	2TLI4I-4	F	MOM OFF	NONE	ON	18	.75	.5	11	6	5	2	10	8
	2TLI4I-5	E,F,K,L,M,N	MOM ON	OFF	ON									
	2TLI4I-6	F	MOM ON	NONE	OFF									
	2TLI4I-7	E,L,N	MOM ON	OFF	MOM ON									
	2TLI4I-8	F	MOM ON	NONE	ON									
	2TLI4I-5I	E	NONE	ON	MOM ON									
	2TLI4I-6I	E	MOM ON	OFF	NONE									

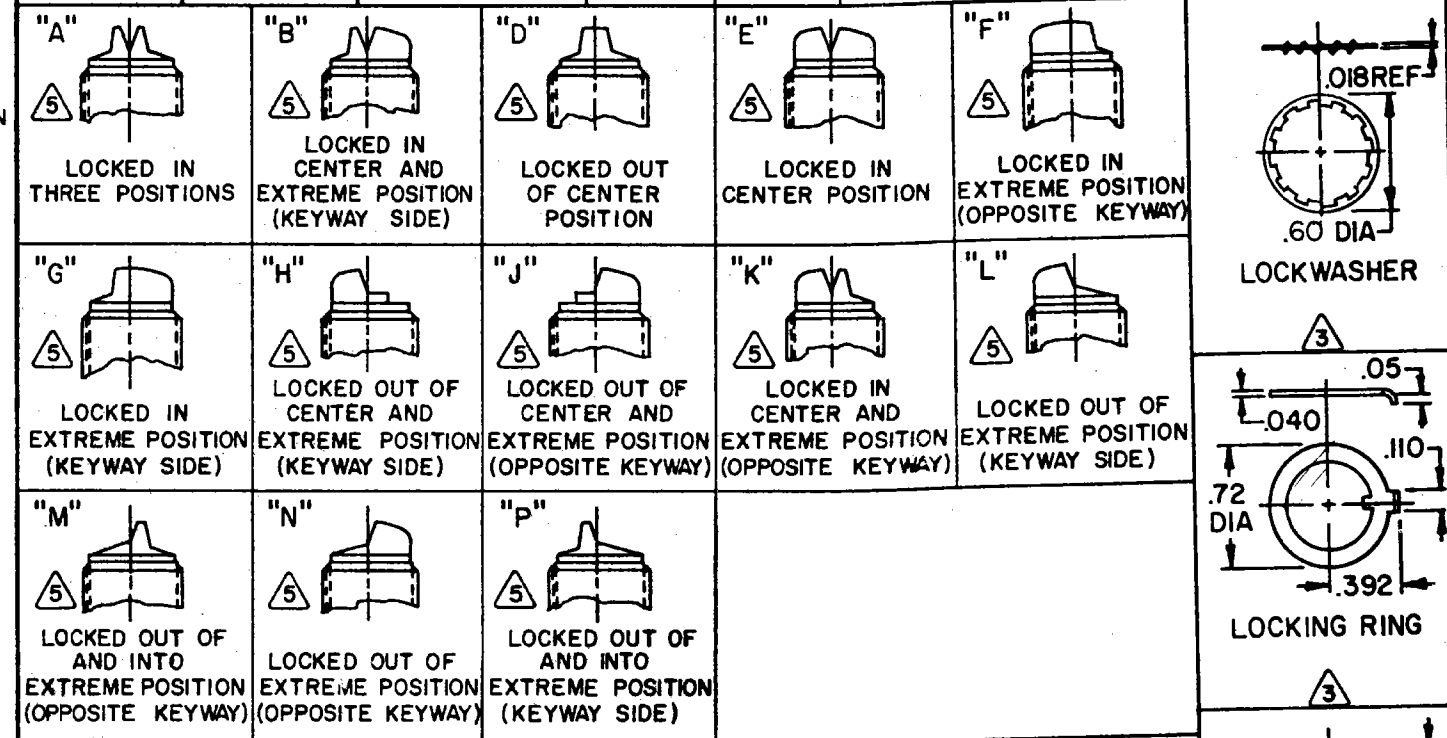

- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- 2 - MICRO SWITCH CATALOG LISTING, POLE, CIRCUIT, AND TERMINAL DESIGNATION MARKED ON SIDES OF SWITCH FURNISHED UNASSEMBLED
- 3 - FOR TERMINAL COVER SEE MICRO SWITCH CATALOG LISTING 5PA8
- 5 KEYWAY SHOWN ON LEFT SIDE
- 6 SUFFIX LETTER MUST BE ADDED FOR DESIRED TYPE OF TOGGLE LOCKING. SEE CHART FOR AVAILABLE LOCKING COMBINATIONS
- 7 APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS

DO NOT SCALE PRINT

**UNLESS OTHERWISE
NOTED**

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT 15 LBS MAX

ISSUE	M	CATALOG LISTING	2TL141 SERIES CHART 1	PAGE 1 OF 1	RELEASE NO.	PR-4580	REPLACES
6							

REVISONS	
A	OBS C034888 GLH 21 MAR 75
B	RE-INST C078497 TSM 8 JUN 94
C	CO 78047 SAD 22 AUG 94
D	0003048

REPLACES

Q

-4-

U

2
3

373

1

1

1

I

L

ЭНД

70

F

[illegible]

ME

THE

十

11

7	
---	--

Δ

CK

[illegible]

Z

1 a

NA
