


FED. MFG. CODE 91929

CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

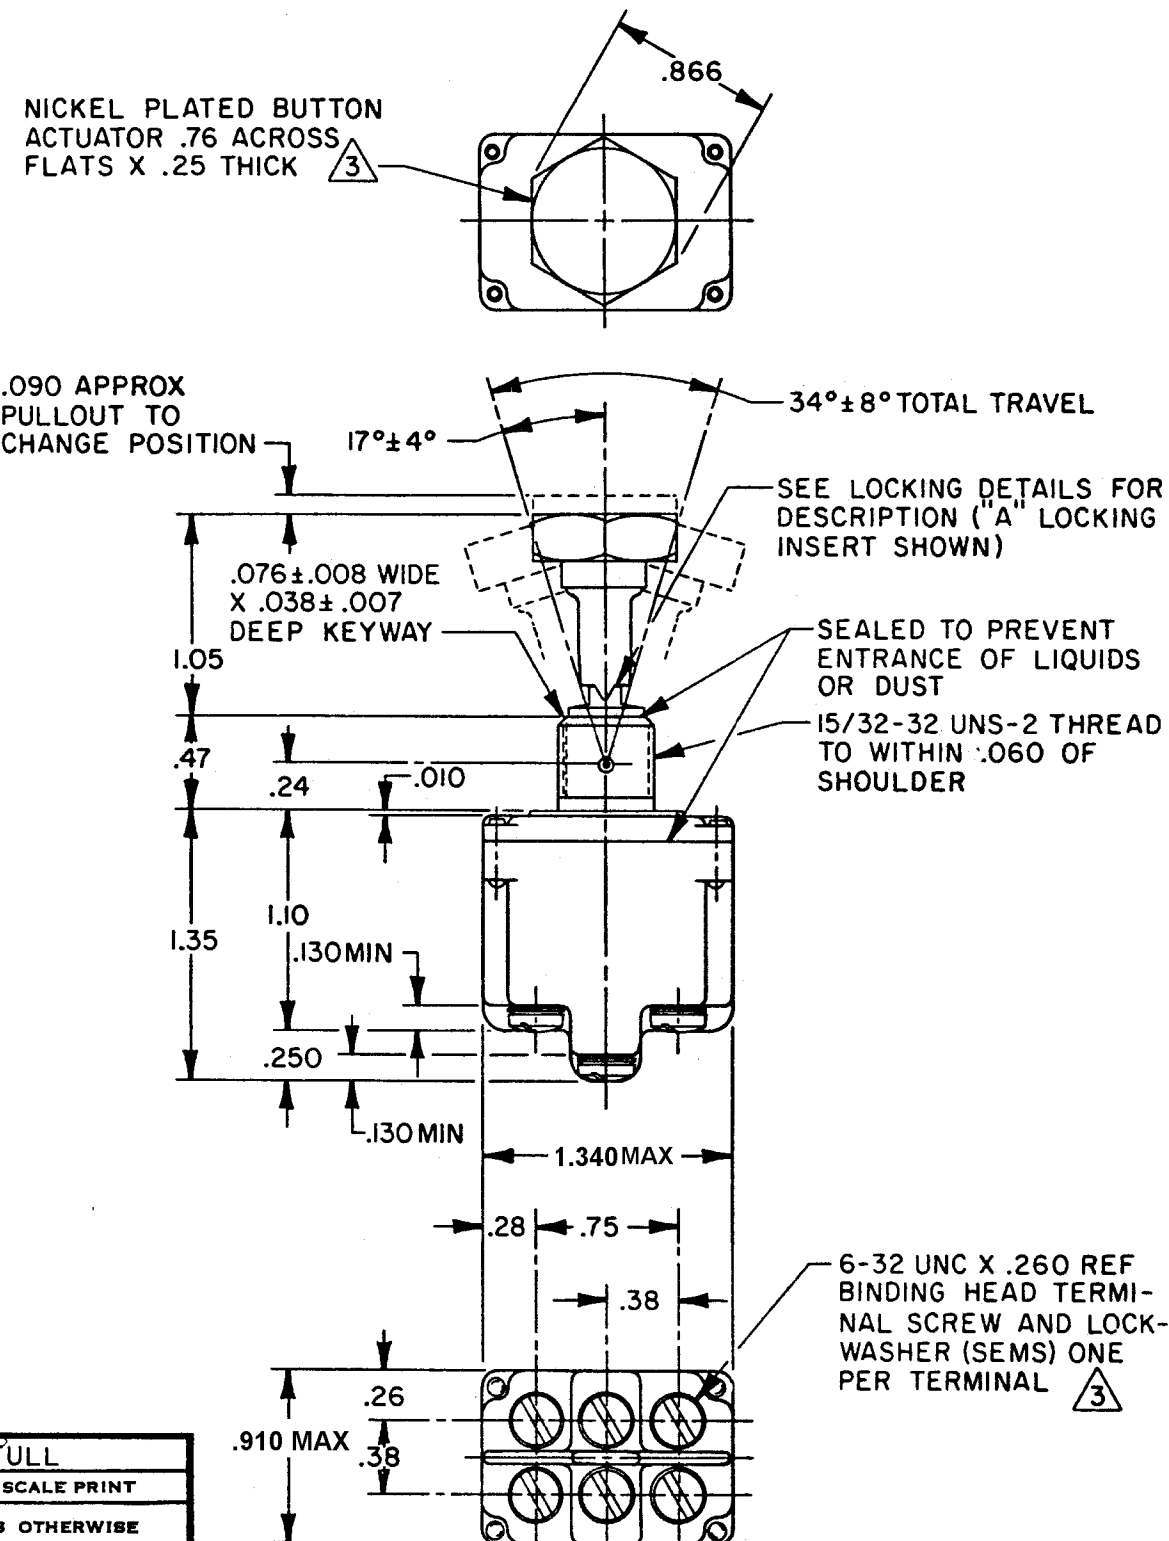


- 6-32 UNC X .260 REF
BINDING HEAD TERMI-
NAL SCREW AND LOCK-
WASHER (SEMS) ONE
PER TERMINAL 


WEIGHT .18 LB APPROX

10A 125, 250, 277 VAC
1/4 HP 125 VAC,
1/2 HP 250, 277 VAC
3A 125 VAC "L"

CATALOG LISTING 6	AVAILABLE LOCKING COMBINATIONS FOR CONFIGURATION SEE LETTERING DETAILS	CIRCUIT MADE WITH TOGGLE LEVER IN			CURRENT CAPACITY (AMPS)								
		KEYWAY SIDE (1-2,4-5)	CENTER (1-2,4-5)	OPPOSITE KEYWAY (2-3,5-6)	RESISTIVE LOAD DC VOLTS			LAMP LOAD AC VOLTS		IND. LOAD			
					28	125	250	125	250	28 VDC	125 VAC	28 VDC	125 VAC
2TL143-1	AB,D,E,F,G,H,J,K,L,M,NP	ON	OFF	ON	20	.75	.5	15	6	7	4	15	15
2TL143-2	D, F, G	OFF	NONE	ON									
2TL143-3	D, F, G	ON	NONE	ON									
2TL143-2I	E, F, K, M	NONE	OFF	ON									
2TL143-3I	E, F, K, M	NONE	ON	ON									
2TL143-4	F	MOM OFF	NONE	ON	18	.75	.5	11	6	5	2	10	8
2TL143-5	E, F, K, L, M, N	MOM ON	OFF	ON									
2TL143-6	F	MOM ON	NONE	OFF									
2TL143-7	E, L, N	MOM ON	OFF	MOM ON									
2TL143-8	F	MOM ON	NONE	ON									
2TL143-4I	F	NONE	MOM OFF	ON									
2TL143-6I	E	MOM ON	OFF	NONE									

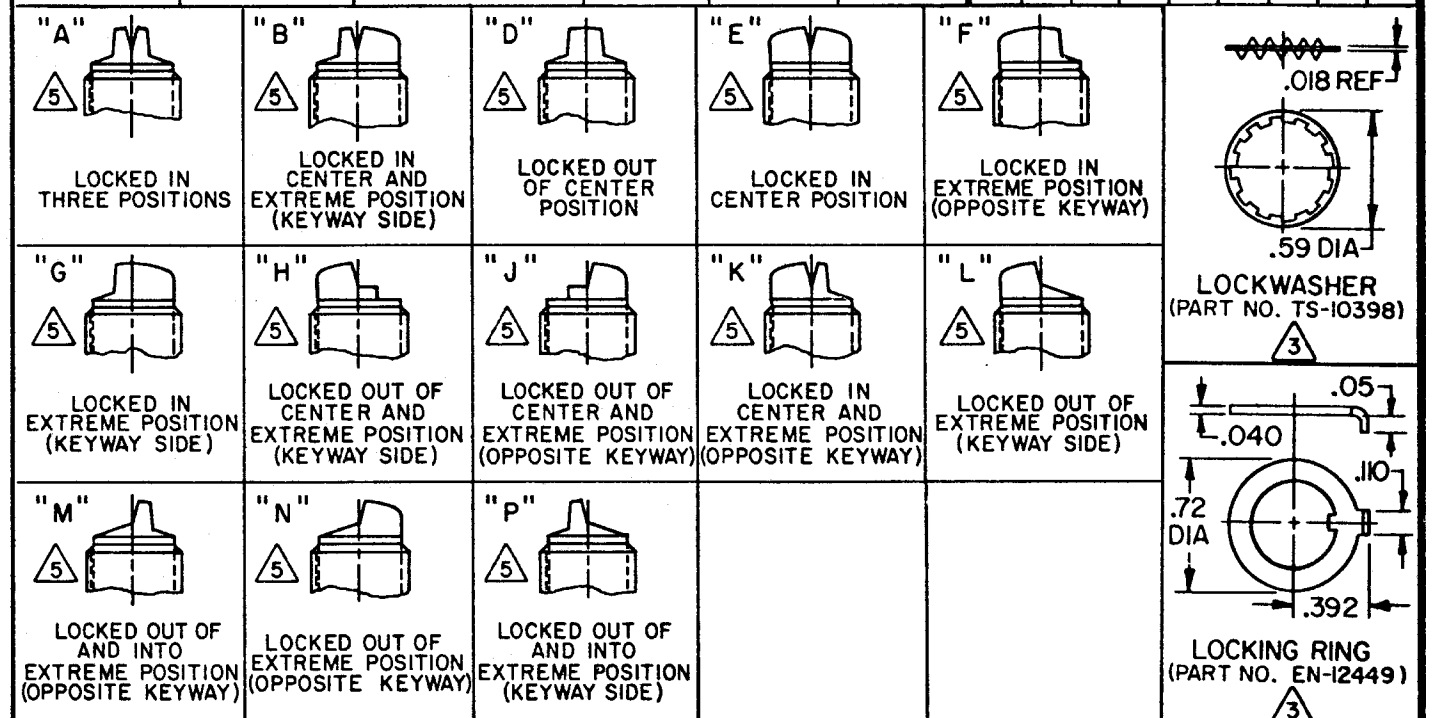

7 APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS

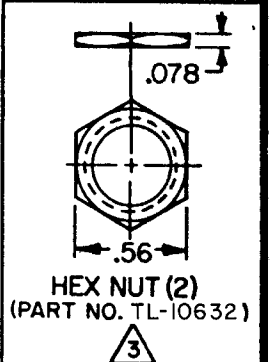

HEX NUT (2)
(PART NO. TL-10632)