

CATALOG LISTING
2TL204-50

PAGE 1 OF 1

ISSUE
2

REVISIONS
A REINST
200047
JJA
7 FEB 00

CHECK
28 NOV 95
JAF

FORMTEK
DRAWN
TSM 28 NOV 95
CHECK

MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH-TOGGLE

CATALOG LISTING
2TL204-50




THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CIRCUIT MADE WITH TOGGLE LEVER IN

KEYWAY SIDE

CENTER




OPPOSITE KEYWAY



MOMENTARY POSITION

MAINTAINED POSITION

MAINTAINED POSITION

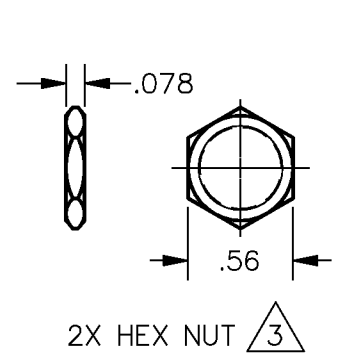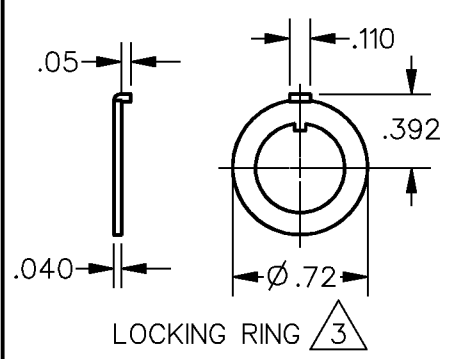
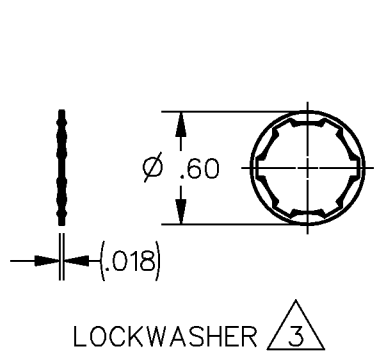


L192 10A 125, 250, 277 VAC
1/4HP 125 VAC,
1/2HP 250, 277 VAC
3A 125 VAC "L"



NOTES

- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- 2 - CIRCUIT DESIGNATION AND MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
- 3 - FURNISHED UNASSEMBLED
- 4 - FOR TERMINAL COVER SEE MICRO SWITCH CATALOG LISTING 5PA8

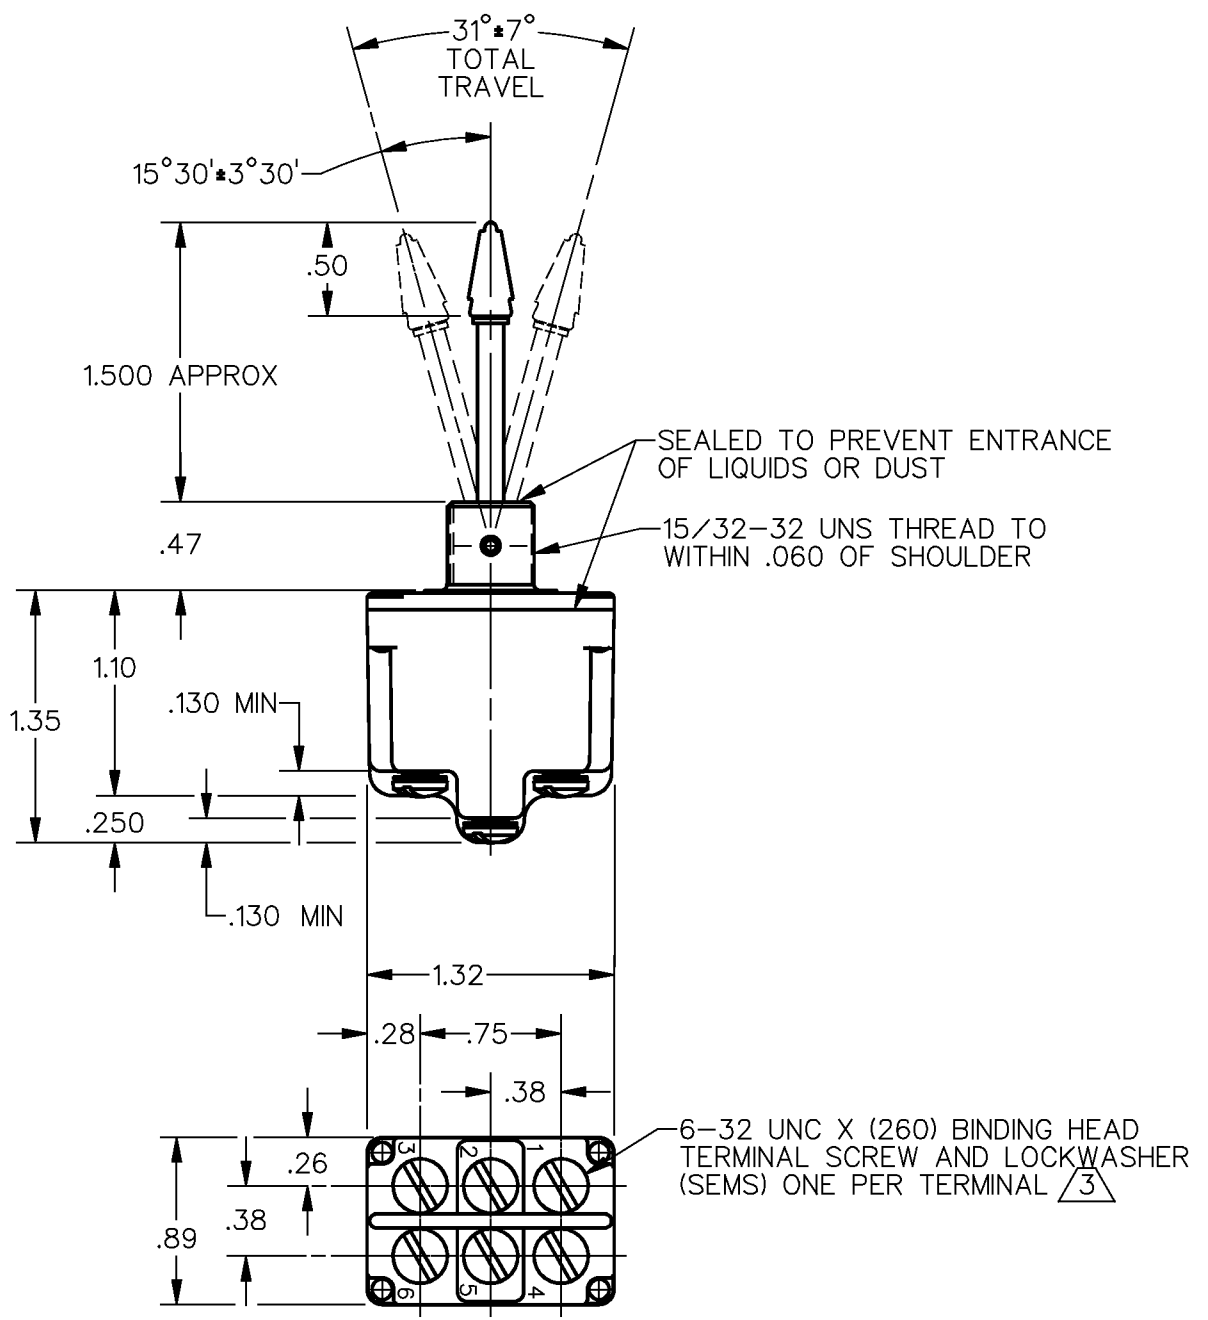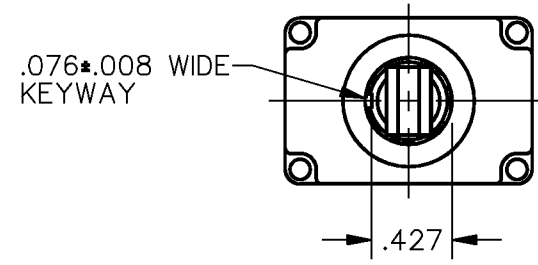

6-32 UNC X (260) BINDING HEAD
TERMINAL SCREW AND LOCKWASHER
(SEMS) ONE PER TERMINAL 3

ANSI Y14.5M-1982 APPLIES

THIRD ANGLE PROJECTION	
SCALE	FULL
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE	(.0) ±.030
TWO PLACE	(.00) ±.015
THREE PLACE	(.000) ±.005
ANGLES	±
WEIGHT	.12 LB APPROX