

MICRO SWITCH

FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-TOGGLE




CATALOG LISTING
2TL47-10





THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MILITARY RATING (AMPS)

RESISTIVE LOAD			LAMP LOAD			INDUCTIVE LOAD		
DC VOLTS	AC VOLTS		28 VDC	125 VAC	250 VDC	28 VDC	125 VAC	250 VDC
28	125	250	20	.75	.5	15	6	7
						4	15	15

CIRCUIT MADE WITH TOGGLE LEVER IN

KEYWAY SIDE	CENTER	OPPOSITE KEYWAY
		
MAINTAINED POSITION	MAINTAINED POSITION	MAINTAINED POSITION

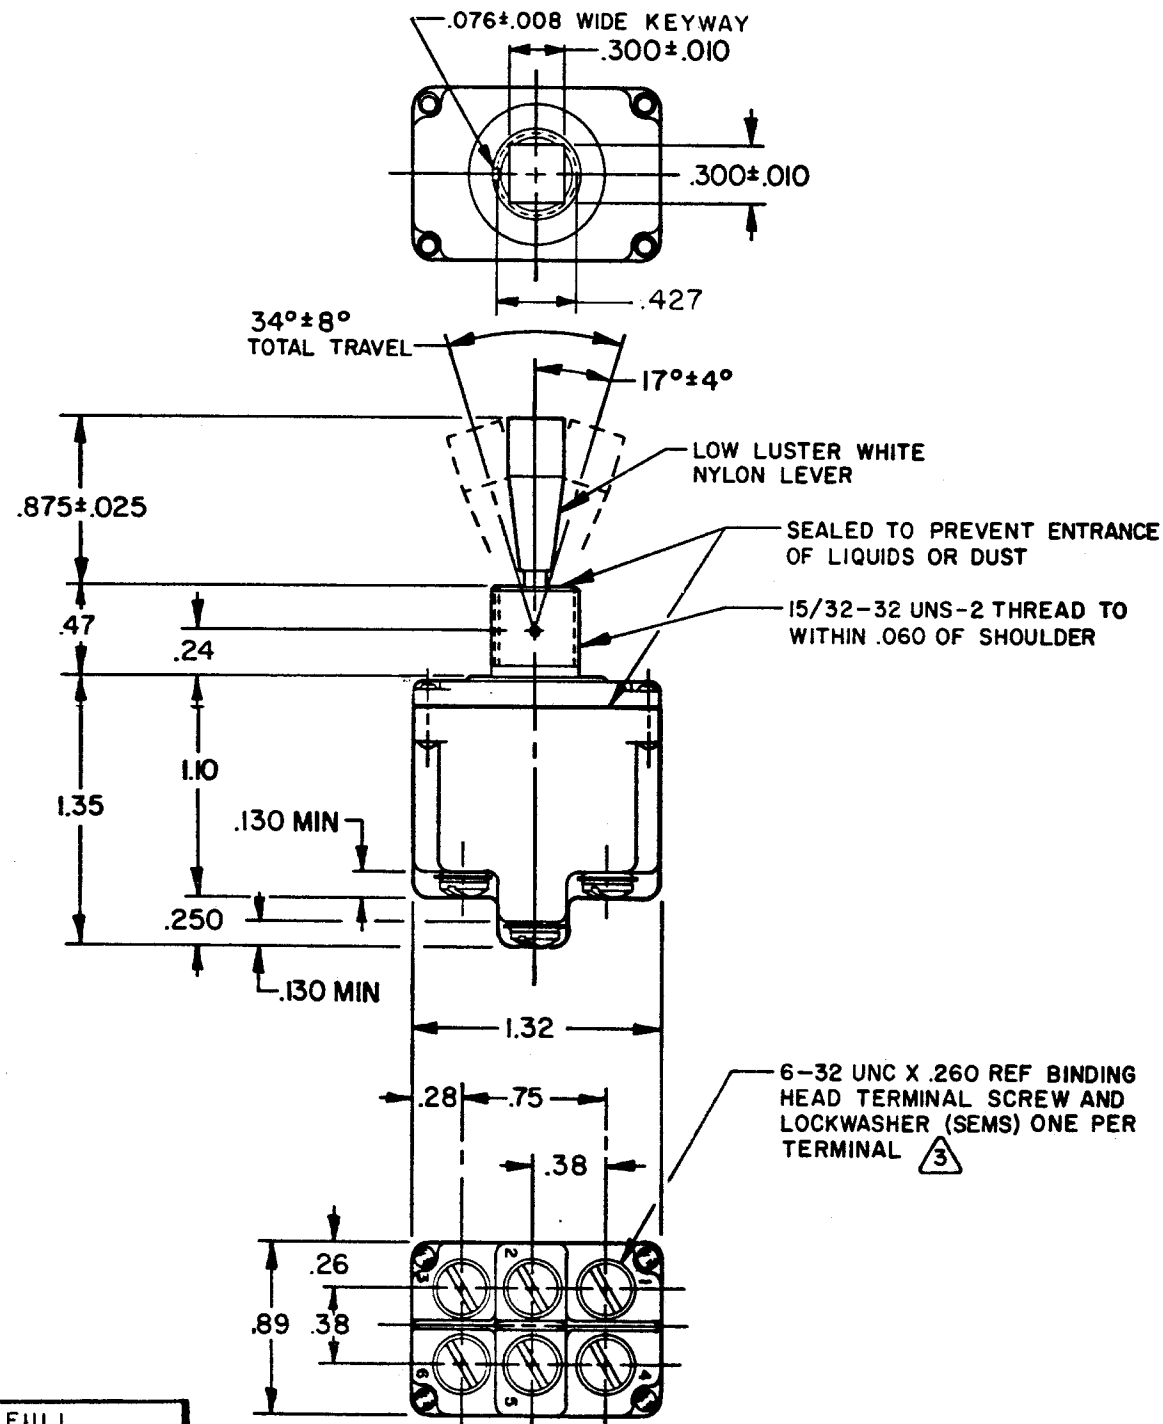

NOTES

- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- 2 - CIRCUIT DESIGNATION AND MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
- 3 - FURNISHED UNASSEMBLED
- 4 - FOR TERMINAL COVER SEE MICRO SWITCH CATALOG LISTING 5PA8

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		

WEIGHT .12 LB APPROX.

15A-125, 250 OR 277VAC
1/2HP-125VAC; 1HP-250, 277VAC
5A-125VAC "L" CODE L191

CATALOG LISTING
2TL47-10
PAGE 1 OF 1

M

DRAWING
NUMBER

8

ISSUE

REVISIONS

A	038392	J A L	11 NOV 77
B	49070	D J S	18 MAY 81
C	CO-59379	D A W	16 MAY 86
D	78047	S A D	22 AUG 94
E	CO94438	G J W	23 NOV 99

FORMTEK

DRAWN

REPLACES

RELEASE NO. SR-11572

CHECK

17 NOV 77

DEFK

CHECK

DEC 77

CHECK

DEC 77

CHECK

DEC 77

CHECK

DEC 77

CHECK

DEC 77

CHECK

DEC 77

CHECK

DEC 77

CHECK

DEC 77