


MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH - TOGGLE

2TL55 SERIES CHART 1

CATALOG LISTING

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

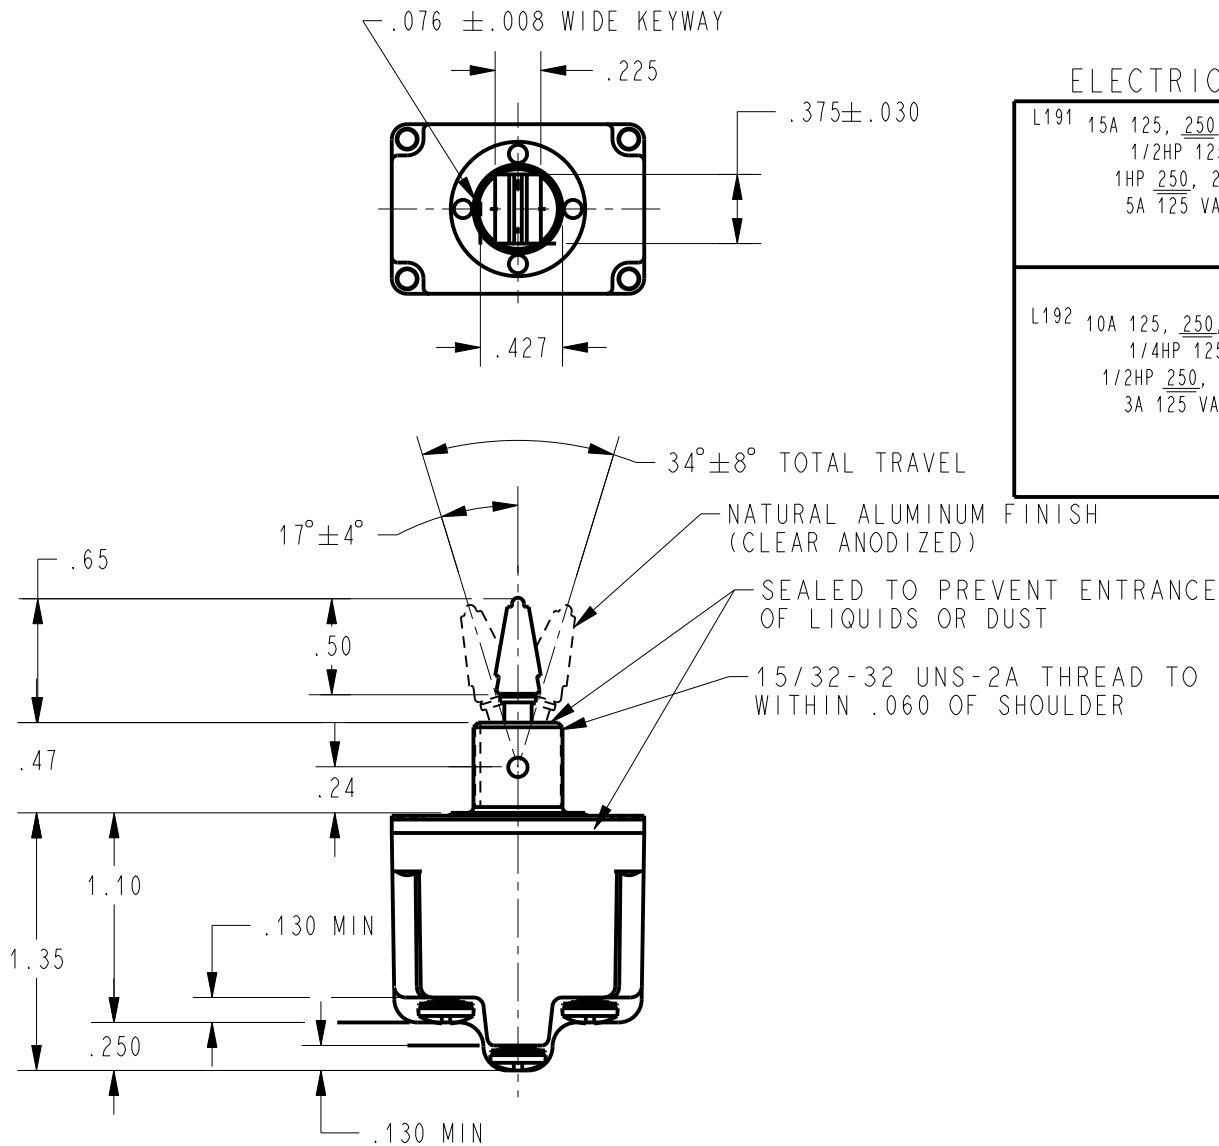

ELECTRICAL DATA

L191 15A 125, 250, 277 VAC
1/2HP 125 VAC
1HP 250, 277 VAC
5A 125 VAC "L"



L192 10A 125, 250, 277 VAC
1/4HP 125 VAC
1/2HP 250, 277 VAC
3A 125 VAC "L"



CATALOG LISTING



CIRCUIT MADE WITH TOGGLE LEVER IN

KEYWAY SIDE (1-2, 4-5)

CENTER (1-2, 4-5)

OPPOSITE KEYWAY (2-3, 5-6)

CURRENT CAPACITY (AMPS)

RESISTIVE LOAD

DC VOLTS 28 125 250 AC VOLTS 125 250

LAMP LOAD




28 125 VDC

INDUCTIVE LOAD

28 125 VAC

2TL55-1	ON	OFF	ON
2TL55-2	OFF	NONE	ON
2TL55-3	ON	NONE	ON
2TL55-21	NONE	OFF	ON
2TL55-31	NONE	ON	ON
2TL55-4	MOM OFF	NONE	ON
(B)	MOM ON	OFF	ON
2TL55-6	MOM ON	NONE	OFF
2TL55-7	MOM ON	OFF	MOM ON
2TL55-8	MOM ON	NONE	ON
2TL55-51	NONE	ON	MOM ON
2TL55-61	MOM ON	OFF	NONE


20	.75	.5	15	6	7	4	15	15
18	.75	.5	11	6	5	2	10	8

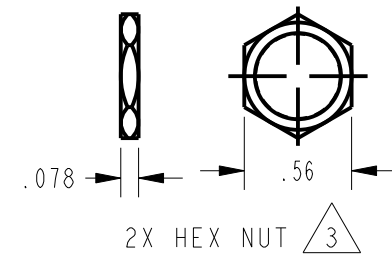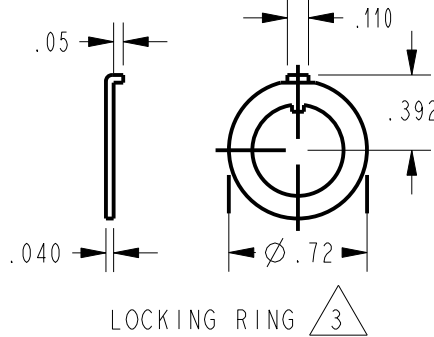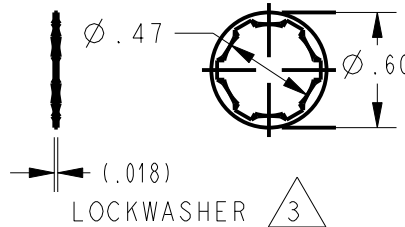

NOTES

- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- 2 - CIRCUIT DESIGNATION AND MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
- 3 - FURNISHED UNASSEMBLED
- 4 - FOR TERMINAL COVER, SEE MICRO SWITCH CATALOG LISTING 5PA8
- 5 - APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS

THIRD ANGLE PROJECTION



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT .12 LBS APPROX