

MICRO SWITCH

FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-TOGGLE

CATALOG LISTING
2TL62-10

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

M 2TL62-10

DRAWING
NUMBER

ISSUE
X 3
X 3
X 3

REPLACES

RELEASE NO. PR-2947

CHECK

18 NOV 77

CHECK

19 MAY 81

CHECK

24 APR 84

CHECK

14 DEC 88

CHECK

9 DEC 77

CHECK

14 NOV 77

CHECK

14 NOV 77

CHECK

DRAWN

SCALE FULL

DO NOT SCALE PRINT



UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:




ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .12 LB APPROX

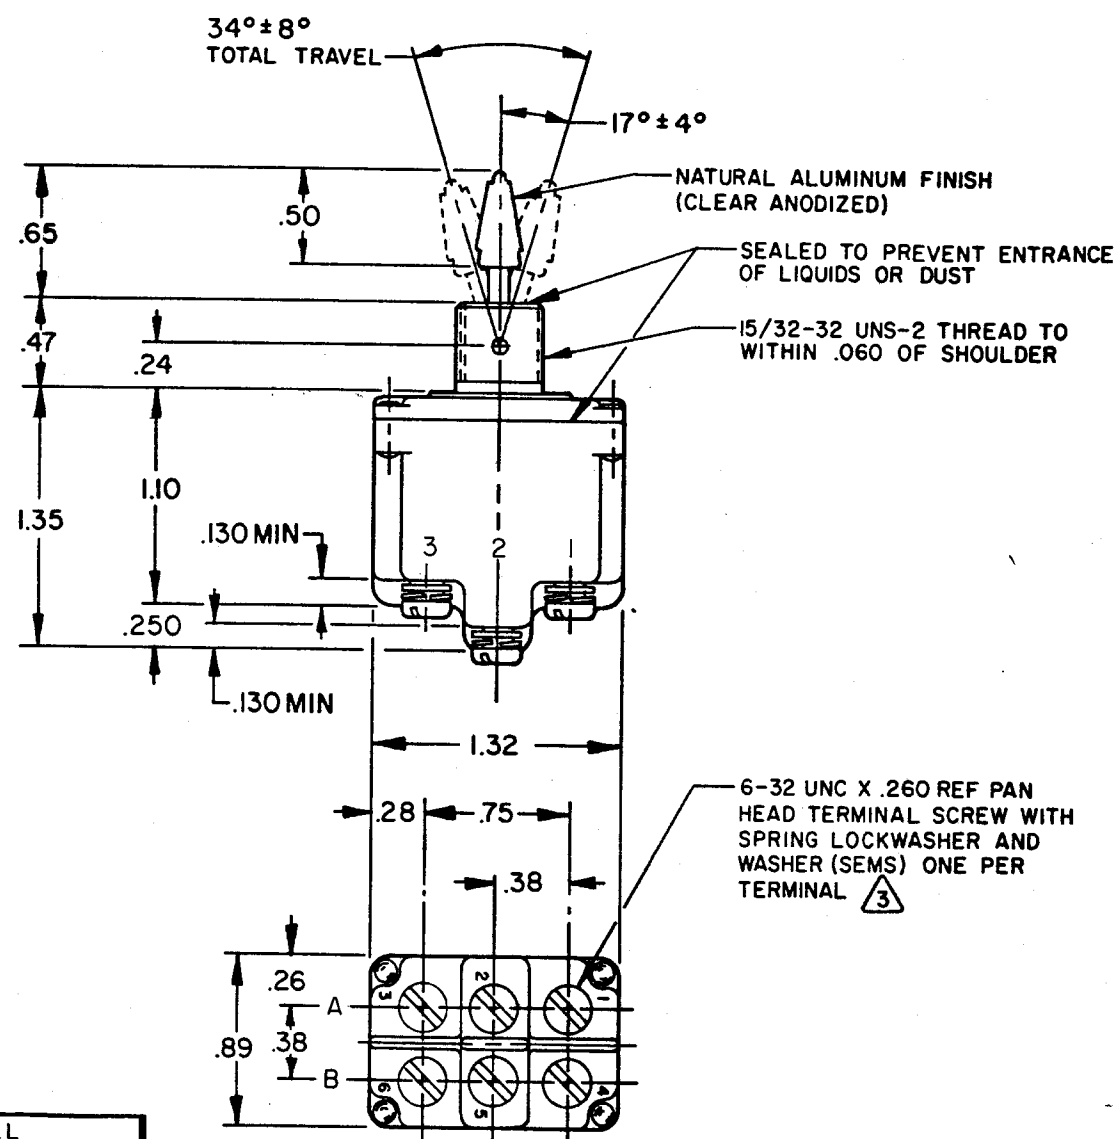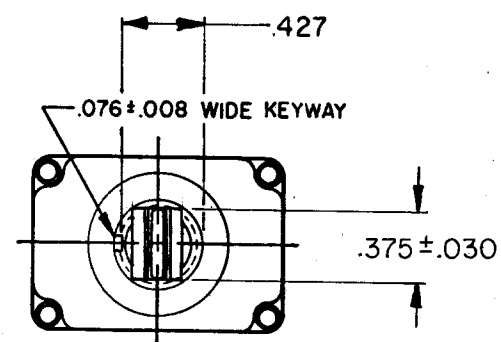

				CURRENT CAPACITY (AMPS)								
				RESISTIVE LOAD					LAMP LOAD		INDUCTIVE LOAD	
				DC VOLTS			AC VOLTS					
				28	125	250	125	250	28 VDC	125 VAC	28 VDC	125 VAC
				20	.75	.5	15	6	7	4	15	15

CIRCUIT MADE WITH TOGGLE LEVER IN		
KEYWAY SIDE	CENTER	OPPOSITE KEYWAY
MAINTAINED POSITION	MAINTAINED POSITION	MAINTAINED POSITION



NOTES

- SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- CIRCUIT DESIGNATION AND MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
- FURNISHED UNASSEMBLED
- FOR TERMINAL COVER SEE MICRO SWITCH CATALOG LISTING 5PA8