


MICRO SWITCH

FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929




SWITCH-TOGGLE

CATALOG LISTING
2TL62 SERIES
CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

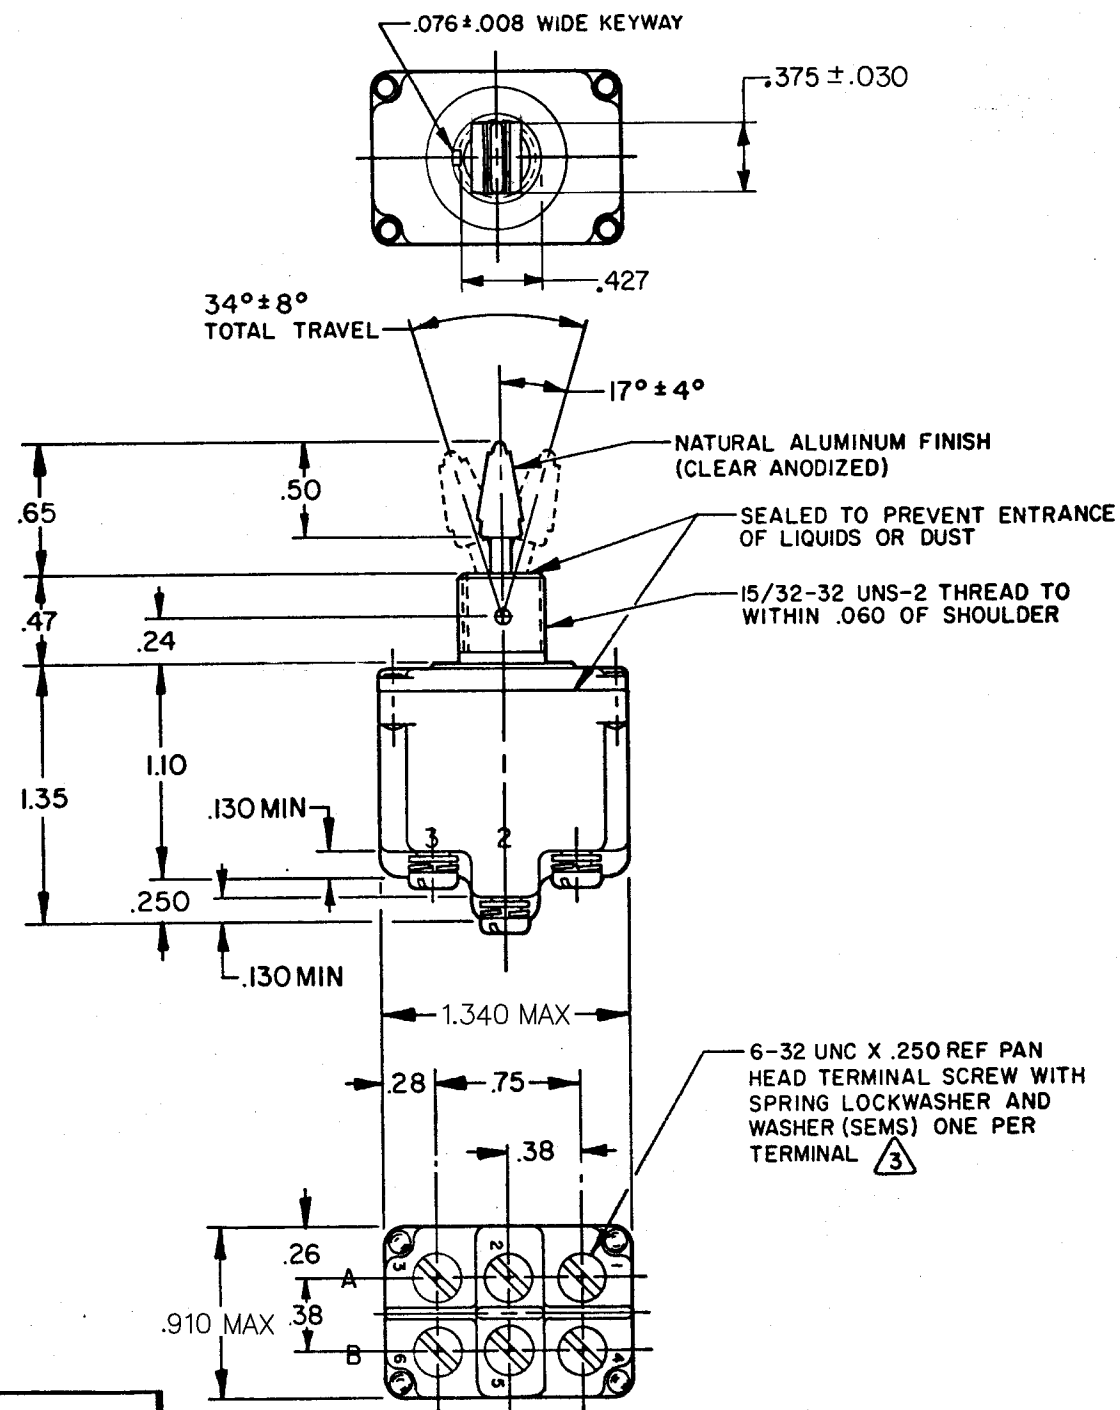

CATALOG LISTING	CIRCUIT MADE WITH TOGGLE LEVER IN				MILITARY RATING (AMPS)							
	KEYWAY SIDE (1-2,4-5)	CENTER (1-2,4-5)	OPPOSITE KEYWAY (2-3,5-6)	RESISTIVE LOAD DC VOLTS			LAMP LOAD AC VOLTS		INDUCTIVE LOAD			
				28	125	250	125	250	28 VDC	125 VAC	28 VDC	125 VAC
2TL62-1	ON	OFF	ON	20	.75	.5	15	6	7	4	15	15
2TL62- 2	OFF	NONE	ON									
2TL62- 3	ON	NONE	ON									
2TL62- 21	NONE	OFF	ON									
2TL62- 31	NONE	ON	ON									
2TL62- 4	MOM OFF	NONE	ON	18	.75	.5	11	6	5	2	10	8
2TL62- 5	MOM ON	OFF	ON									
2TL62- 6	MOM ON	NONE	OFF									
2TL62- 7	MOM ON	OFF	MOM ON									
2TL62- 8	MOM ON	NONE	ON									
2TL62- 51	NONE	ON	MOM ON									
2TL62- 61	MOM ON	OFF	NONE									
2TL62- 82	ON	NONE	MOM ON									



NOTES

- SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- POLE, CIRCUIT DESIGNATION, AND MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
- FURNISHED UNASSEMBLED
- FOR TERMINAL COVER SEE MICRO SWITCH CATALOG LISTING 5PA8
- APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES

WEIGHT .121 LB. APPROX.

CATALOG LISTING
2TL62 SERIES CHART 1
PAGE 1 OF 1
ISSUE **M**
15

REPLACES

RELEASE NO. CO-78497

CHECK

CHECK

REVISIONS

MDM

MDM

MDM

MDM

MDM

MDM

MDM

MDM

MDM

MDM

MDM

MDM

MDM

MDM

MDM

MDM

MDM

MDM

MDM

MDM

MDM