MICRO SWITCH
FREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-TOGGLE

CATALOG LISTING
2TL69 SERIES
CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

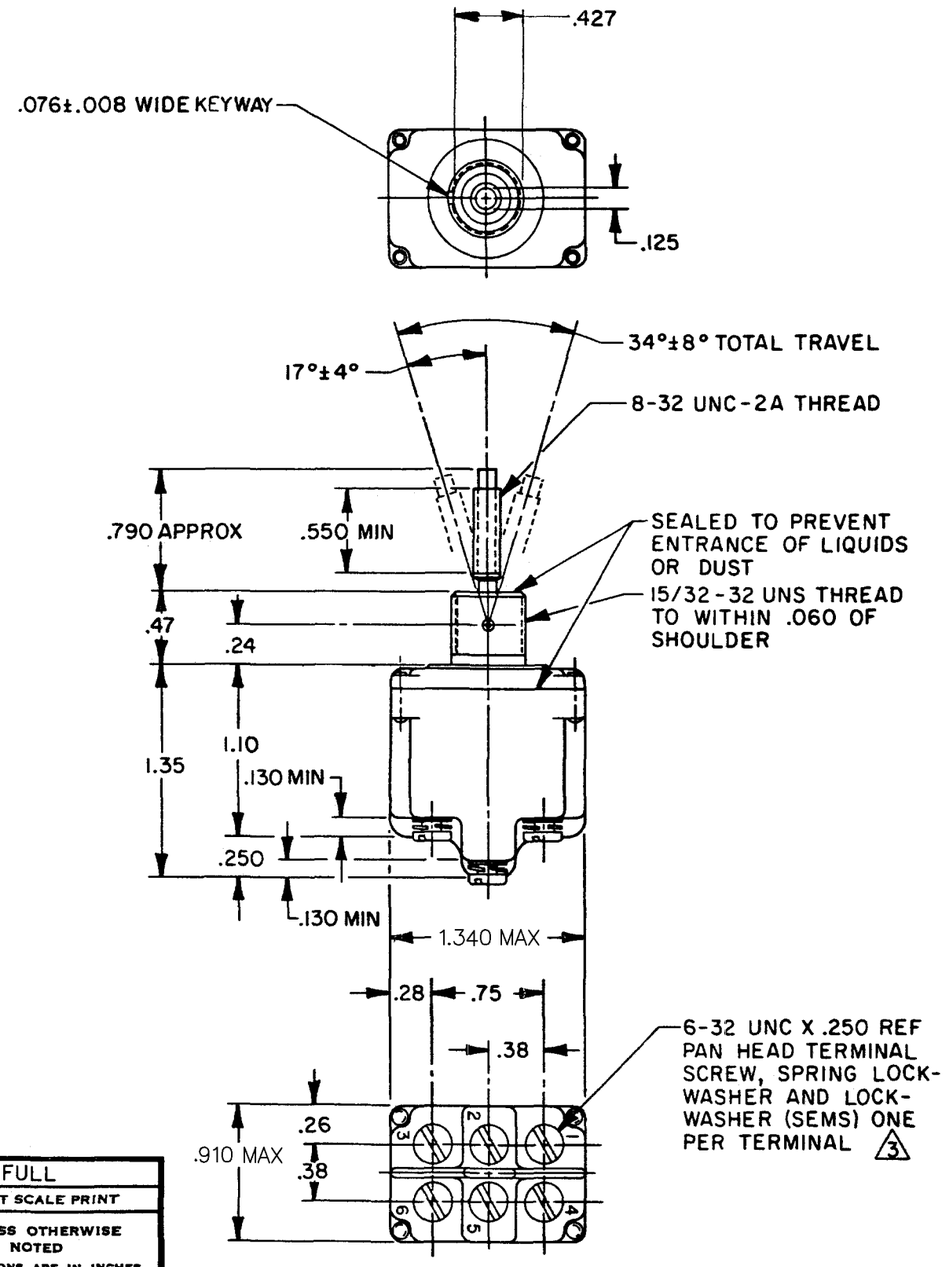

	CATALOG LISTING	CIRCUIT MADE WITH TOGGLE LEVER IN 5 KEYWAY SIDE (1-2,4-5)	CENTER (1-2,4-5)	OPPOSITE KEYWAY (2-3,5-6)	MILITARY RATING (AMPS) RESISTIVE LOAD DC VOLTS 28	125	250	AC VOLTS 125	250	LAMP LOAD 28 VDC	125 VAC	INDUCTIVE LOAD 28 VDC	125 VAC
	2TL69-1	ON	OFF	ON	20	.75	.5	15	6	7	4	15	15
	2TL69-2	OFF	NONE	ON									
	2TL69-3	ON	NONE	ON									
	2TL69-21	NONE	OFF	ON									
	2TL69-31	NONE	ON	ON									
					(REFER TO L191 FOR UL RATING)								
	2TL69-4	MOM OFF	NONE	ON	18	.75	.5	11	6	5	2	10	8
	2TL69-5	MOM ON	OFF	ON									
	2TL69-6	MOM ON	NONE	OFF									
	2TL69-7	MOM ON	OFF	MOM ON									
	2TL69-8	MOM ON	NONE	ON									
					(REFER TO L192 FOR UL RATING)								
	2TL69-51	NONE	ON	MOM ON									
	2TL69-61	MOM ON	OFF	NONE									

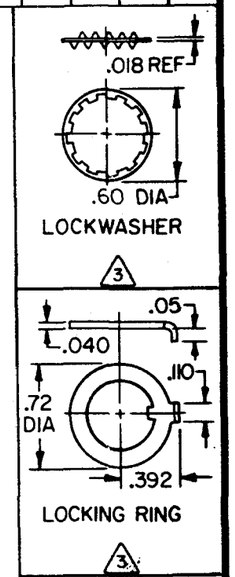

NOTES
1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
2 - CIRCUIT DESIGNATION AND MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
3 - FURNISHED UNASSEMBLED
4 - FOR TERMINAL COVER SEE MICRO SWITCH CAT. LIST. 5PA8
5 - APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS

SCALE FULL
DO NOT SCALE PRINT
UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±0°30'

WEIGHT .12 LB APPROX

15A-125,250 OR 277VAC
1/2HP-125VAC;1HP-250,277VAC
5A-125VAC "L" CODE L191

10A-125,250,277VAC
1/4HP-125VAC;1/2HP-250,277VAC
3A-125VAC "L" CODE L192

CATALOG LISTING M 2TL69 SERIES CHART 1 PAGE 1 OF 1
ISSUE 4
REVISIONS
A CO 78047 SAD 23AUG 94
B CO-94439 CSL 24 NOV 99
C 0003037 TSG 06 FEB 04
RELEASE NO. CO-78497 REPLACES 2TL69 SERIES

	DRAWN	CHECK	CHECK	CHECK	CHECK
FORMTEK	TSM 9 JUN 94	KAG 7 JUL 94	MDM 06 FEB 04		