




THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

LUG SIDE  
(MOMENTARY POSITION)


CENTER  
(MAINTAINED POSITION)

OPPOSITE LUG  
(MAINTAINED POSITION)



### ELECTRICAL DATA


L192 10A 125, 250, 277 VAC  
1/4HP 125 VAC,  
1/2HP 250, 277 VAC  
3A 125 VAC "L"

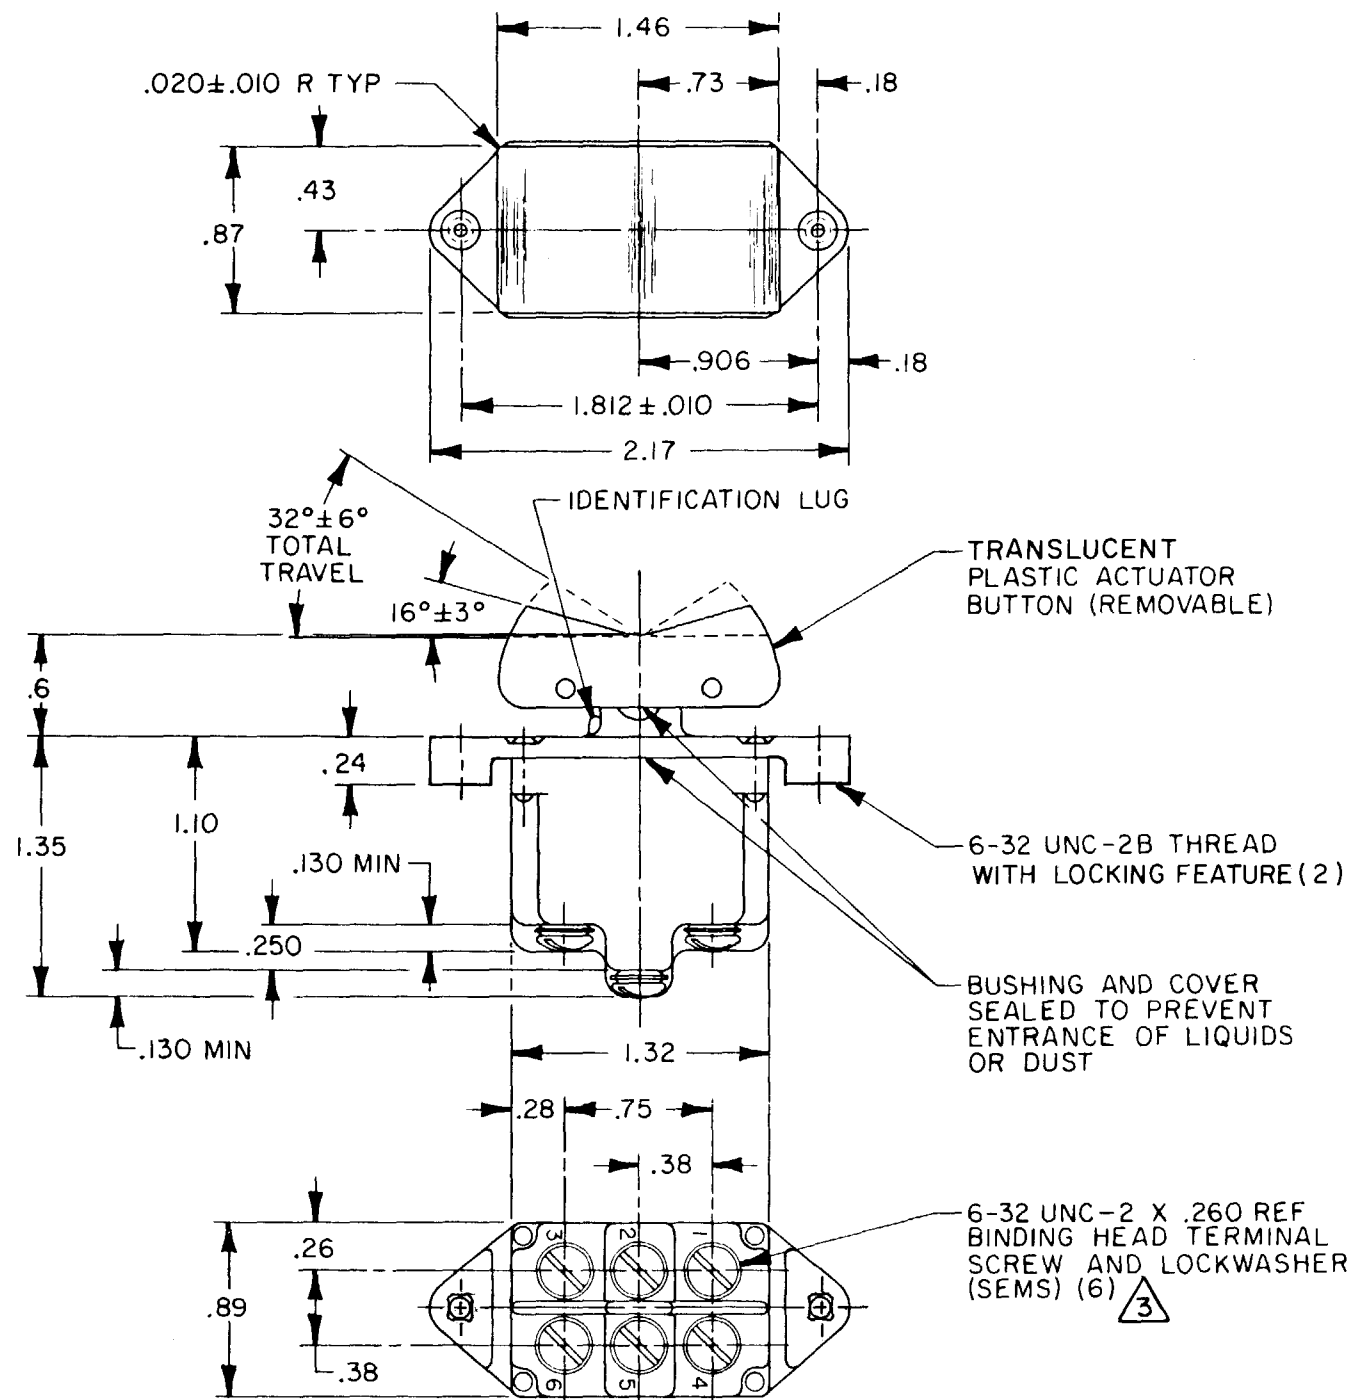

## NOTES

- 1 - CIRCUIT DESIGNATION AND MICRO SWITCH CATALOG LISTING  
STAMPED ON SIDE OF SWITCH
- 2 - SWITCHES WILL WITHSTAND TEMPERATURE OF 160°F
- ③ - SCREWS FURNISHED UNASSEMBLED

[illegible]

|                                                                                     |                                     |                                                    |                                                          |
|-------------------------------------------------------------------------------------|-------------------------------------|----------------------------------------------------|----------------------------------------------------------|
| <b>THIRD ANGLE PROJECTION</b>                                                       |                                     |                                                    |                                                          |
|  |                                     |                                                    |                                                          |
| <b>SCALE FULL</b>                                                                   |                                     |                                                    |                                                          |
| <b>DO NOT SCALE PRINT</b>                                                           |                                     |                                                    |                                                          |
| <b>TOLERANCES</b>                                                                   |                                     |                                                    |                                                          |
| APPLY TO DESIGN UNITS CONVERSIONS ARE FOR<br>REFERENCE UNLESS NOTED TOLERANCES ARE  |                                     |                                                    |                                                          |
| NO PLACES<br>ONE PLACE<br>TWO PLACES<br>THREE PLACES<br>ANGLES                      | DIM.<br>mm<br><br>X<br>X,X<br>X,X,X | TOL.<br>mm/in<br><br>1/40<br>0.4/0.16<br>0.15/1/32 | DIM.<br>in<br><br>X<br>X,X<br>X,XXX                      |
|                                                                                     |                                     |                                                    | TOL.<br>mm/in<br><br>0.8/0.3<br>0.36/0.015<br>0.13/0.005 |
| <b>DESIGN UNITS</b>                                                                 |                                     | S: METRIC                                          | US CUSTOMARY                                             |
| <b>WEIGHT .13 LB EST</b>                                                            |                                     |                                                    |                                                          |