


MICRO SWITCH
FREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL
FED MFG CODE 91929

SWITCH-TOGGLE
ABOVE PANEL MOUNT

CATALOG LISTING
2TP55 SERIES
CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

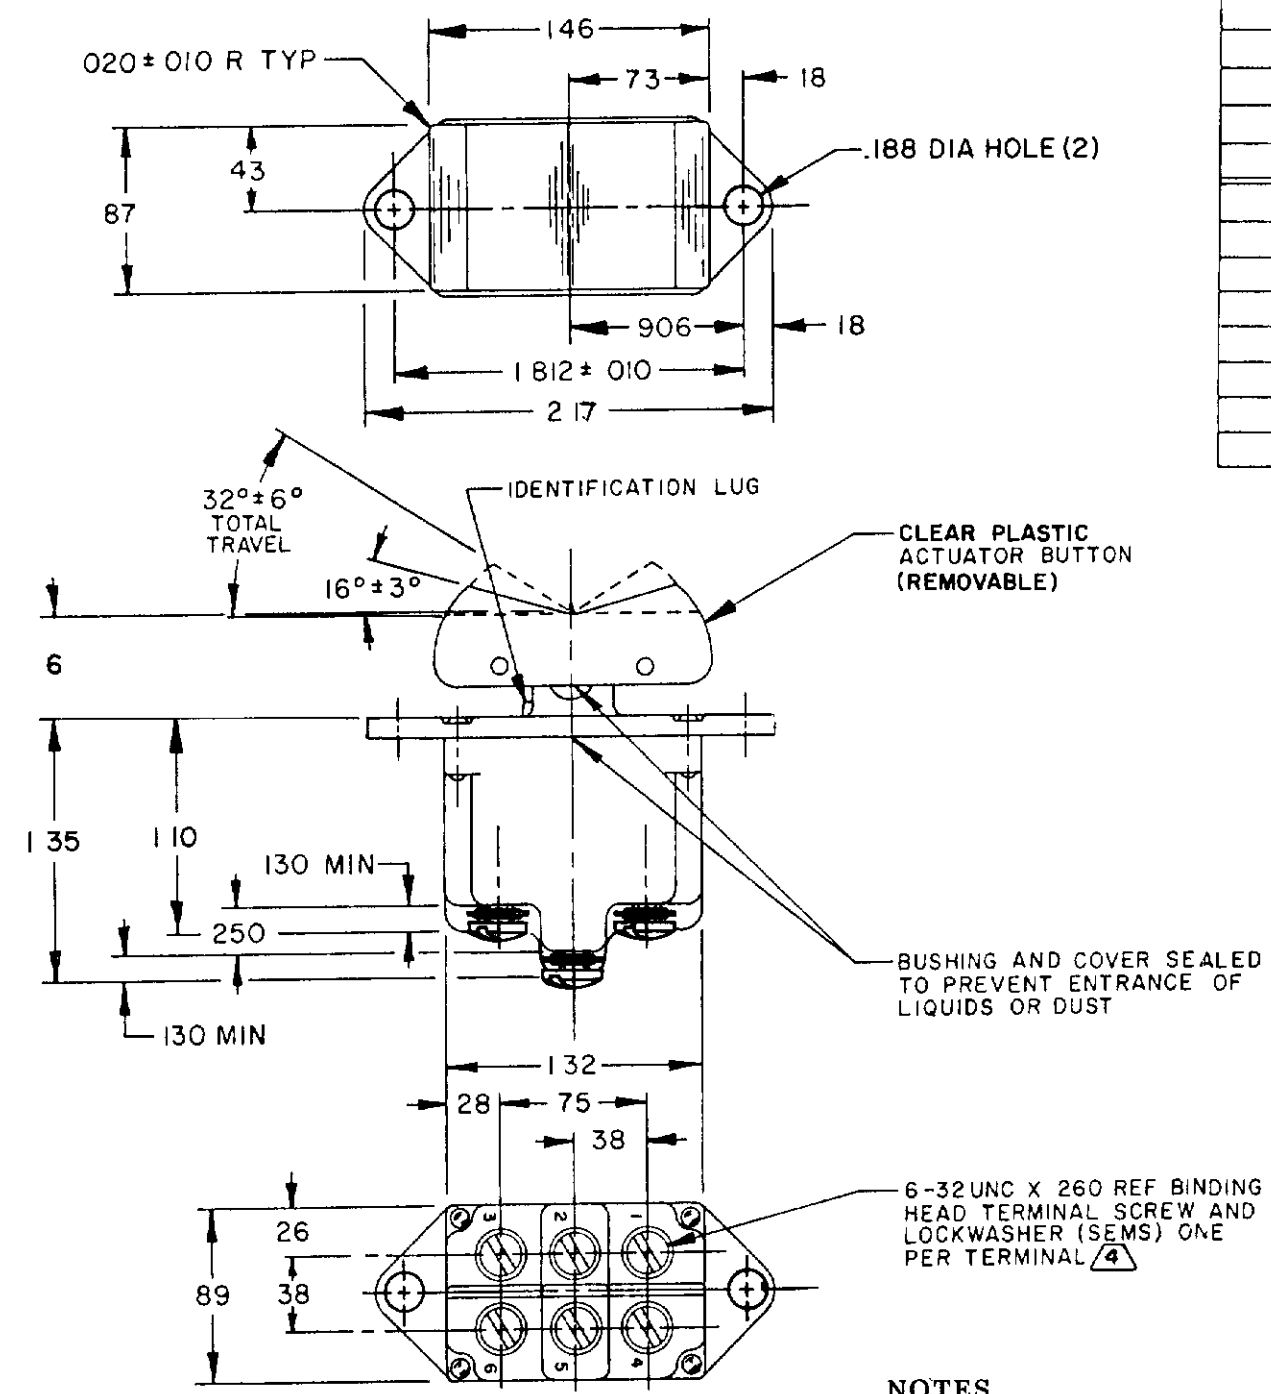

CATALOG LISTING	CIRCUIT WITH BUTTON IN		
	OPPOSITE LUG SIDE	CENTER	LUG SIDE
2TP55-1	ON	OFF	ON
2TP55-2	ON	NONE	OFF
2TP55-3	ON	NONE	ON
2TP55-2I	ON	OFF	NONE
2TP55-3I	ON	ON	NONE
2TP55-4	ON	NONE	MOM OFF
2TP55-5	ON	OFF	MOM ON
2TP55-6	OFF	NONE	MOM ON
2TP55-7	MOM ON	OFF	MOM ON
2TP55-8	ON	NONE	MOM ON
2TP55-5I	MOM ON	ON	NONE
2TP55-6I	NONE	OFF	MOM ON

15A-125, 250 OR 277 VAC 1/2HP-125VAC; 1HP-250, 277VAC 5A-125VAC "L" CODE L191	UL CE
10A-125, 250, 277 VAC 1/4HP-125VAC; 1/2HP-250, 277VAC 3A-125VAC "L" CODE L192	UL CE

- NOTES
- 1 - MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
 - 2 - APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS
 - 3 - THESE SWITCHES WILL WITHSTAND TEMPERATURE OF 160° F
 - 4 - SCREWS FURNISHED UNASSEMBLED

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM	TOL	DIM	TOL
mm	mm/in	in	mm/in
NO PLACES	± .04	NO PLACES	± .04
ONE PLACE	± .04	ONE PLACE	± .04
TWO PLACES	± .02	TWO PLACES	± .02
THREE PLACES	± .01	THREE PLACES	± .01

DESIGN UNITS

SI METRIC

US CUSTOMARY

RAW MATERIAL—COMMERCIAL STANDARD

MICRO SWITCH STANDARDS APPLY

DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED

WEIGHT 13 LB EST