
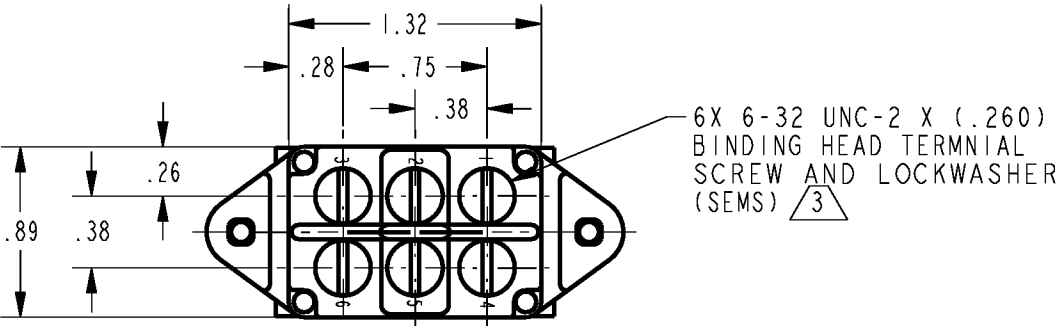
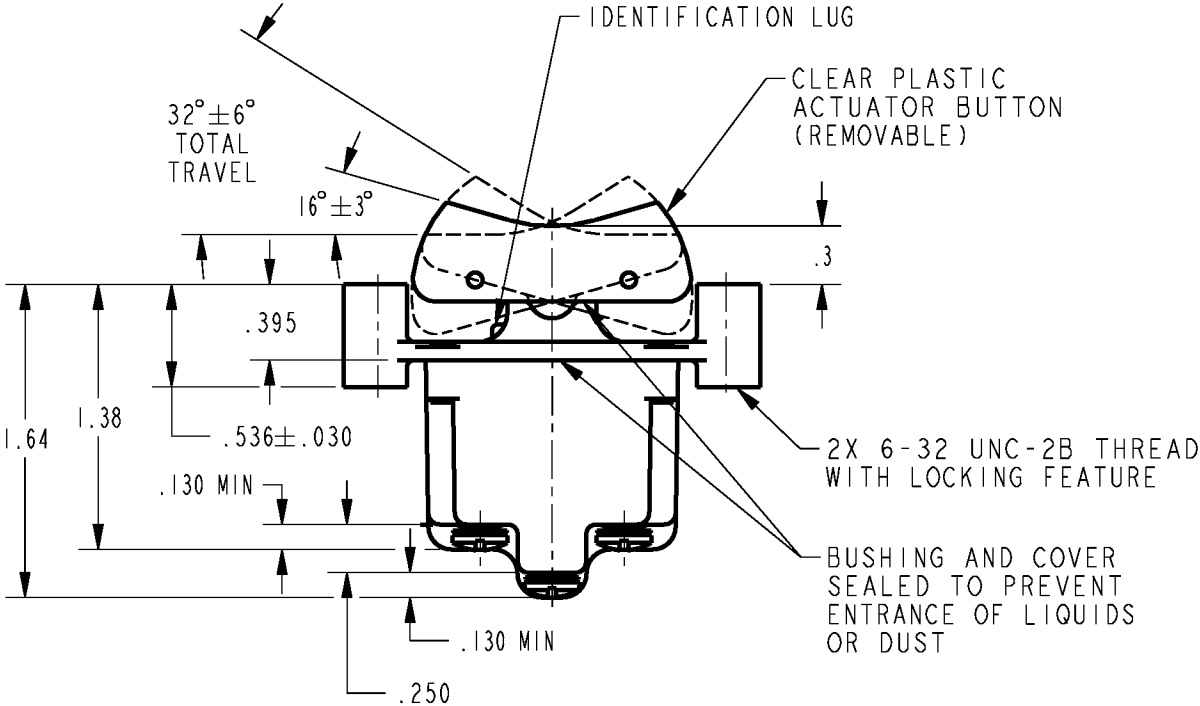


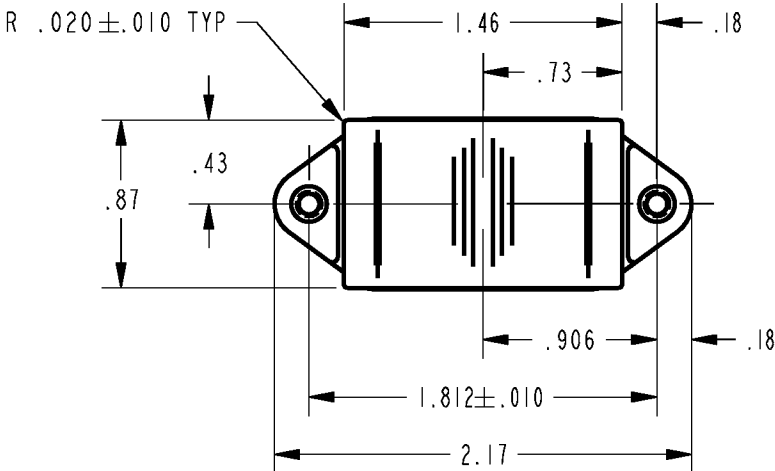


MICROSWITCH
a Honeywell Division
FED. MFG. CODE 91929



**SWITCH - TOGGLE
FLUSH KEY**


CATALOG LISTING
**2TP72 SERIES
CHART 1**

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH



CATALOG LISTING	CIRCUIT MADE WITH BUTTON DEPRESSED ON 			ELECTRICAL DATA
	LUG SIDE (1-2, 4-5)	CENTER (1-2, 4-5)	OPPOSITE LUG (2-3, 5-6)	
2TP72-1	ON	OFF	ON	L191 15A 125, <u>250</u> , 277 VAC 1/2HP 125 VAC 1HP <u>250</u> , 277 VAC 5A 125 VAC "L" 
2TP72-2	OFF	NONE	ON	
2TP72-3	ON	NONE	ON	
2TP72-21	NONE	OFF	ON	
2TP72-31	NONE	ON	ON	
2TP72-4	MOM OFF	NONE	ON	L192 10A 125, <u>250</u> , 277 VAC 1/4HP 125 VAC, 1/2HP <u>250</u> , 277 VAC 3A 125 VAC "L" 
2TP72-5	MOM ON	OFF	ON	
2TP72-6	MOM ON	NONE	OFF	
2TP72-7	MOM ON	OFF	MOM ON	
2TP72-8	MOM ON	NONE	ON	
2TP72-51	NONE	ON	MOM ON	
2TP72-61	MOM ON	OFF	NONE	

- NOTES
- 1 - SWITCH WILL WITHSTAND TEMPERATURE OF 160°F
 - 2 - MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
 -  3 - SCREWS FURNISHED UNASSEMBLED
 -  4 - APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS
 - 5 - GOLD PLATED CONTACTS

THIRD ANGLE PROJECTION	
	
SCALE	FULL
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE	(.0) ±.030
TWO PLACE	(.00) ±.015
THREE PLACE	(.000) ±.005
ANGLES	±
WEIGHT	.14 LB EST