

FED.MFG.CODE 91929

SWITCH-BASIC

CATALOG LISTING

2TT7-LH

CATALOG LISTING

2TT7-LH

REPLACES

RELEASE NO. CO-82580

CHECK

CHECK

CHECK

1 JK	7 MAR 96
------	----------


REVISIONS

DDM/CAD

DRAWN

CHECK

1 JK	7 MAR 96
------	----------

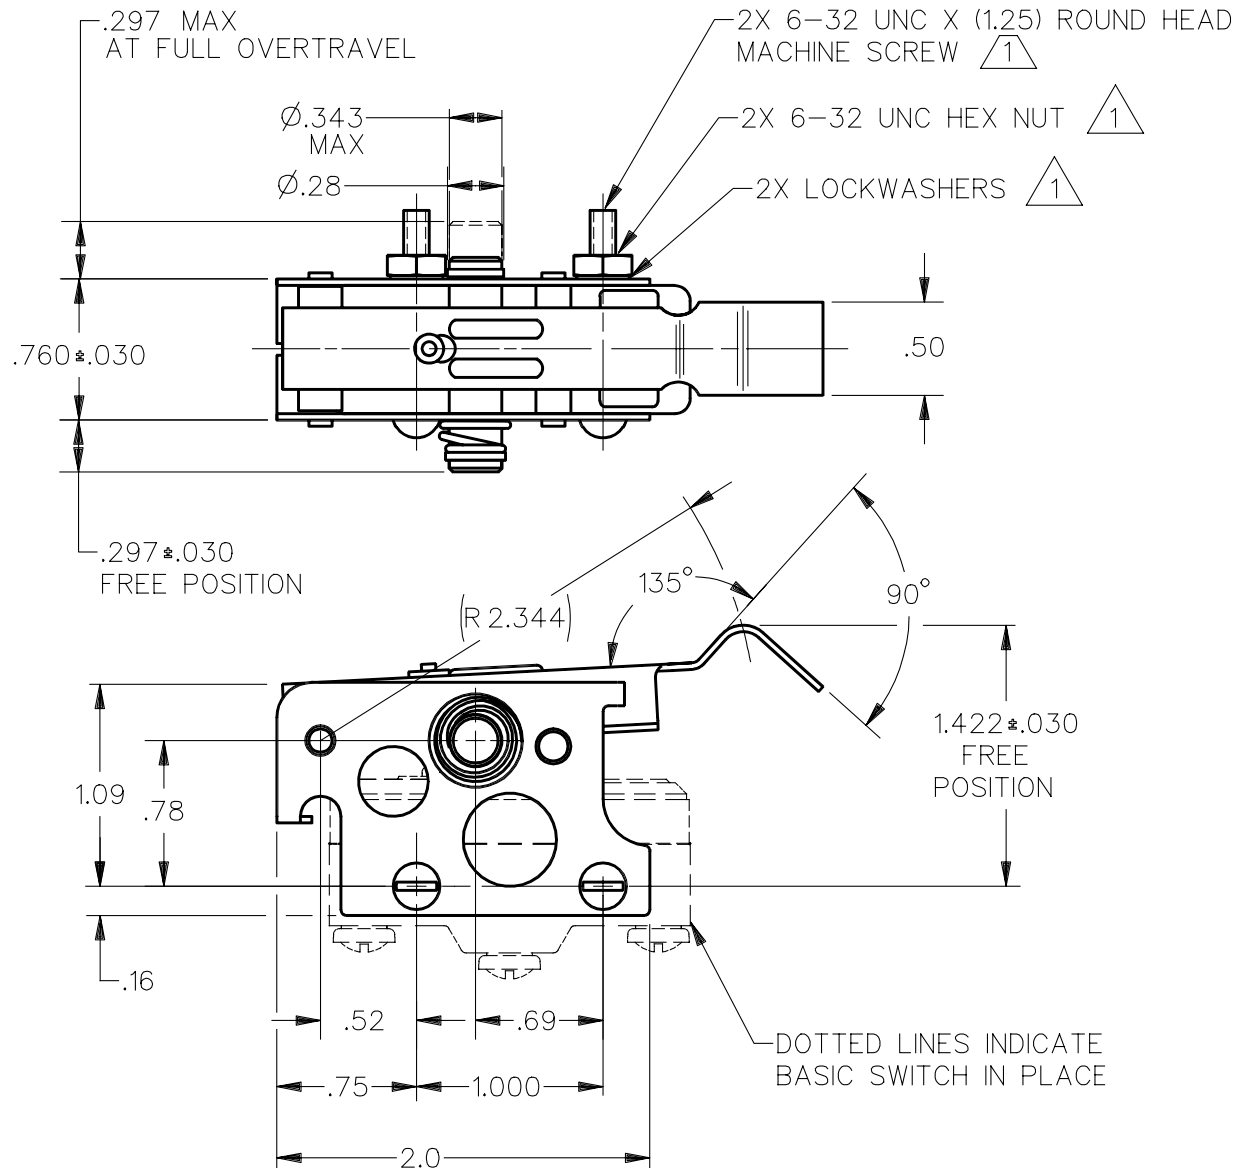

NOTE


 1 FURNISHED UNASSEMBLED

2 - SWITCH WILL PERFORM SATISFACTORILY IN TEMPERATURES TO MINUS 65°F

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE	— — —	1 LB MAX
OVERTRAVEL FORCE	— — —	2 LB MAX
RELEASE FORCE	— — —	1/4 LB MIN
PRETRAVEL	— — —	.188 MAX
DIFFERENTIAL TRAVEL	— — —	.025 MAX
OVERTRAVEL	— — —	.219 MIN

RESET CHARACTERISTICS

RESET OPERATING FORCE	— — —	4 LB MAX
RESET OVERTRAVEL	— — — — —	.060 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT

SCALE	FULL
-------	------

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (. 0) $\pm .030$

TWO PLACE (.00) $\pm .015$ THREE PLACE (.000) $\pm .005$

ANGLES +

WEIGHT	.11 LB	LESS BASIC SWITCH
--------	--------	-------------------