


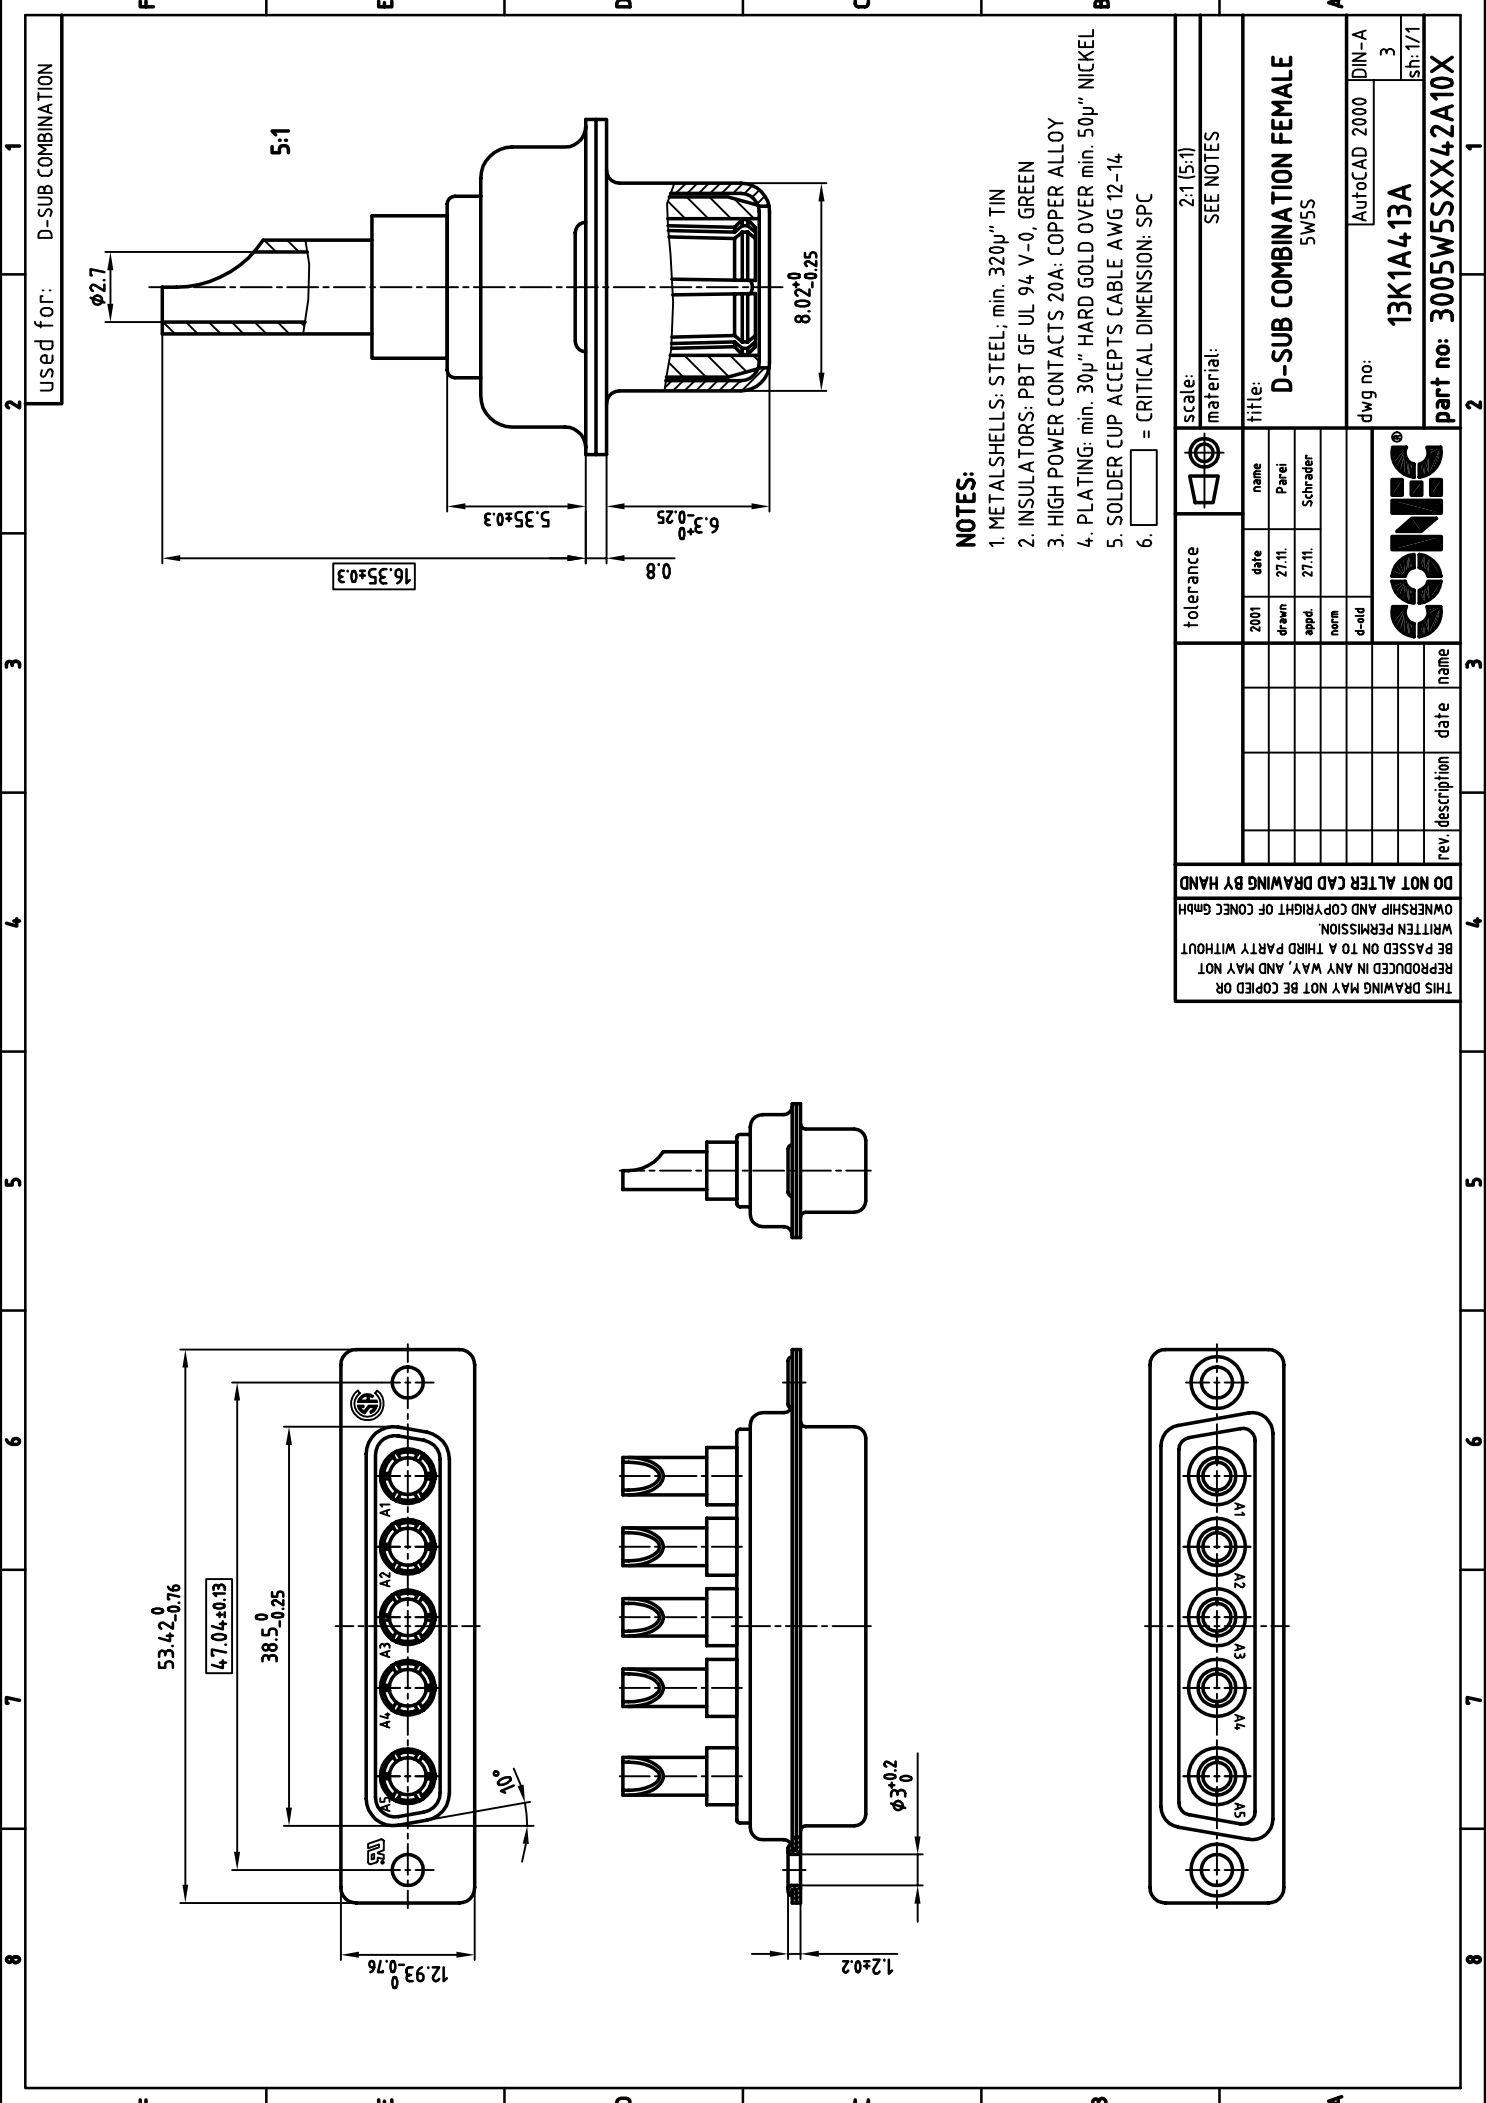

used for: D-SUB COMBINATION

NOTES:

1. METAL SHELLS: STEEL; min. 320µ" TIN
2. INSULATORS: PBT GF UL 94 V-0, GREEN
3. HIGH POWER CONTACTS 20A: COPPER ALLOY
4. PLATING: min. 30µ" HARD GOLD OVER min. 50µ" NICKEL
5. SOLDER CUP ACCEPTS CABLE AWG 12-14
6.   = CRITICAL DIMENSION: SPC

THIS DRAWING MAY NOT BE COPIED OR  
REPRODUCED IN ANY WAY, AND MAY NOT  
BE PASSED ON TO A THIRD PARTY WITHOUT  
WRITTEN PERMISSION.  
OWNERSHIP AND COPYRIGHT OF CONEC GMBH  
DO NOT ALTER CAD DRAWING BY HAND

| tolerance |        | scale:                     |  |
|-----------|--------|----------------------------|--|
|           |        | 2:1 (5:1)                  |  |
| material: |        | SEE NOTES                  |  |
| title:    |        | D-SUB COMBINATION FEMALE   |  |
|           |        | 5W5S                       |  |
| 2001      | date   | name                       |  |
| drawn     | 27.11. | Pareil                     |  |
| appd.     | 27.11. | Schraeder                  |  |
| norm      |        |                            |  |
| d-old     |        |                            |  |
|           |        | dwg no: AutoCAD 2000 DIN-A |  |
|           |        | 13K1A413A                  |  |
|           |        | 3                          |  |
|           |        | sh: 1/1                    |  |
|           |        | part no: 3005W5SXX42A10X   |  |

