



High voltage contacts for cable applications

Identification	Wire gauge (mm ²)	Part No.	
Straight versions	with solder termination	Male contacts Plating: 1.3 µm Au ¹⁾	Female contacts Plating: 1.3 µm Au ¹⁾
	with crimp termination ²⁾		
Right angled versions	with solder termination		

D-Sub







Straight versions
with solder termination

with crimp termination²⁾

Right angled versions
with solder termination

Male contacts

Female contacts

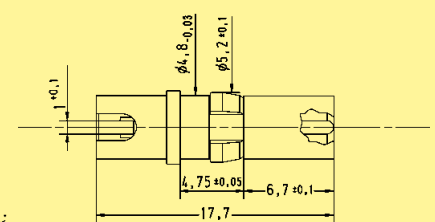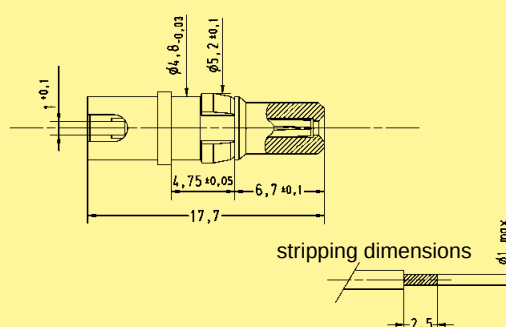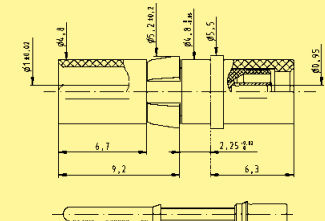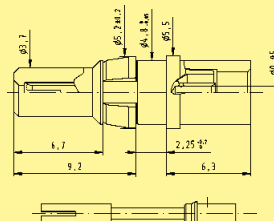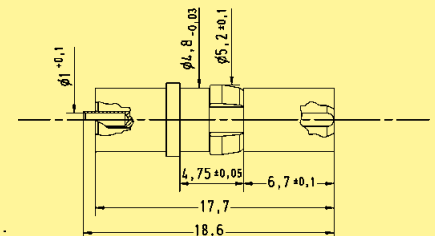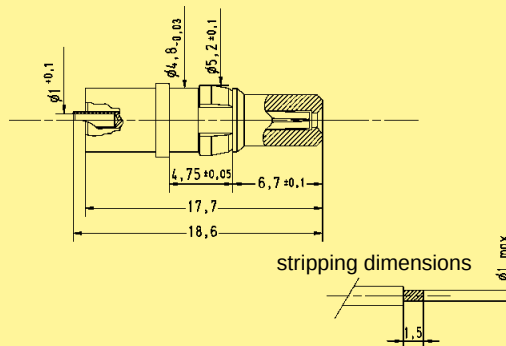

Dimensions in mm

¹⁾ for mating and terminating side

²⁾ Tooling see chapter 20