
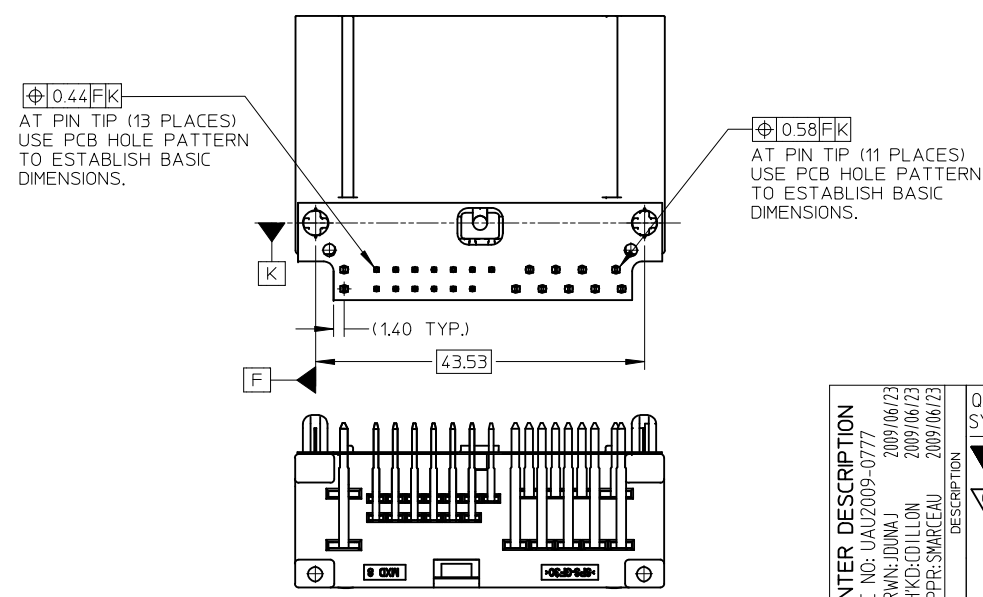
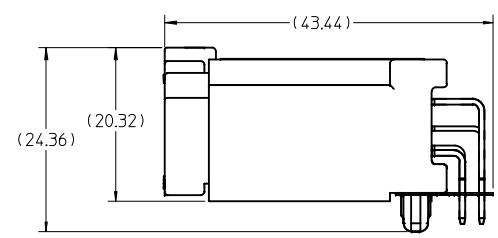
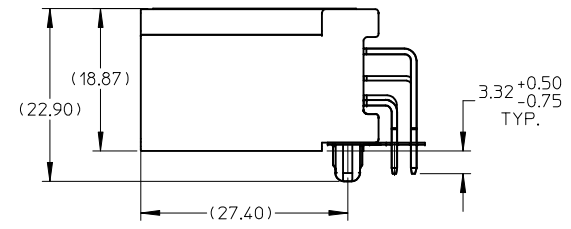
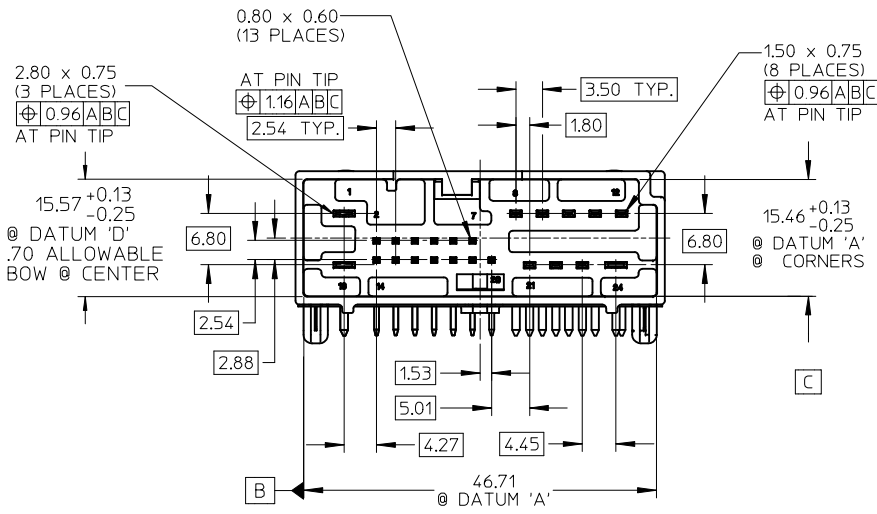
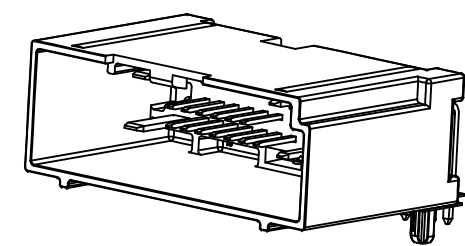



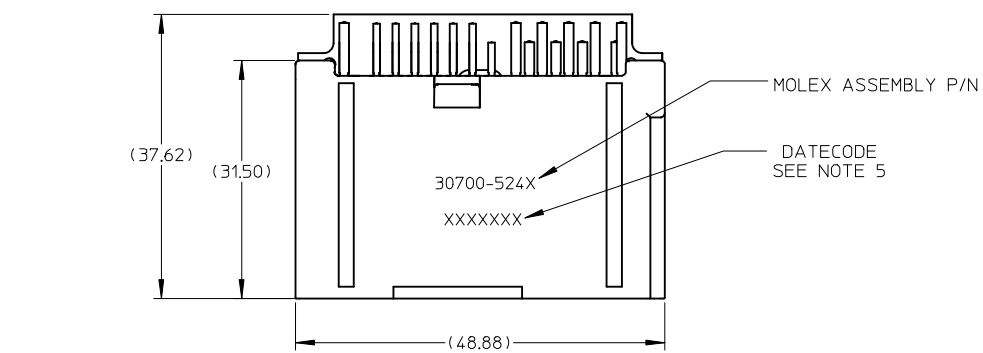


NOTES:


1. MATERIAL: HOUSING: SPS GLASS FILLED, COLOR: SEE CHART.
TERMINAL: COPPER ALLOY C26000.
PIN ALIGNMENT PLATE: MYLAR, COLOR: NATURAL (WHITE).
2. FINISHES: TERMINAL: TIN (Sn) OVERALL,
NICKEL (Ni) UNDERPLATE OVERALL.
3. PACKAGING SPECIFICATION : TRAY: PK-30907-261, TUBE: PK-30907-226.
4. MATES WITH: SERIES 30700, SEE SALES DRAWING SD-30700-124.
5. DATECODE DESCRIPTION:
 - 1ST DIGIT: MACHINE ID# (ALWAYS WILL BE '2')
 - 2ND THROUGH 4TH DIGIT: DAY# OF THE CALENDAR YEAR
(EXAMPLE: FEB. 3RD = '034')
 - 5TH DIGIT: LAST DIGIT OF THE CALENDAR YEAR
(EXAMPLE: 1999 = '9')
 - 6TH THROUGH 7TH DIGIT: HOUR OF THE DAY.
6. RECOMMENDED OPTIONAL SCREW: M2 x 0.89, 6mm IN LENGTH, PAN
COLLAR HEAD, 6 LOBE.
TORQUE: 7 NEWTON CENTIMETERS

ENTER DESCRIPTION EC NO: UAU2009-0777 DRAWN: DUNAJ 2009/06/23 CHKD: COLLON 2009/06/23 APPR: SWARCEAU 2009/06/23			QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
					mm	INCH	DRAWN BY RCARLSON	DATE 01/04/03	TITLE 24 CKT HEADER ASSEMBLY RIGHT ANGLE SALES DRAWING	
				4 PLACES	± ---	± ---	CHECKED BY CKRISHNA	DATE 01/04/24		
				3 PLACES	± ---	± ---	APPROVED BY LGEIB	DATE 01/04/24		
				2 PLACES	± 0.13	± ---	MATERIAL NO. 9999999999			
1 PLACE			± 0.25	± ---	ANGULAR ± 1 °		MOLEX INCORPORATED			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										
REV			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							


PACKAGING		POLARIZATION OPTIONS & COLOR	
ASSEMBLY P/N TRAY PACKED	ASSEMBLY P/N TUBE PACKED	RIGHT ANGLE HEADER ASSEMBLY (POLARIZATION OPTIONS)	HOUSING COLOR
30700-5240	30700-5244	POLARIZATION OPTION 'A'	GRAY
30700-5241	30700-5245	POLARIZATION OPTION 'B'	BLACK
30700-5242	30700-5246	POLARIZATION OPTION 'C'	NATURAL

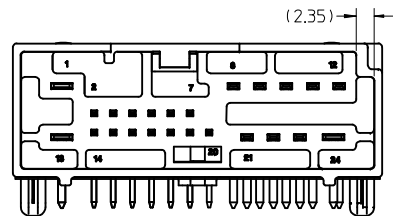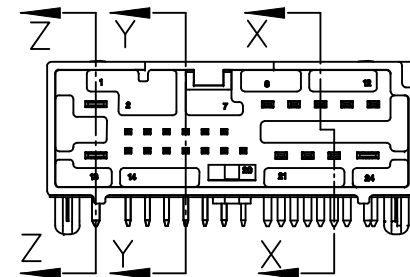


30700-5240/30700-5244
POLARIZATION 'A'

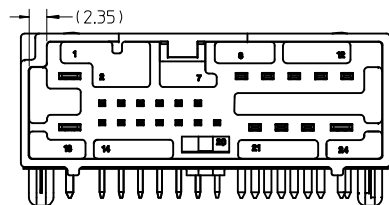


30700-5241/30700-5245
POLARIZATION 'B'

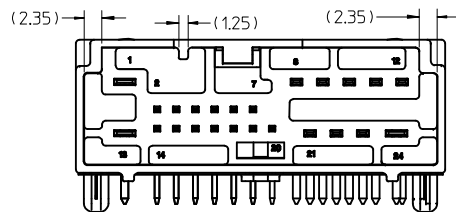


30700-5242/30700-5246
POLARIZATION 'C'

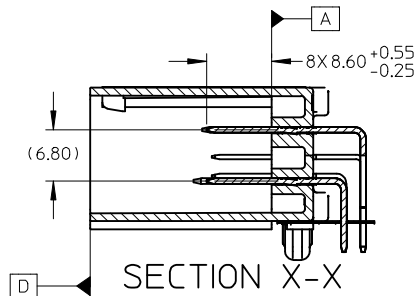


SECTION X-X

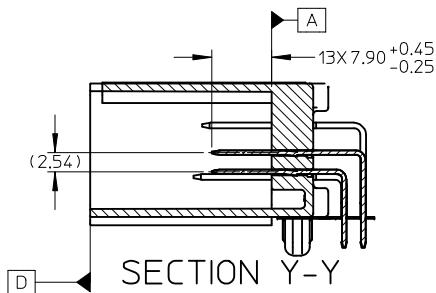

SECTION Y-Y

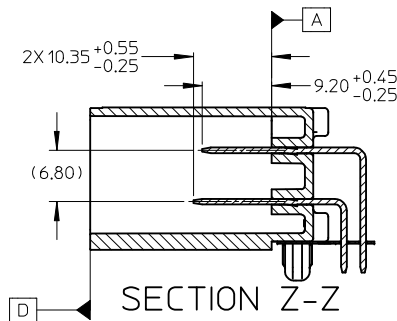

SECTION Z-Z

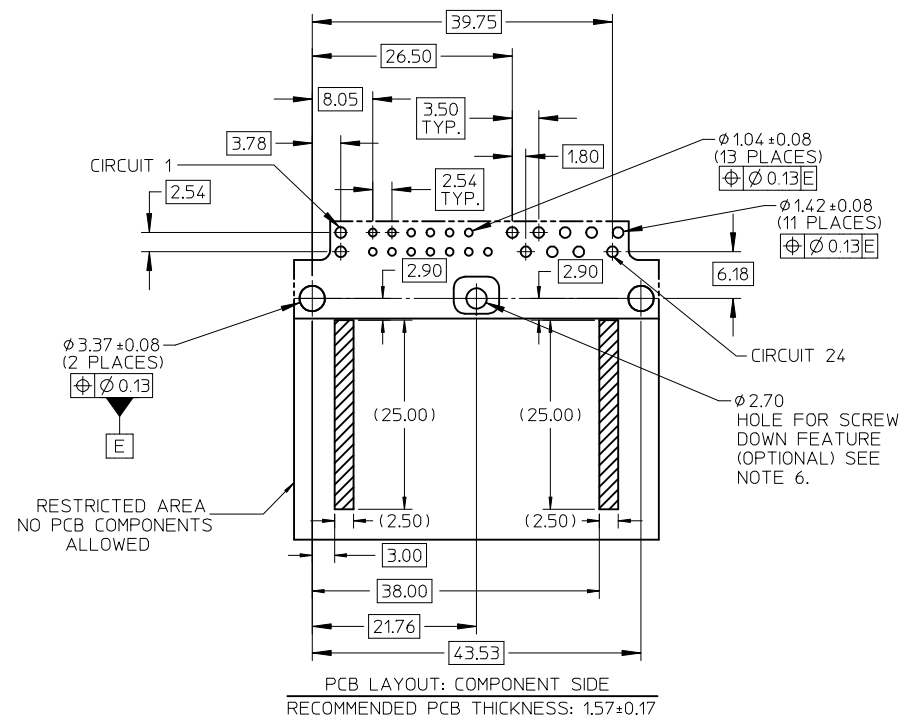

PCB LAYOUT: COMPONENT SIDE
RECOMMENDED PCB THICKNESS: 1.57±0.17

ENTER DESCRIPTION EC NO: UAU2009-0777 DRWN: IDUNAJ 2009/06/23 CHKD: COLLON 2009/06/23 APPR: SWARCEAU 2009/06/23	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
							DRAWN BY RCARLSON		DATE 01/04/03		TITLE 24 CKT HEADER ASSEMBLY RIGHT ANGLE SALES DRAWING
							CHECKED BY CKRI SHNA		DATE 01/04/24		
							APPROVED BY LGEIB		DATE 01/04/24		
							MATERIAL NO. 9999999999		DOCUMENT NO. SD-30700-524		
							SHEET NO. 2 OF 2				
			ANGULAR ± 1 °			MOLEX MOLEX INCORPORATED					
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					