


HONEYWELL PART NUMBER
311SX147-T2
PRODUCT CODE VDS0947

REV	DOCUMENT	CHANGED BY	CHECK
3	0038558	SS 21MAY08	BLR

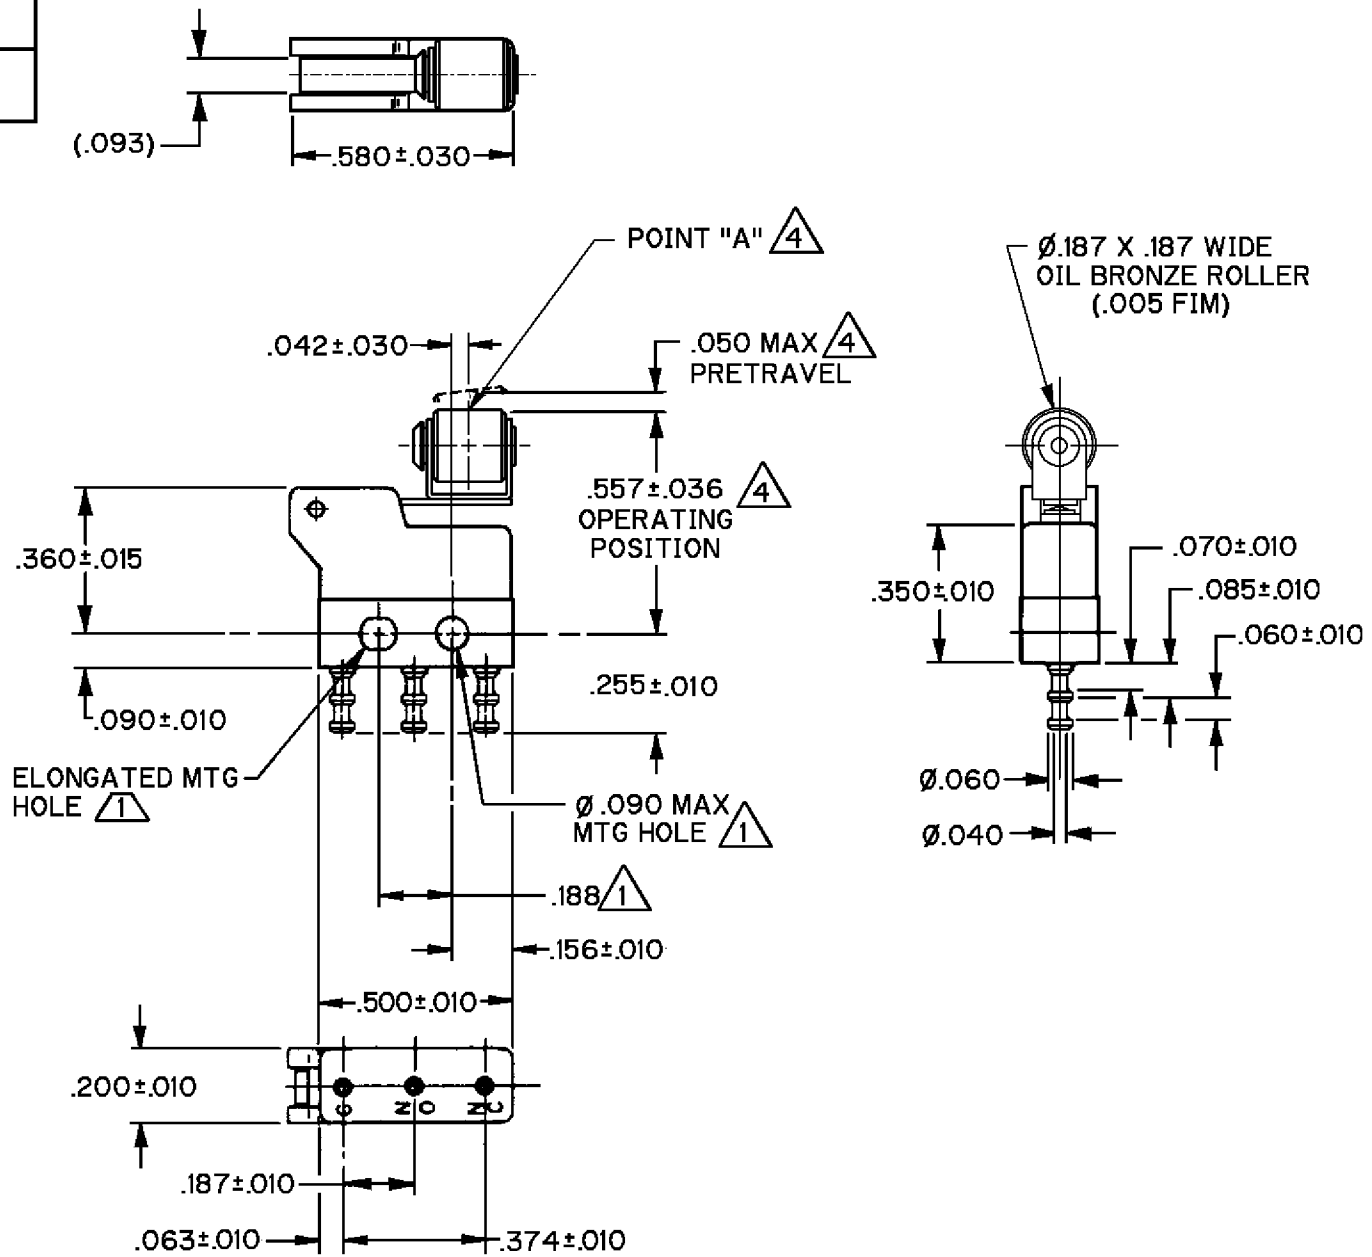

- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø.087 MAX ON .188±.002 CENTERS
 - 2 - TERMINALS ARE PLATED FOR SOLDERING
 - 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
 - 4 CHARACTERISTICS ARE TAKEN AT POINT "A"

RELEASE NO.	201129
REPLACES	X111208-SX

CHARACTERISTICS A	ELECTRICAL DATA				DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ± THIRD ANGLE PROJECTION 	DRAWN	SPK	26FEB08	Honeywell				
OPERATING FORCE — — — 60 GRAM MAX	CONTACT ARRANGEMENT S P D T					CHECK	RJ	26FEB08					
RELEASE FORCE— — — 11 GRAM MIN		28 VOLTS DC RATING		115 VOLTS AC, 60 CPS		0.030 0.015 0.005	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC			
		SEA LEVEL		SEA LEVEL									
DIFFERENTIAL TRAVEL— — .015 MAX	INDUCTIVE	3 AMP	2 AMP	5 AMP									
OVERTRAVEL — — — — .010 MIN	RESISTIVE	5 AMP	4 AMP	5 AMP		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE B	TYPE I	DRAWING NAME 311SX147-T2		REV 3
APPROVALS						RASTER			SCALE	-	WEIGHT: .003 LB MAX	SHEET	1 OF 1
		KEMA, CE	5A 250 V ~ T125 5E4  										
		UL, CSA	5A <u>250</u> VAC   BRAND L4L										