


HONEYWELL
PART NUMBER

311SM1-H4

PRODUCT CODE
TZA1052

REV	DOCUMENT	CHANGED BY	CHECK
3	0038113	PRS 12JUN08	BLR

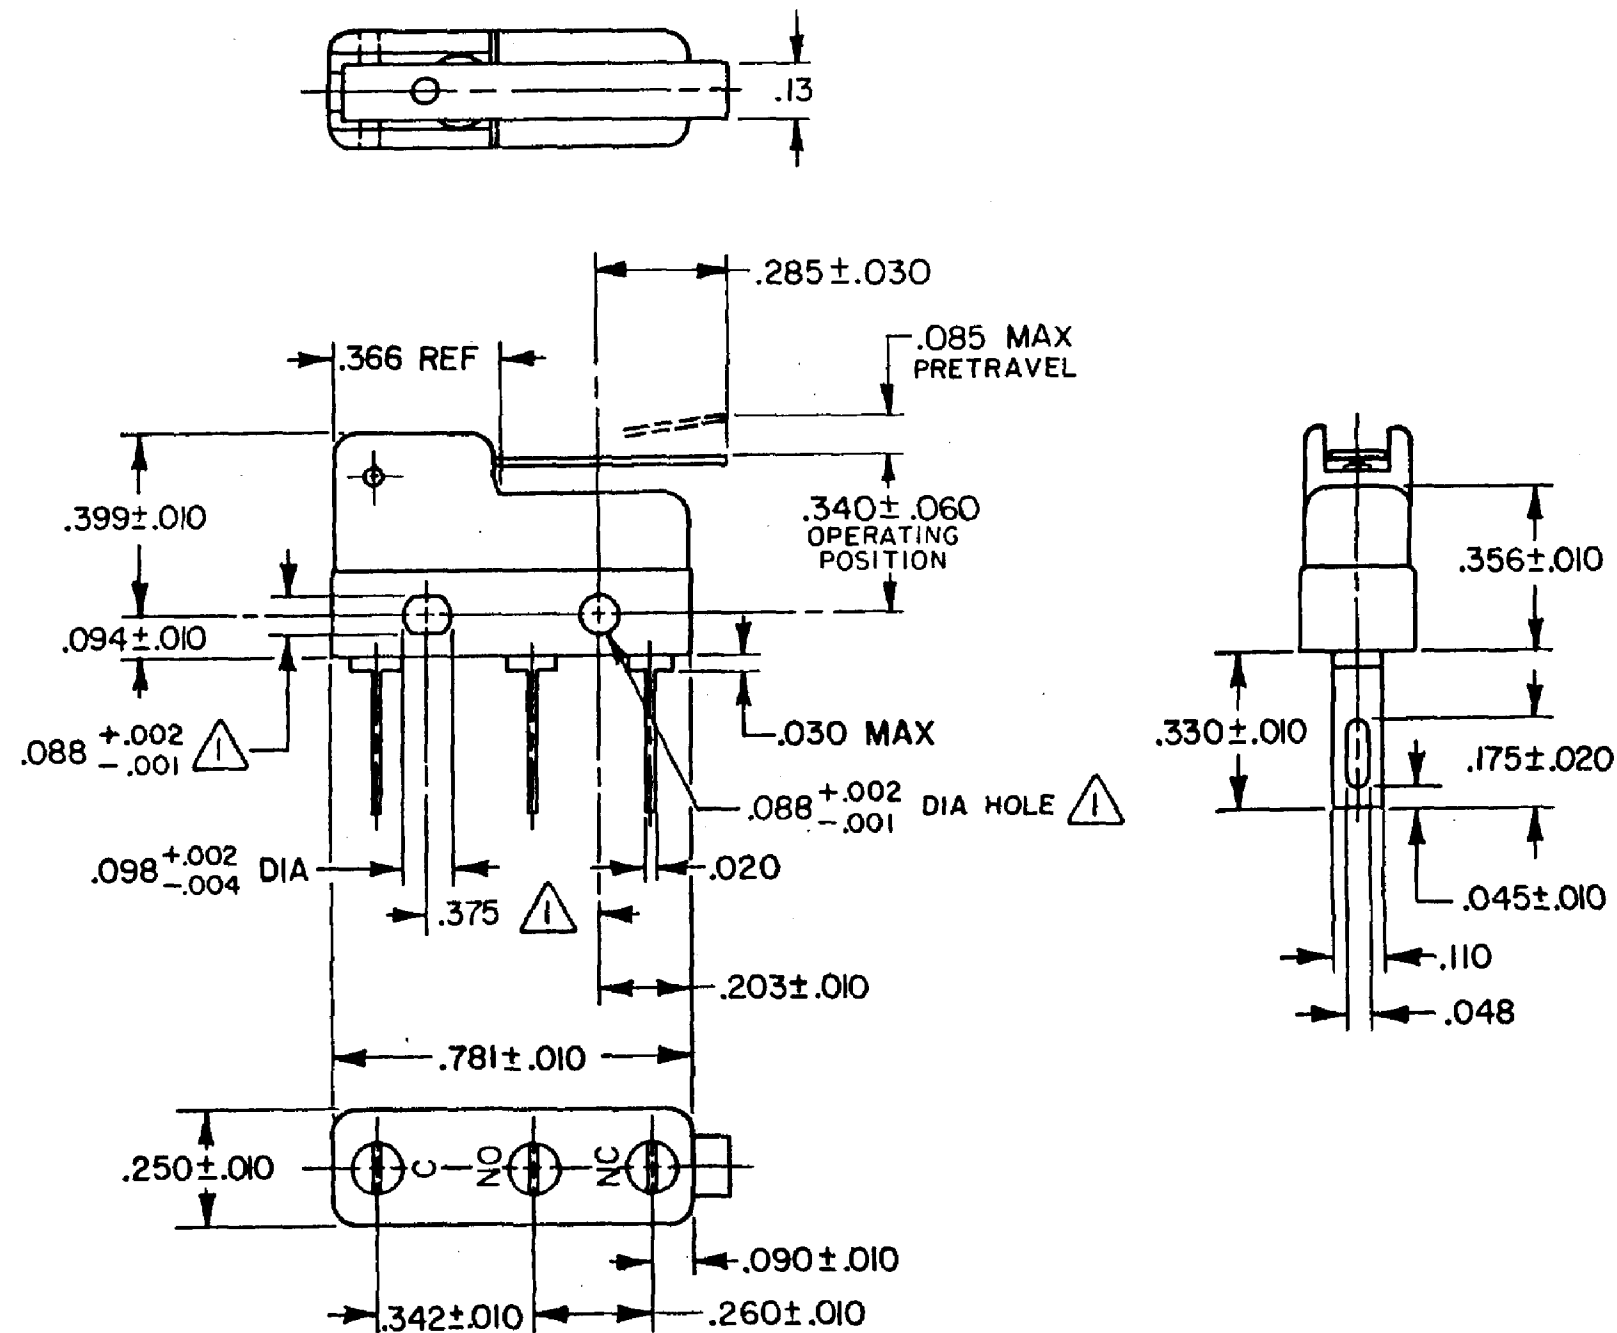

NOTE

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .087 MAX DIA ON .375 ± .002 CENTERS
2- TERMINALS ARE PLATED FOR SOLDERING
3- SWITCH WILL WITHSTAND A TEMPERATURE OF 250°F

RELEASE NO.
PR-12634REPLACES
-

CHARACTERISTICS

OPERATING FORCE -- 40 GRAM MAX

RELEASE FORCE-- 7 GRAM MIN

DIFFERENTIAL TRAVEL-- .019 MAX

OVERTRAVEL-- .020 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

30 VOLTS DC RATING

	SEA LEVEL	50,000 FT
INDUCTIVE	3 AMP	2.5 AMP
RESISTIVE	5 AMP	5 AMP

MAXIMUM INRUSH 24 AMP

APPROVALS	KEMA, CE	5A, 250V ~ T85 1E4	CE
	UL, CSA	5A, 250 VAC	UL

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE	X	±	-
ONE PLACE	.X	±	0.030
TWO PLACE	.XX	±	0.015
THREE PLACE	.XXX	±	0.005
FOUR PLACE	.XXXX	±	-
ANGLES		±	-

THIRD ANGLE PROJECTION



DRAWN

JA

31OCT 07

CHECK

RJ

31OCT 07

THIS DRAWING COVERS A PROPRIETARY ITEM
AND IS THE PROPERTY OF HONEYWELL.
THIS DRAWING IS NOT TO BE COPIED OR USED
WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ANSI Y14.5M-1982
OTHER HONEYWELL ENGINEERING
STANDARDS MAY APPLY

RASTER

Honeywell

TITLE

SWITCH - BASIC

SIZE

B

TYPE

I

DRAWING NAME

311SM1-H4

REV

3

SCALE

-

WEIGHT

SHEET 1 OF 1