
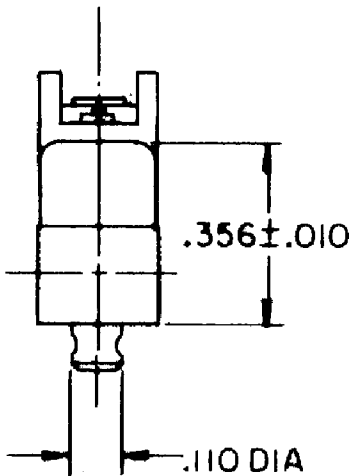
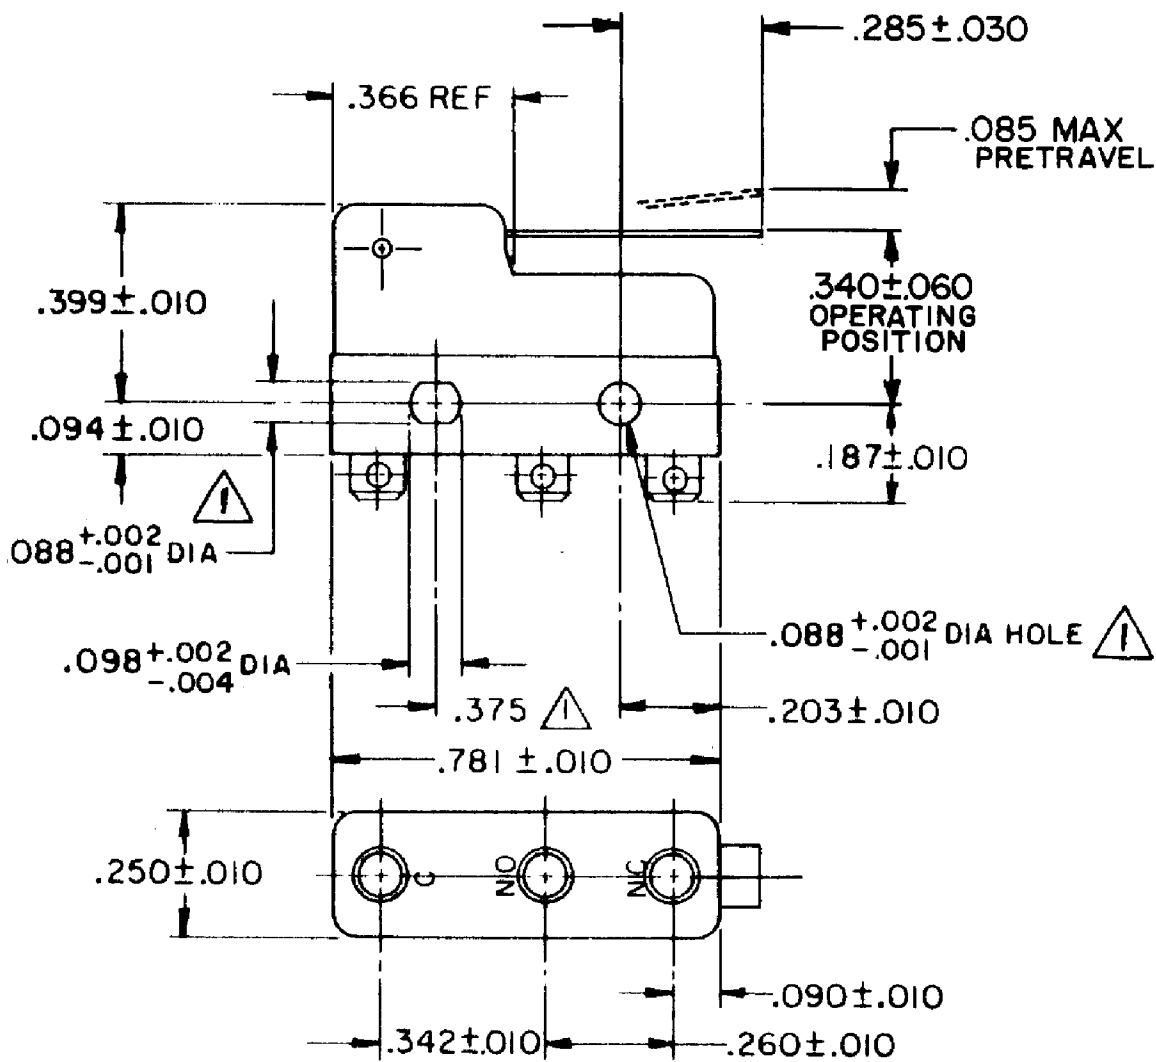


HONEYWELL PART NUMBER
311SM1
PRODUCT CODE TZA0100

REV	DOCUMENT	CHANGED BY	CHECK
4	0038113	PRS 12JUN08	BLR

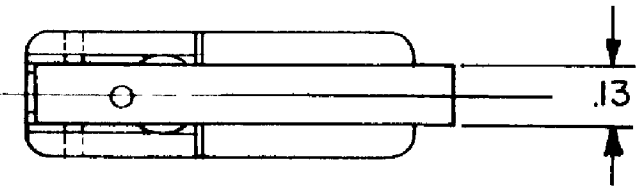

NOTE -
⚠ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375±.002 CENTERS
2- SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
3- TERMINALS ARE PLATED FOR SOLDERING

RELEASE NO.	SR - 12194
REPLACES	-

CHARACTERISTICS	ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± - ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± - ANGLES ± - THIRD ANGLE PROJECTION 	DRAWN	VK	31OCT 07	Honeywell			
OPERATING FORCE — — 40 GRAM MAX	CONTACT ARRANGEMENT SPDT				CHECK	RJ	31OCT 07				
RELEASE FORCE— — — — 7 GRAM MIN	30 VOLTS DC RATING				THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC			
DIFFERENTIAL TRAVEL— — — .019 MAX		SEA LEVEL	50,000 FT								
OVERTRAVEL — — — — — .020 MIN	INDUCTIVE	3 AMP	2.5 AMP		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME	REV
	RESISTIVE	5 AMP	5 AMP					B	I	311SM1	4
	MAXIMUM INRUSH 24 AMP				RASTER			SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1
	APPROVALS	KEMA, CE	5A, 250V ~ T85 1E4  								
		UL, CSA	5A, 250 VAC ~   BRAND L4								