

HONEYWELL PART NUMBER
311SM1017-T
PRODUCT CODE TZA2824

REV	DOCUMENT	CHANGED BY	CHECK
5	0038445	SSK 14APR08	BLR



B

A

A

B

A

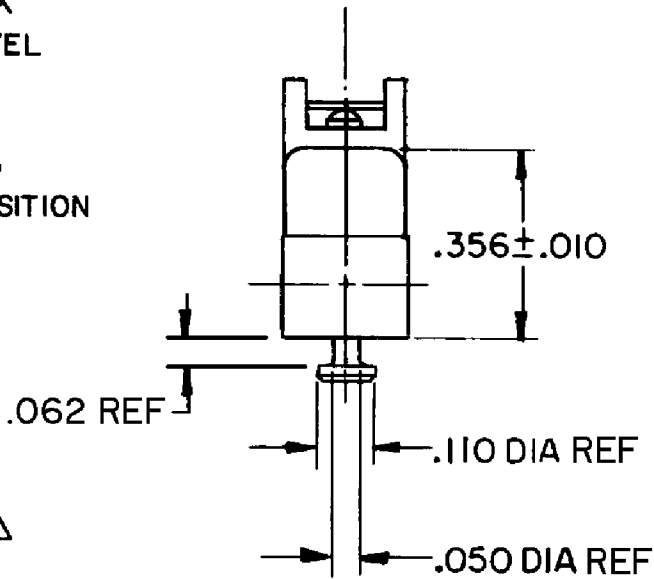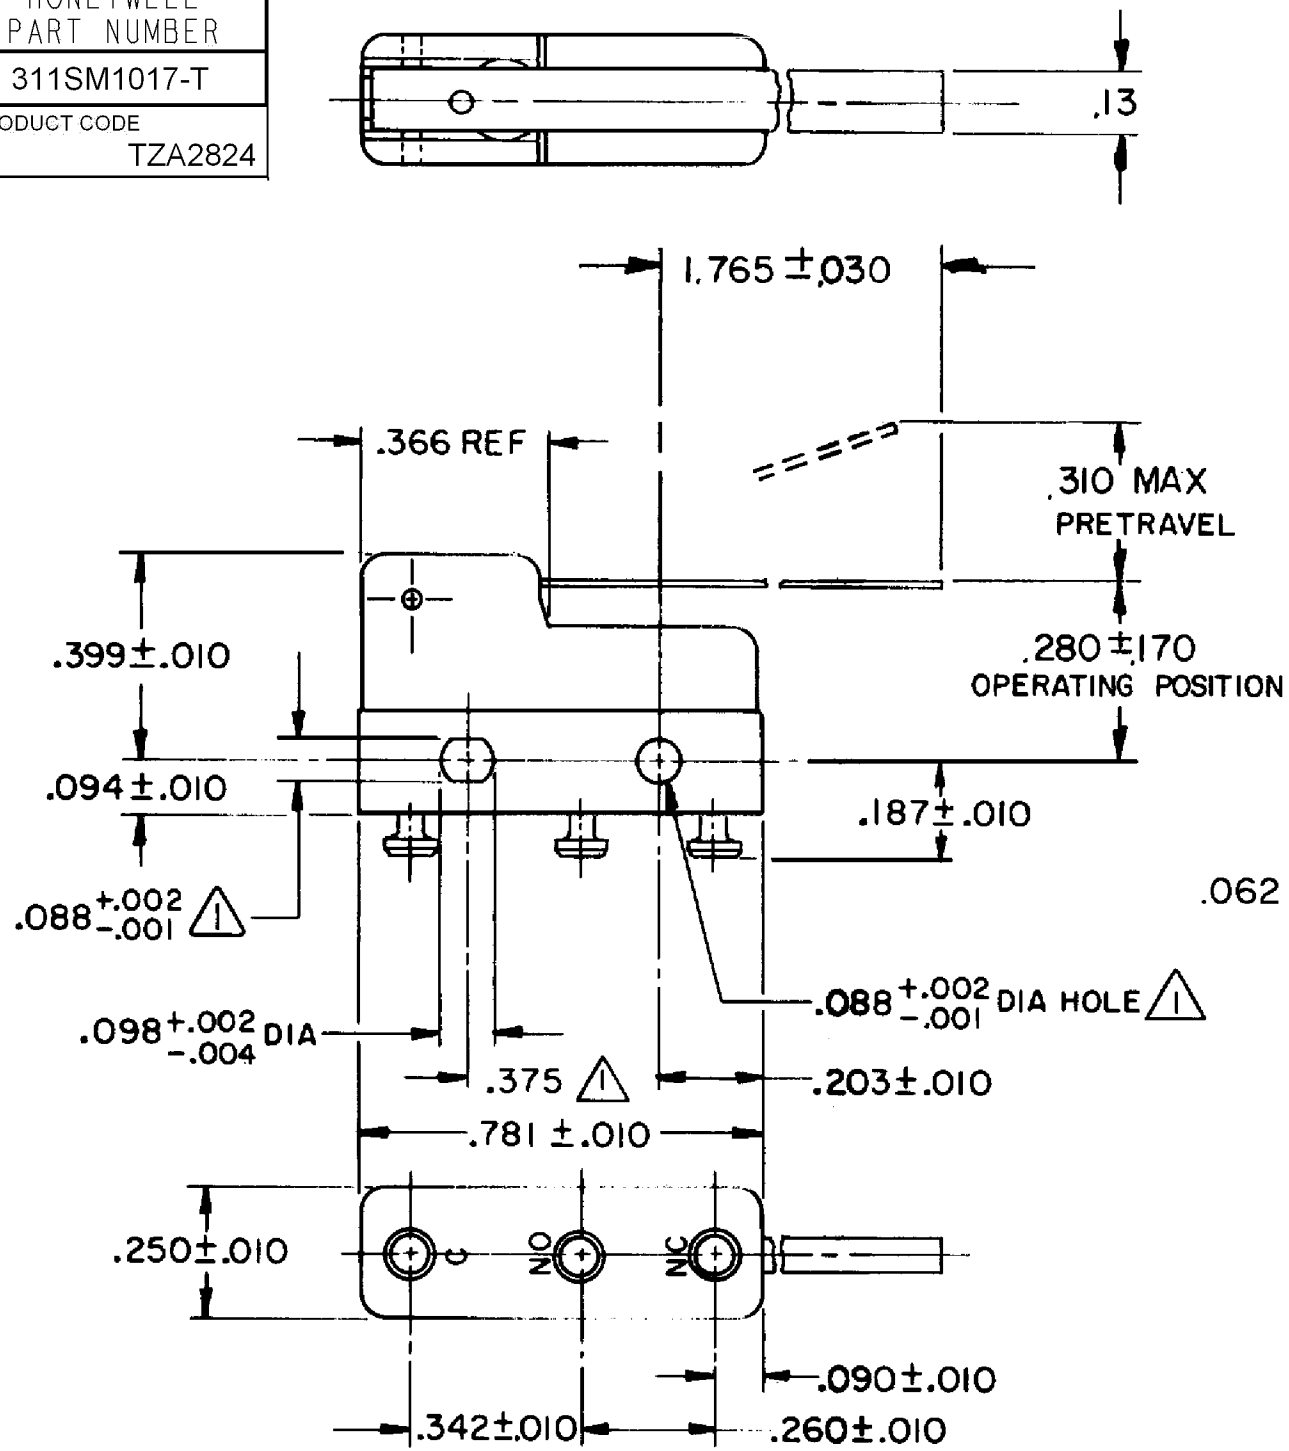

- NOTE -
- 1- MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ±.002 CENTERS
 - 2- SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
 - 3- MATING CONTACT SURFACES ARE OVERLAYS OF 24 K SOLID GOLD AND GOLD ALLOY

RELEASE NO.	PR-5780
REPLACES	X62617-SM

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± ANGLES ±			DRAWN	VK	25 FEB 08		Honeywell				
OPERATING FORCE — — 15 GRAM MAX		CONTACT ARRANGEMENT SPDT						CHECK	RJ	25 FEB 08						
RELEASE FORCE— — — 2 GRAM MIN								THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE SWITCH - BASIC				
DIFFERENTIAL TRAVEL— — — .110 MAX																
OVERTRAVEL — — — — — .057 MIN																
APPROVALS					THIRD ANGLE PROJECTION 			INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SIZE	TYPE	DRAWING NAME		REV
		UL, CSA	0.1A 125 VAC 30 VDC						BRAND	L171	B	I	311SM1017-T		5	
								RASTER				SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1	