


HONEYWELL PART NUMBER
311SM1018-T
PRODUCT CODE TZF1018


REV	DOCUMENT	CHANGED BY	CHECK
3	0038445	SSK 14APR08	BLR

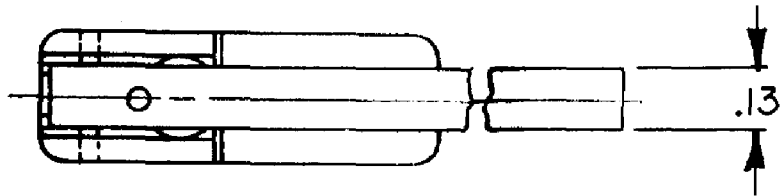

B

A


A

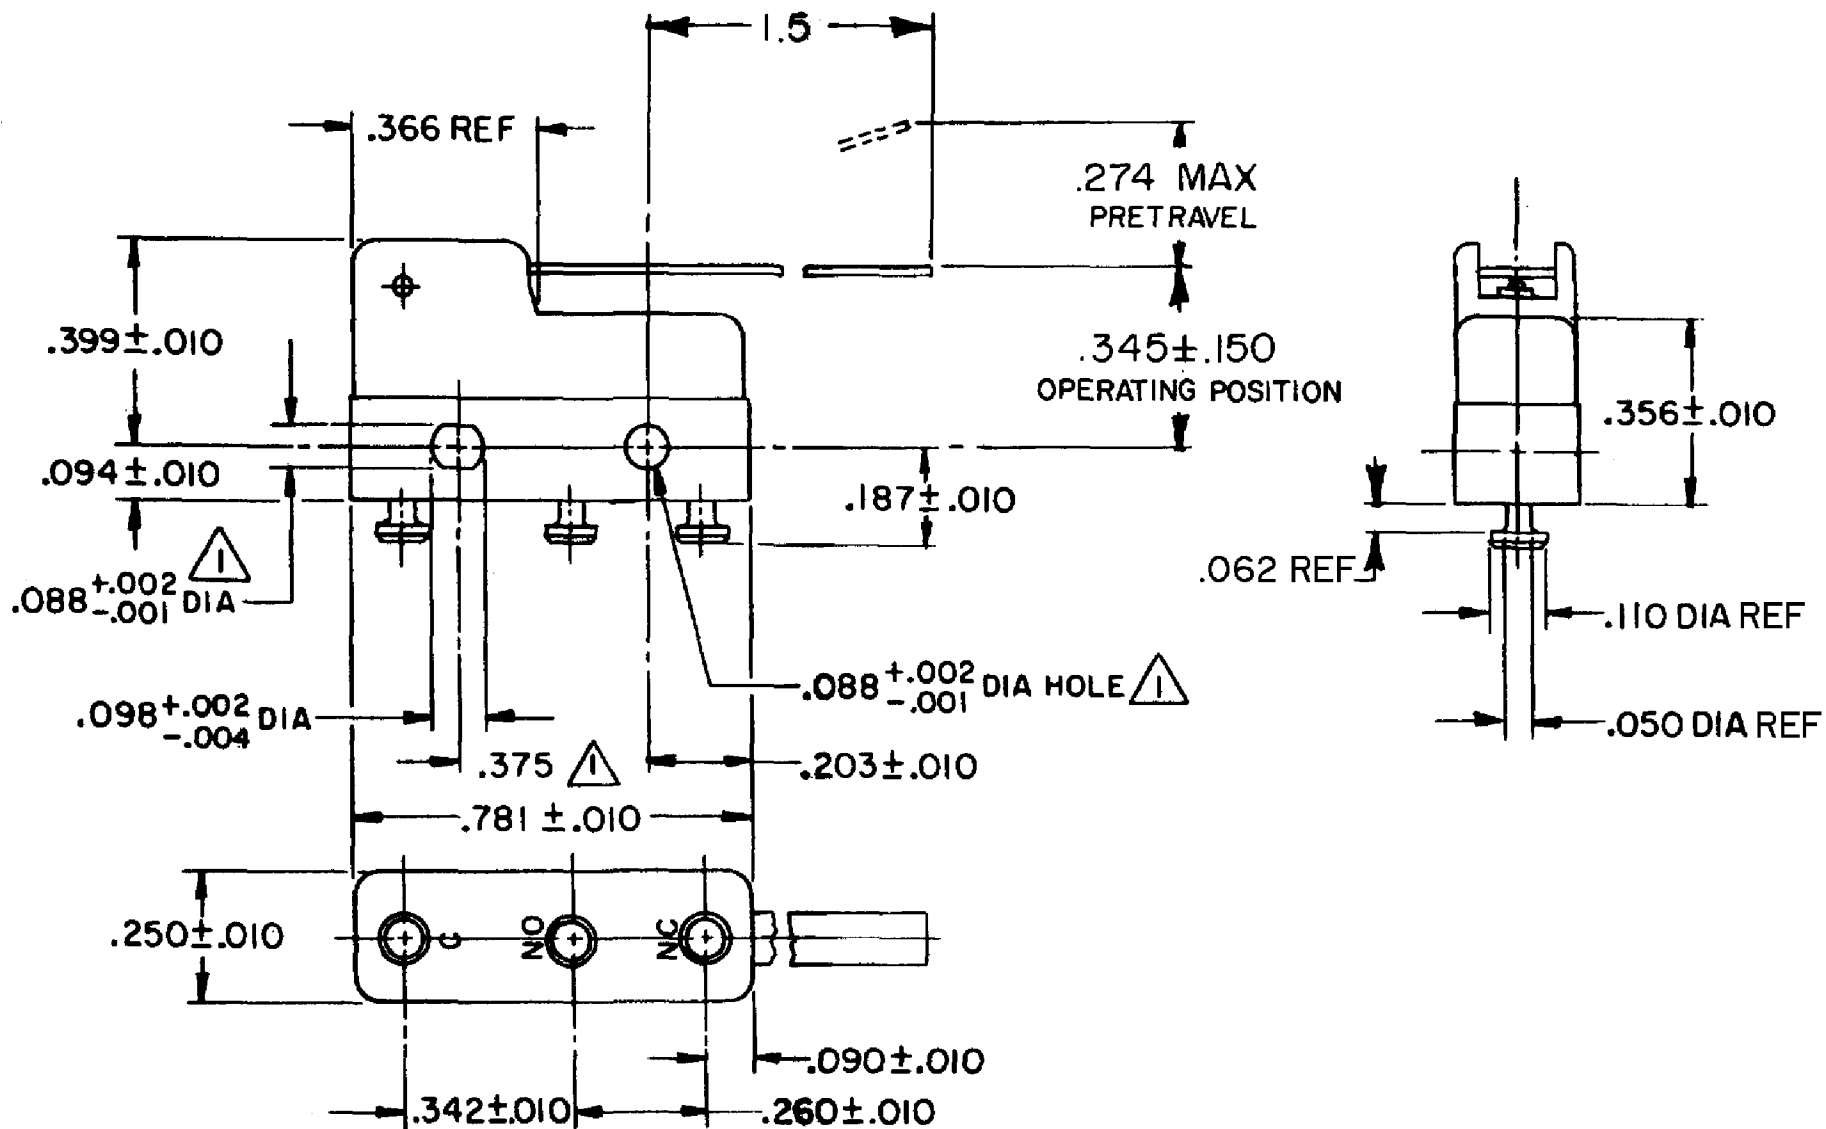

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375±.002 CENTERS
- 2 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
- 3 - MATING CONTACT SURFACES ARE OVERLAYS OF 24K SOLID GOLD AND GOLD ALLOY

RELEASE NO.	PR-13857
REPLACES	X81042- SM

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ±		DRAWN		VK		25 FEB 08		Honeywell			
OPERATING FORCE — — 15 GRAM MAX		CONTACT ARRANGEMENT SPDT				CHECK		RJ		25 FEB 08					
RELEASE FORCE— — — — 2 GRAM MIN				0.030 0.015 0.005		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE					
DIFFERENTIAL TRAVEL— — — .110 MAX						INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SWITCH - BASIC					
OVERTRAVEL — — — — — .057 MIN															
APPROVALS				THIRD ANGLE PROJECTION 						SIZE	TYPE	DRAWING NAME		REV	
		UL, CSA	0.1A 125 VAC 30 VDC									BRAND L171	B	I	311SM1018-T
						RASTER				SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1		