
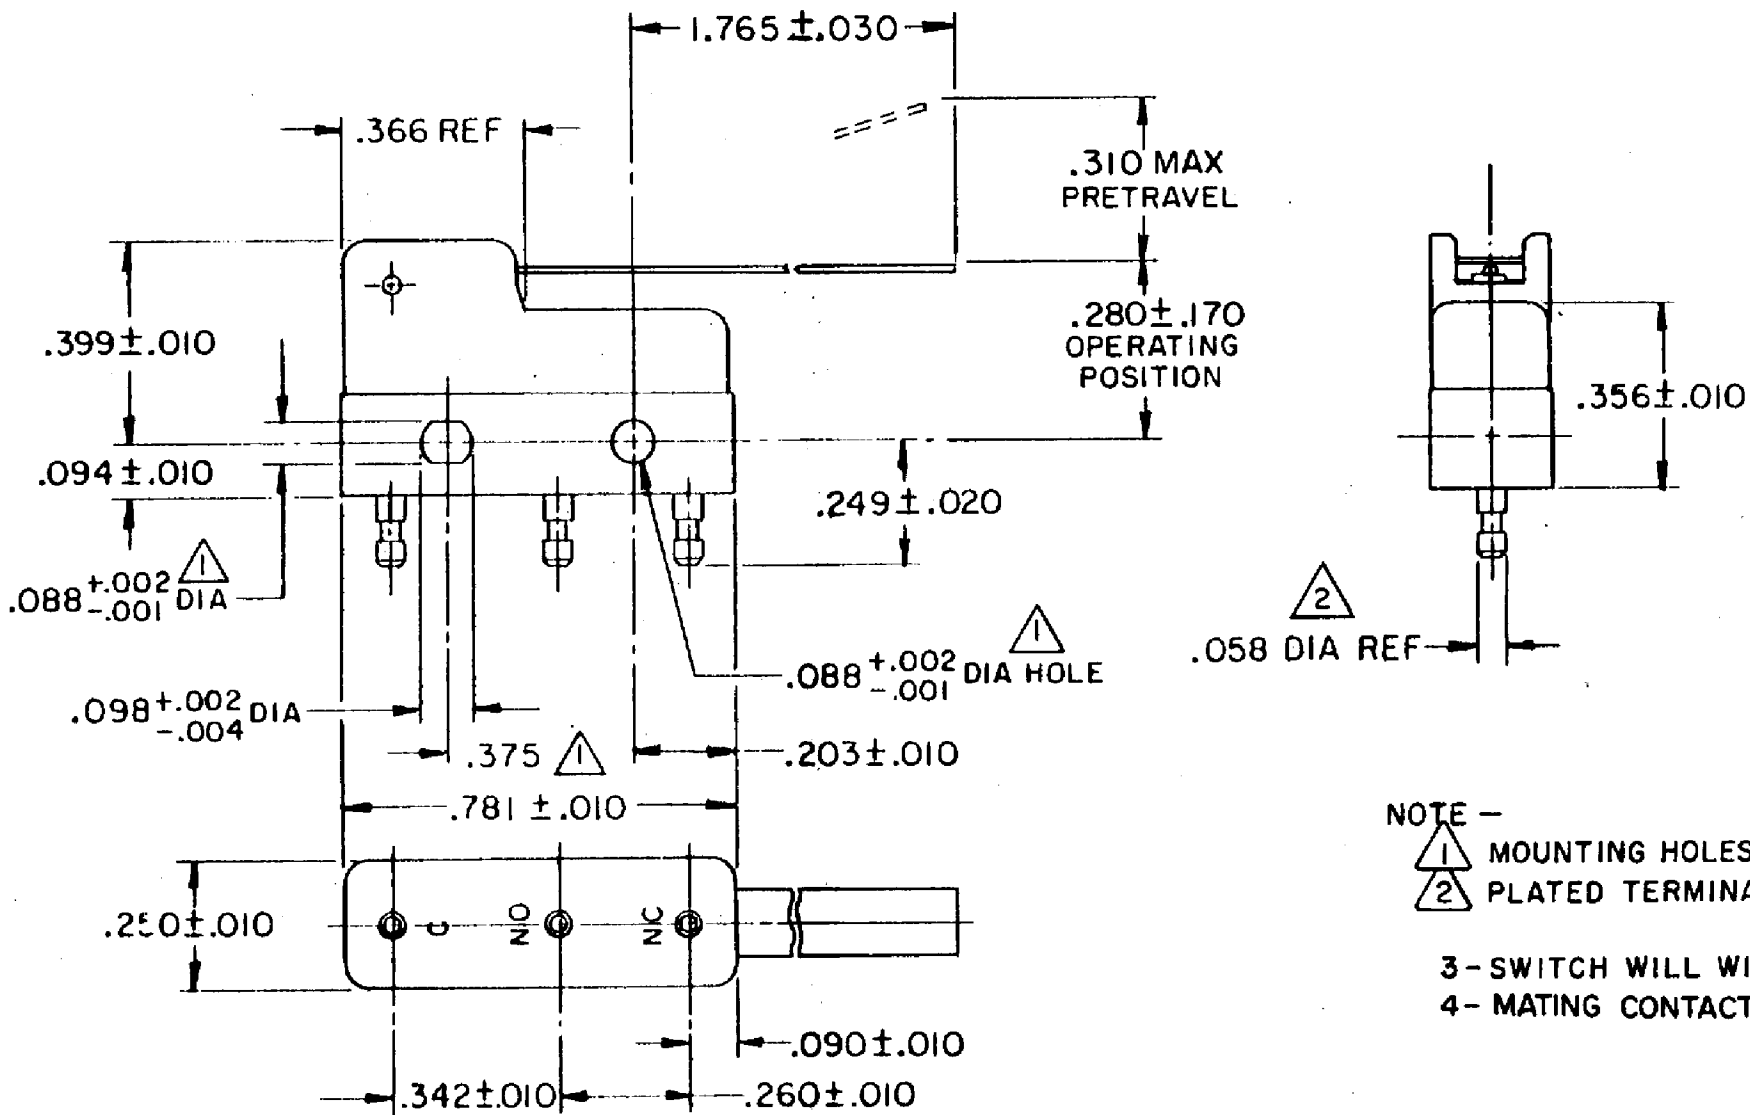


HONEYWELL PART NUMBER
311SM17-H58
PRODUCT CODE TZA1900

REV	DOCUMENT	CHANGED BY	CHECK
7	0038114	KVS 03JUN08	ASD

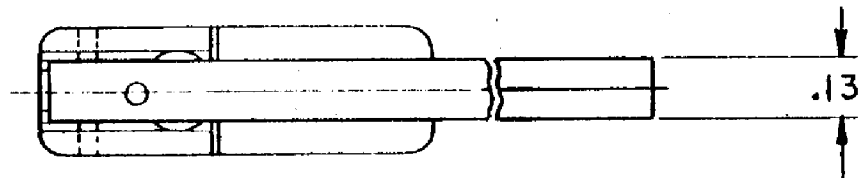

NOTE -
1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375±.002 CENTERS
2 PLATED TERMINALS WILL ACCEPT "AMP INC".058 DIA PIN RECEPTACLES.
3- SWITCH WILL WITHSTAND TEMPERATURE OF 250° F
4- MATING CONTACT SURFACES ARE 24K SOLID GOLD OVERLAY

RELEASE NO. PR - 224
REPLACES -

CHARACTERISTICS
OPERATING FORCE - - 15 GRAM MAX
RELEASE FORCE - - - - 2 GRAM MIN
DIFFERENTIAL TRAVEL - - - .110 MAX
OVERTRAVEL - - - - - .057 MIN

ELECTRICAL DATA			
CONTACT ARRANGEMENT SPDT			
30 VOLTS DC RATING			
	SEA LEVEL	50,000 FT	
INDUCTIVE	1/2 AMP	1/2 AMP	
RESISTIVE	1 AMP	1 AMP	
MAXIMUM INRUSH 2 AMP			
APPROVALS	KEMA, CE	1A, 250V ~ T85 1E4	CE
	UL, CSA	1A, 125 VAC	UL
			BRAND L22

DESIGN UNITS: INCH			
TOLERANCES UNLESS NOTED:			
NO PLACE	X	±	-
ONE PLACE	.X	±	0.030
TWO PLACE	.XX	±	0.015
THREE PLACE	.XXX	±	0.005
FOUR PLACE	.XXXX	±	-
ANGLES		±	-
THIRD ANGLE PROJECTION			

DRAWN	VK	02 NOV 07
CHECK	RJ	02 NOV 07
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell				
TITLE SWITCH - BASIC				
SIZE B	TYPE I	DRAWING NAME 311SM17-H58		REV 7
SCALE -	WEIGHT .006 LB MAX		SHEET 1 OF 1	