


HONEYWELL
PART NUMBER

311SM1721-H4

PRODUCT CODE

TZA2879

REV	DOCUMENT	CHANGED BY	CHECK
3	0038445	SSK 15APR08	BLR

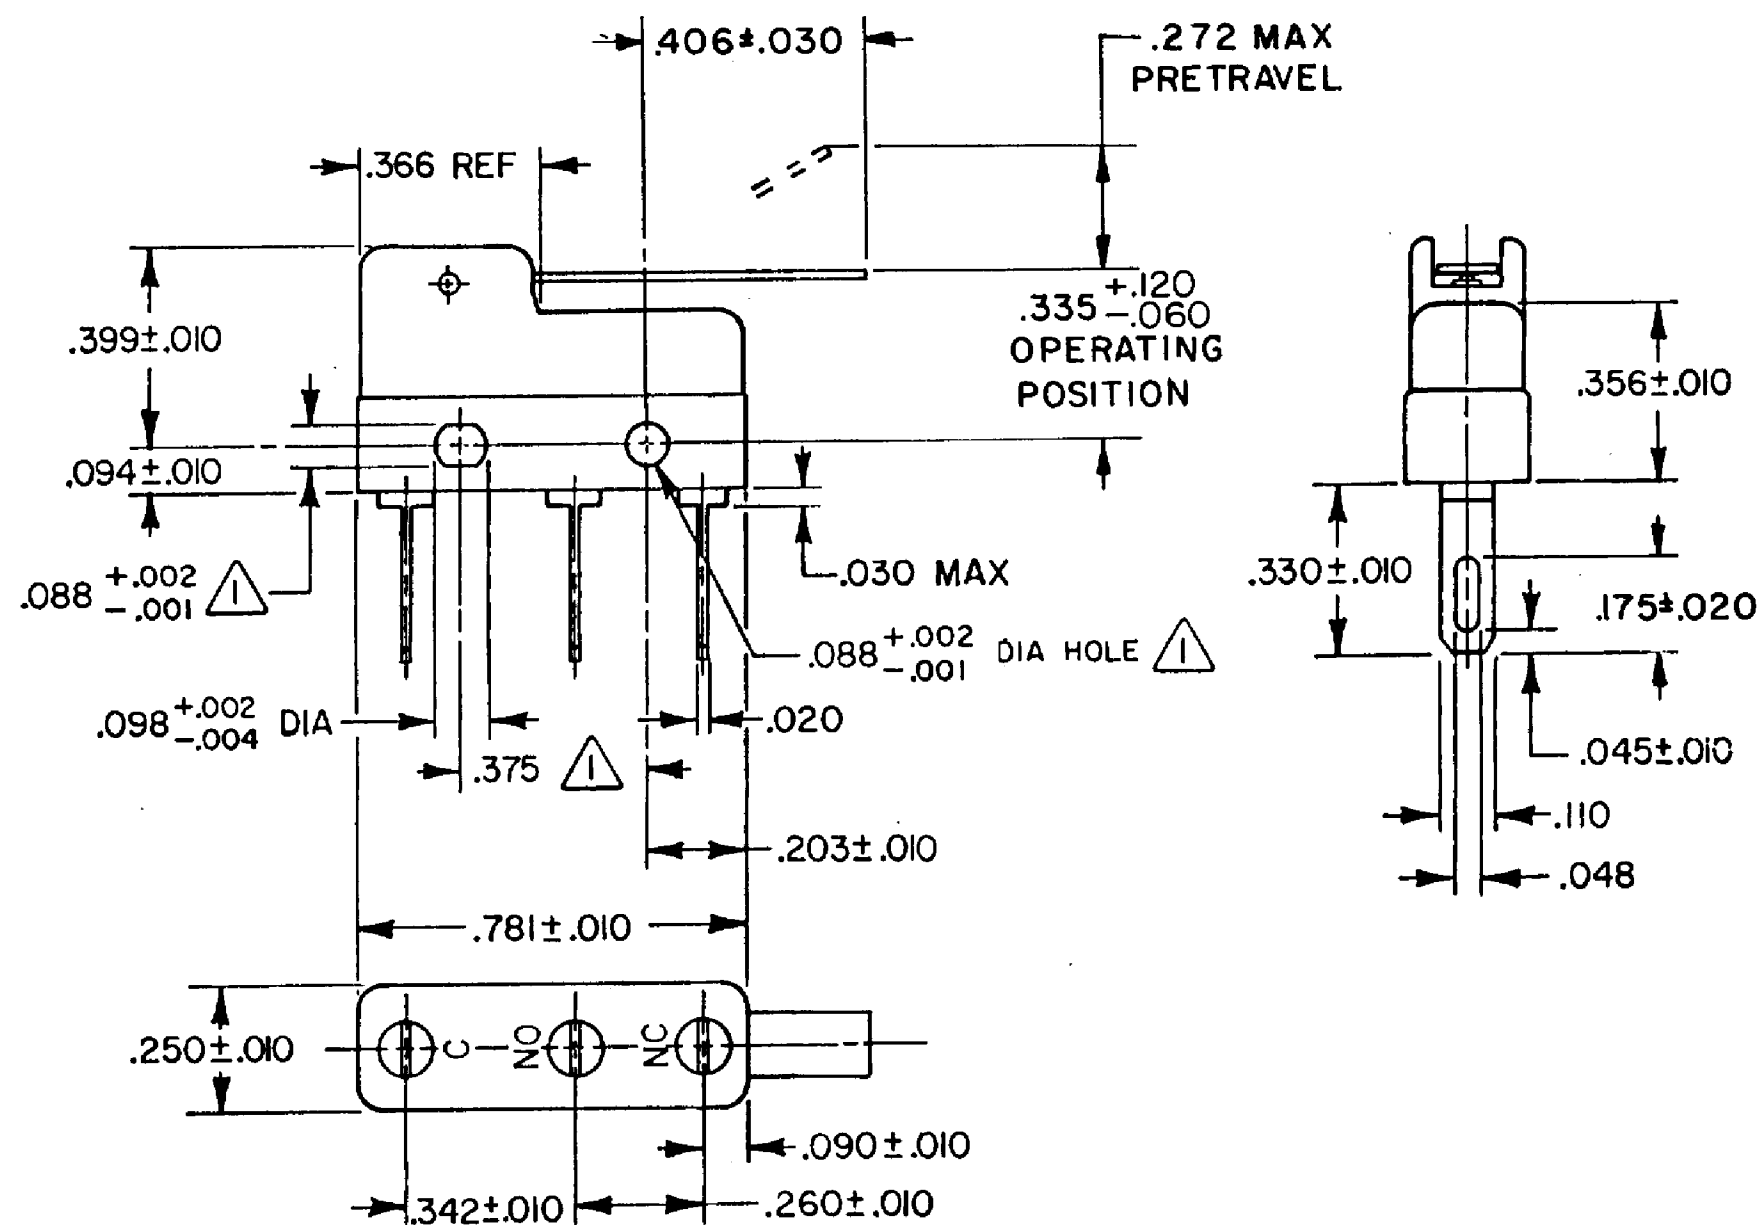

NOTE

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON $.375 \pm .002$ CENTERS
- 2- TERMINALS ARE PLATED FOR SOLDERING
- 3- SWITCH WILL WITHSTAND A TEMPERATURE OF 250°F
- 4- MATING CONTACT SURFACES ARE OVERLAYS OF 24K SOLID GOLD AND GOLD ALLOY

RELEASE NO.
PR-8877REPLACES
X70100-SM

CHARACTERISTICS

OPERATING FORCE -- 9 GRAM MAX

RELEASE FORCE-- 1 GRAM MIN

DIFFERENTIAL TRAVEL-- .029 MAX

OVERTRAVEL-- .060 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

APPROVALS

UL, CSA

0.1A 125 VAC 30 VDC

UL

SP

BRAND

L171

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE	X	±
ONE PLACE	.X	±
TWO PLACE	.XX	±
THREE PLACE	.XXX	±
FOUR PLACE	.XXXX	±
ANGLES		±

0.030
0.015
0.005

THIRD ANGLE PROJECTION



DRAWN

VK

26FEB 08

CHECK

RJ

26FEB 08

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ANSI Y14.5M-1982
OTHER HONEYWELL ENGINEERING
STANDARDS MAY APPLY

RASTER

Honeywell

TITLE

SWITCH - BASIC

SIZE

B

TYPE

I

DRAWING NAME

311SM1721-H4

REV

3

SCALE

-

WEIGHT .006 LB MAX

SHEET 1 OF 1