




HONEYWELL
PART NUMBER

311SM2-T

PRODUCT CODE

TZA1150

REV	DOCUMENT	CHANGED BY	CHECK
7	0055407	KNR 18AUG09	CMH

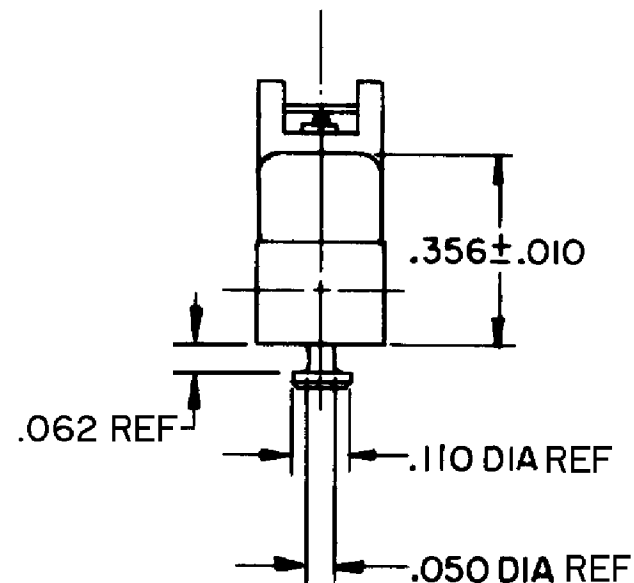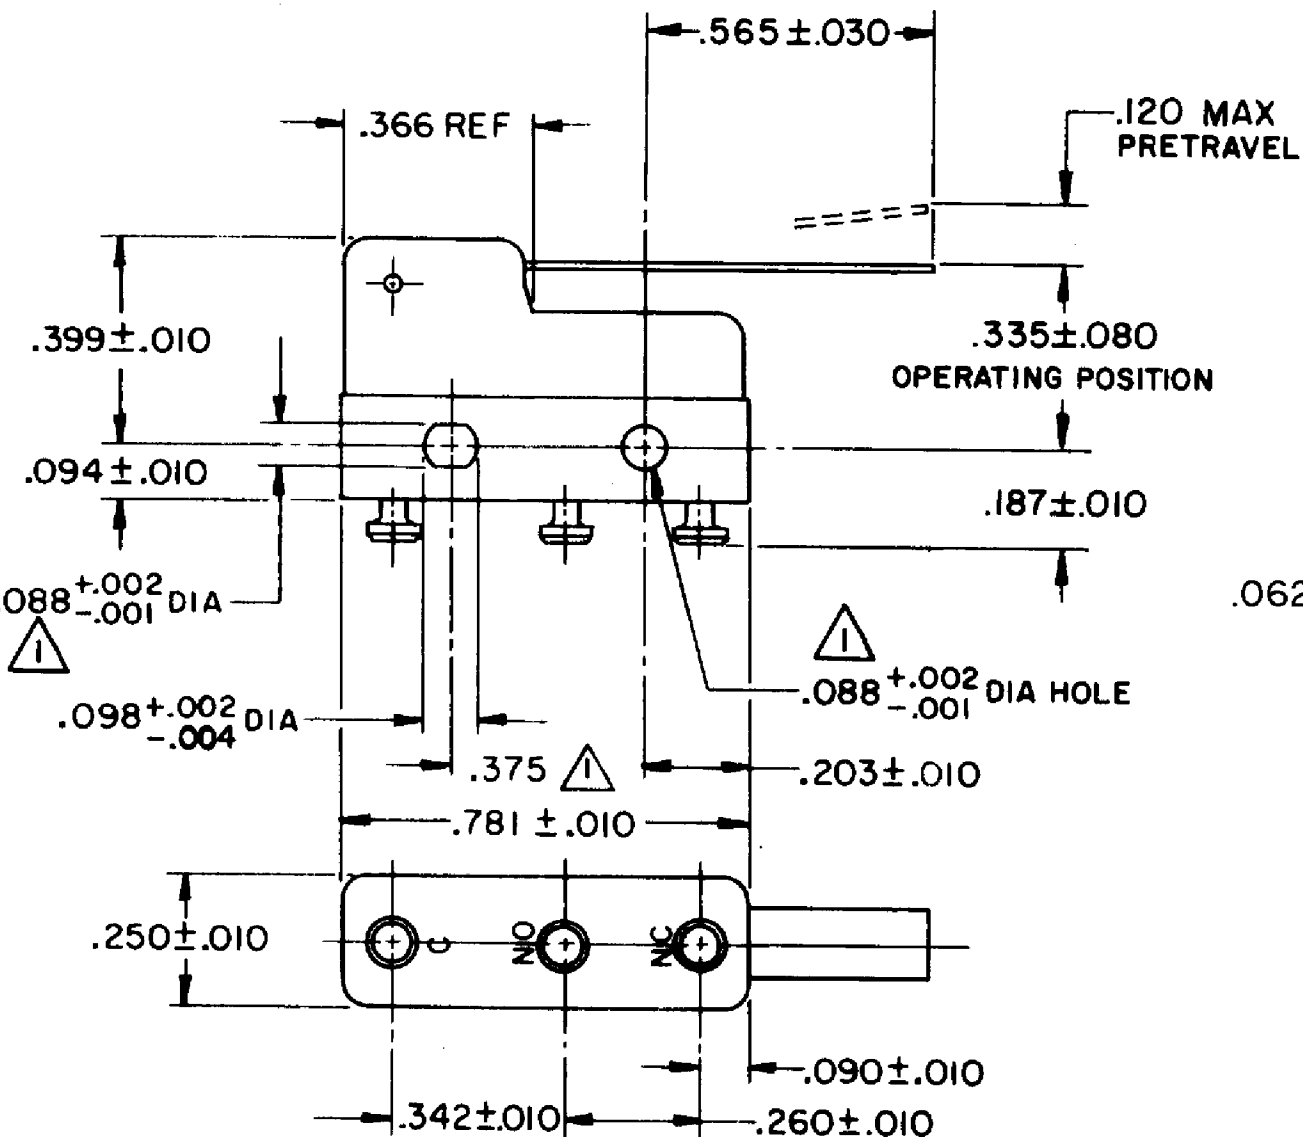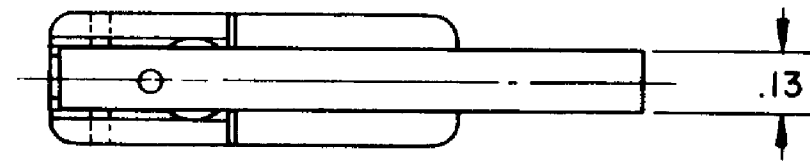

NOTE -

- ⚠ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375±.002 CENTERS
2- SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
3- TERMINALS ARE PLATED FOR SOLDERING

RELEASE NO. SR-11750

REPLACES

CHARACTERISTICS

OPERATING FORCE -- 30 GRAM MAX

RELEASE FORCE-- 5 GRAM MIN

DIFFERENTIAL TRAVEL-- .027 MAX

OVERTRAVEL-- .026 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

30 VOLTS DC RATING

	SEA LEVEL	50,000 FT
INDUCTIVE	3 AMP	2.5 AMP
RESISTIVE	5 AMP	5 AMP

MAXIMUM INRUSH 24 AMP

APPROVALS	KEMA, CE	5A, 250V ~ T85 1E4	CE
	UL, CSA	5A, 250 VAC ~	BRAND L4
	UL	4A, 24VAC RES	BRAND FIG 327

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE	X	±
ONE PLACE	.X	±
TWO PLACE	.XX	±
THREE PLACE	.XXX	±
FOUR PLACE	.XXXX	±
ANGLES		±

THIRD ANGLE PROJECTION



DRAWN	VK	20FEB 08
CHECK	RJ	20FEB 08

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ANSI Y14.5M-1982
OTHER HONEYWELL ENGINEERING
STANDARDS MAY APPLY

RASTER

Honeywell

TITLE

SWITCH - BASIC

SIZE	TYPE	DRAWING NAME	REV
B	I	311SM2-T	7
SCALE	NONE	WEIGHT .006 LB MAX	SHEET 1 OF 1