


HONEYWELL PART NUMBER
311SM2721-T2
PRODUCT CODE TZA2616


REV	DOCUMENT	CHANGED BY	CHECK
4	0038445	SSK 15APR08	BLR

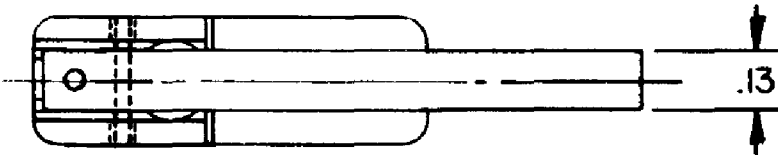

B

A

A

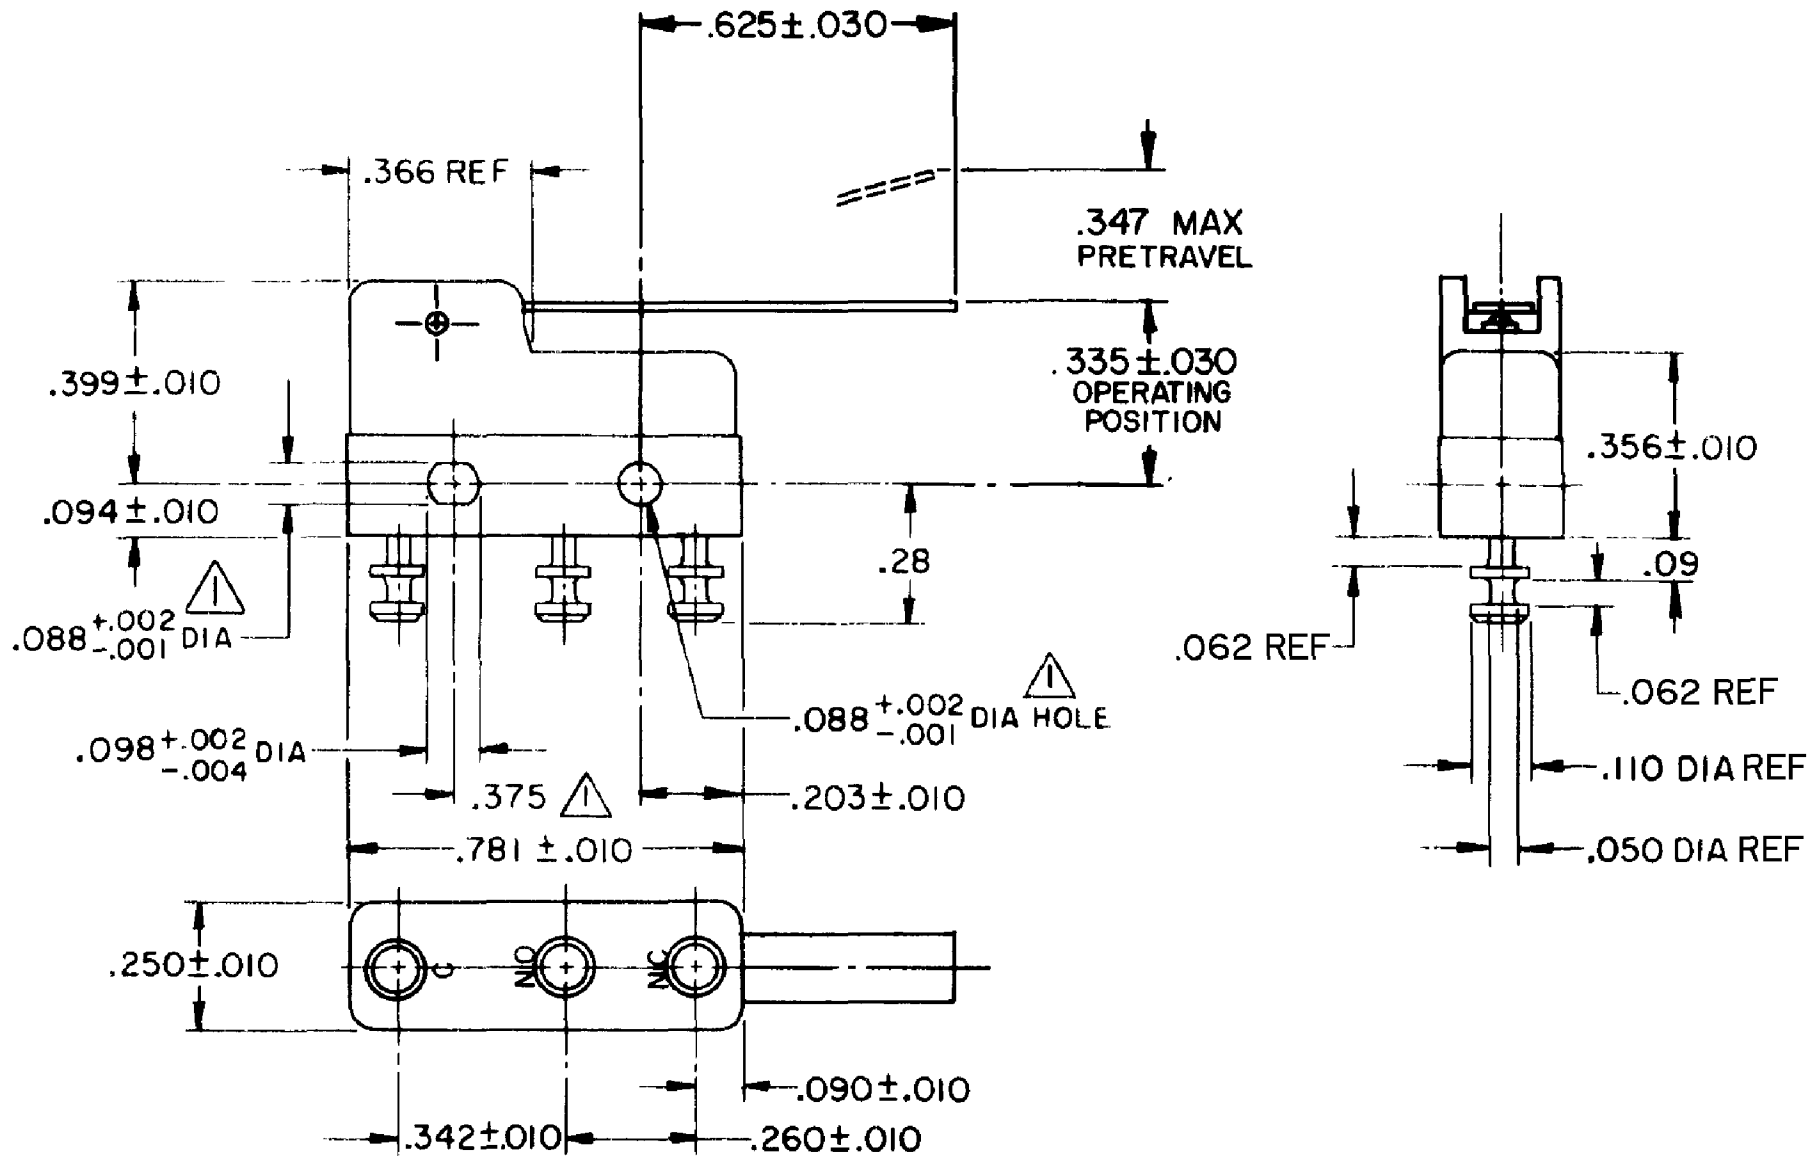

- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375±.002 CENTERS
 - 2 SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
 - 3 TERMINALS ARE PLATED FOR SOLDERING

RELEASE NO.	PR-4727
REPLACES	X49343-SM

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ± 0.030 0.015 0.005		DRAWN	VK	26FEB 08	Honeywell				
OPERATING FORCE — — 7 GRAM MAX		CONTACT ARRANGEMENT SPDT					CHECK	RJ	26FEB 08					
RELEASE FORCE— — — — 1 GRAM MIN		30 VOLTS DC RATING			THIRD ANGLE PROJECTION 		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC				
DIFFERENTIAL TRAVEL— — — .020 MAX														
OVERTRAVEL — — — — — .051 MIN		INDUCTIVE					INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME		REV
		RESISTIVE					RASTER			B	I	311SM2721-T2		4
		MAXIMUM INRUSH 24 AMP								SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1	
		APPROVALS												
		UL, CSA												
		4A, 250 VAC												
		BRAND L119												