
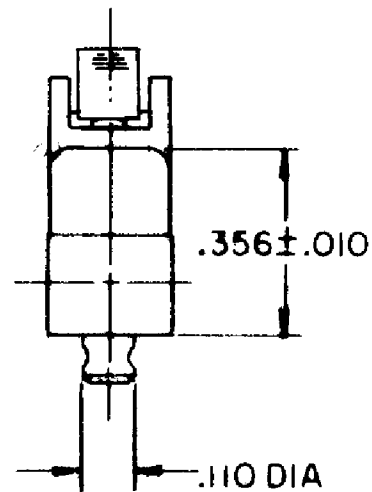
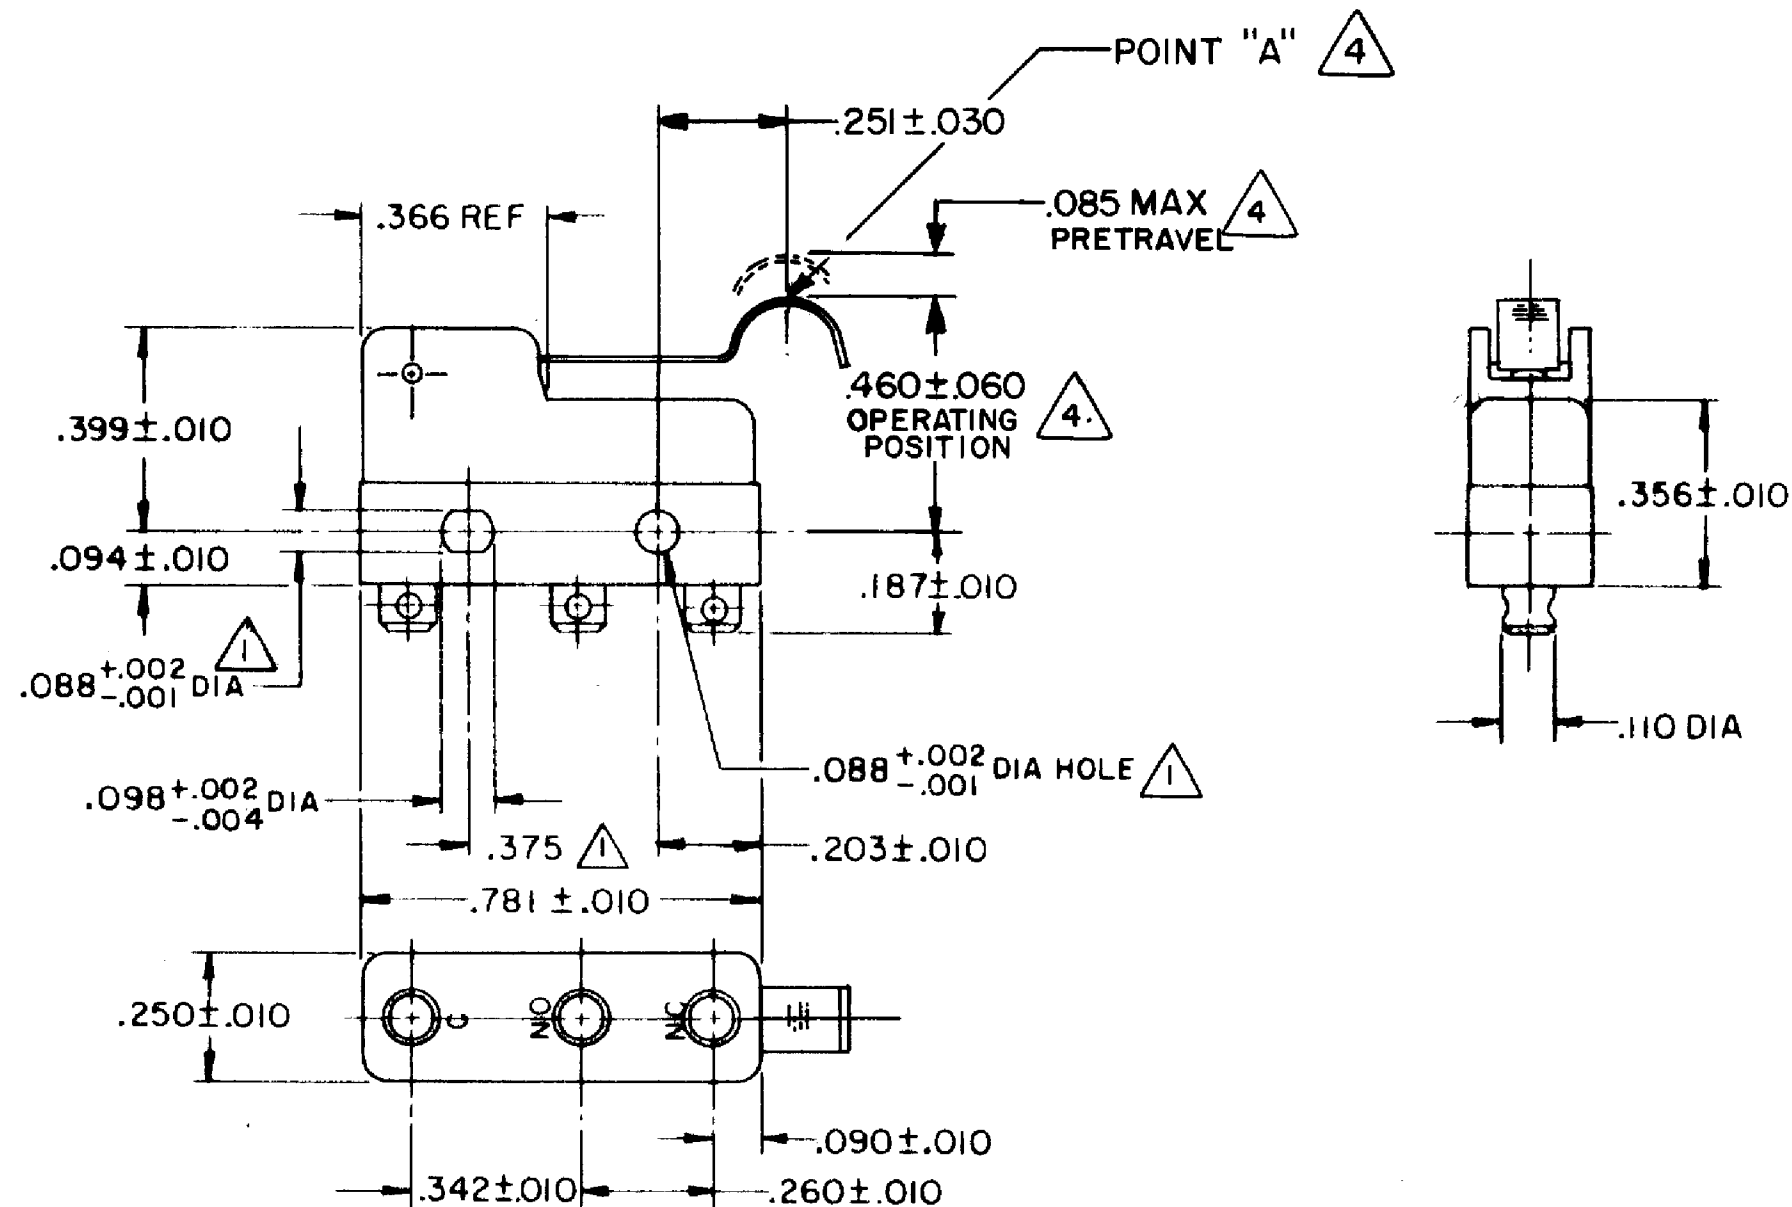


HONEYWELL
PART NUMBER

311SM4

PRODUCT CODE
TZA1240

REV	DOCUMENT	CHANGED BY	CHECK
4	0038113	PRS 12JUN08	BLR

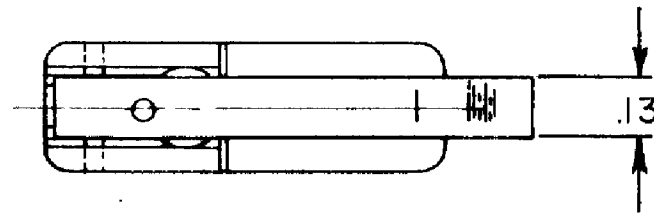

NOTE -

- 1- MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375±.002 CENTERS
- 2- SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
- 3- TERMINALS ARE PLATED FOR SOLDERING
- 4- CHARACTERISTICS TAKEN AT POINT "A"

RELEASE NO.
PR - 1530REPLACES
-

CHARACTERISTICS 4

OPERATING FORCE - - 40 GRAM MAX

RELEASE FORCE - - - - 7 GRAM MIN

DIFFERENTIAL TRAVEL - - - .019 MAX

OVERTRAVEL - - - - - .018 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

30 VOLTS DC RATING

	SEA LEVEL	50,000 FT
INDUCTIVE	3 AMP	2.5 AMP
RESISTIVE	5 AMP	5 AMP

MAXIMUM INRUSH 24 AMP

APPROVALS	KEMA, CE	5A, 250V ~ T85 1E4	CE
	UL, CSA	5A, 250 VAC ~	UL

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE	X	±	-
ONE PLACE	.X	±	0.030
TWO PLACE	.XX	±	0.015
THREE PLACE	.XXX	±	0.005
FOUR PLACE	.XXXX	±	-
ANGLES		±	-

THIRD ANGLE PROJECTION



DRAWN	VK	05 NOV 07
CHECK	RJ	05 NOV 07

THIS DRAWING COVERS A PROPRIETARY ITEM
AND IS THE PROPERTY OF HONEYWELL.
THIS DRAWING IS NOT TO BE COPIED OR USED
WITHOUT THE PERMISSION OF HONEYWELL.INTERPRET PER ANSI Y14.5M-1982
OTHER HONEYWELL ENGINEERING
STANDARDS MAY APPLY

RASTER

Honeywell

TITLE

SWITCH - BASIC

SIZE	TYPE	DRAWING NAME	REV
B	I	311SM4	4
SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1