
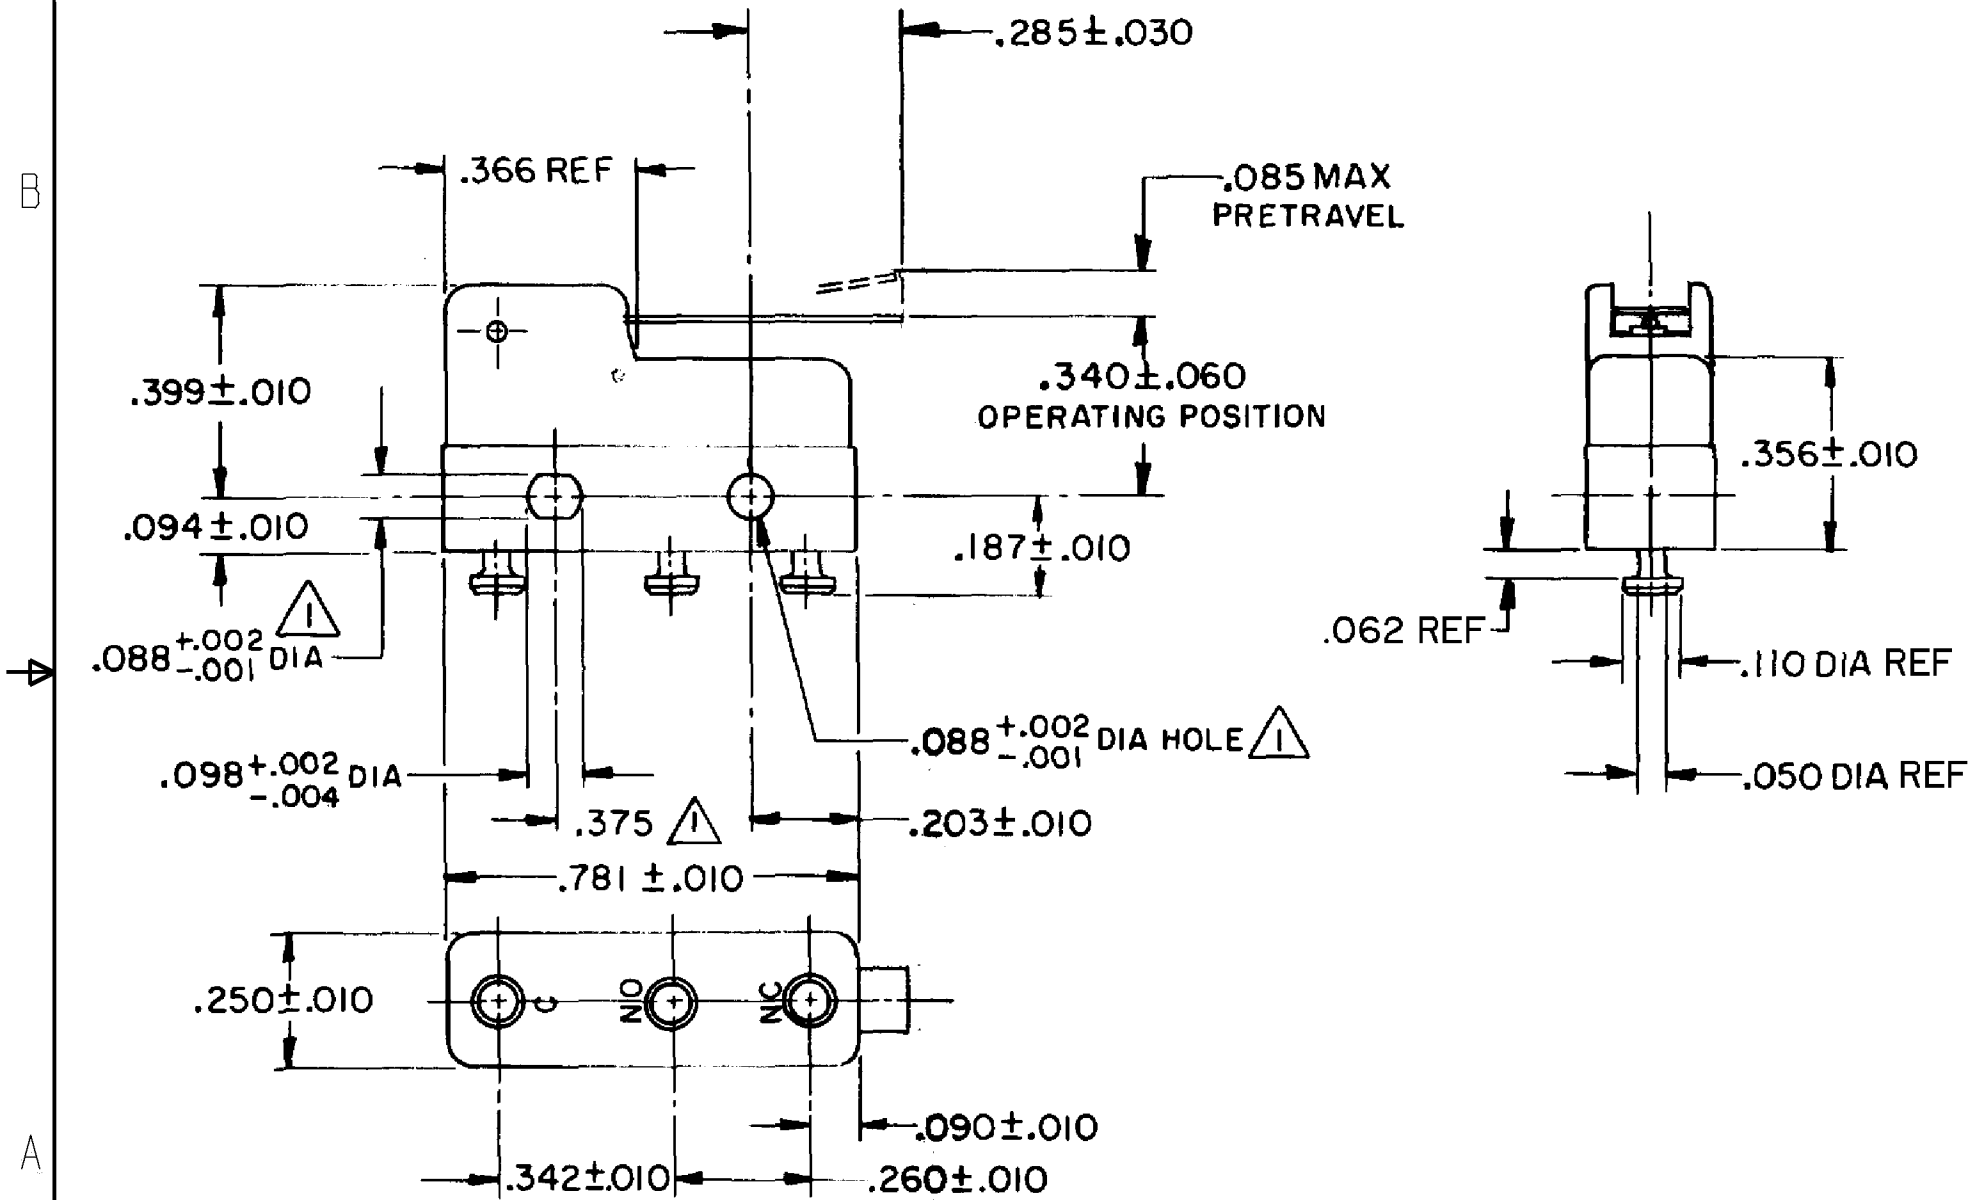


HONEYWELL PART NUMBER
311SM701-T
PRODUCT CODE TZA2681

REV	DOCUMENT	CHANGED BY	CHECK
7	0038445	SSK 21APR08	BLR

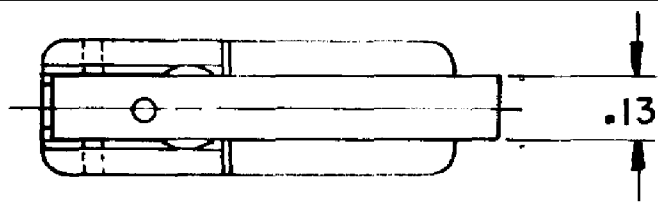

- NOTES
- ⚠ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375±.002 CENTERS
 - 2- SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
 - 3- TERMINALS ARE PLATED FOR SOLDERING

RELEASE NO.	PR-275
REPLACES	-

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ± 0.030 0.015 0.005		DRAWN	VK	21FEB 08	Honeywell				
OPERATING FORCE — — 16 GRAM MAX		CONTACT ARRANGEMENT SPDT					CHECK	RJ	21FEB 08					
RELEASE FORCE — — — 3 GRAM MIN		30 VOLTS DC RATING			THIRD ANGLE PROJECTION 		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC				
DIFFERENTIAL TRAVEL — — — .014 MAX		INDUCTIVE												
OVERTRAVEL — — — — — .020 MIN		RESISTIVE												
		MAXIMUM INRUSH 24 AMP												
		APPROVALS					INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME		REV
		UL, CSA					RASTER			B	I	311SM701-T		7
										SCALE	-	WEIGHT .006 LB MAX		SHEET 1 OF 1