


HONEYWELL PART NUMBER
311SM7017-T
PRODUCT CODE TZD3006


REV	DOCUMENT	CHANGED BY	CHECK
3	0038115	VS 28APR08	BLR

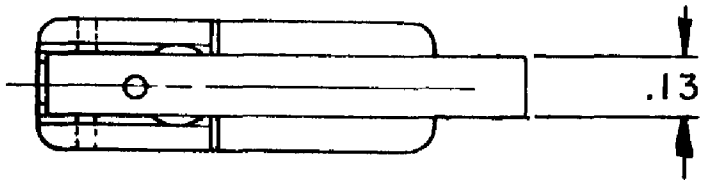

B

A

A

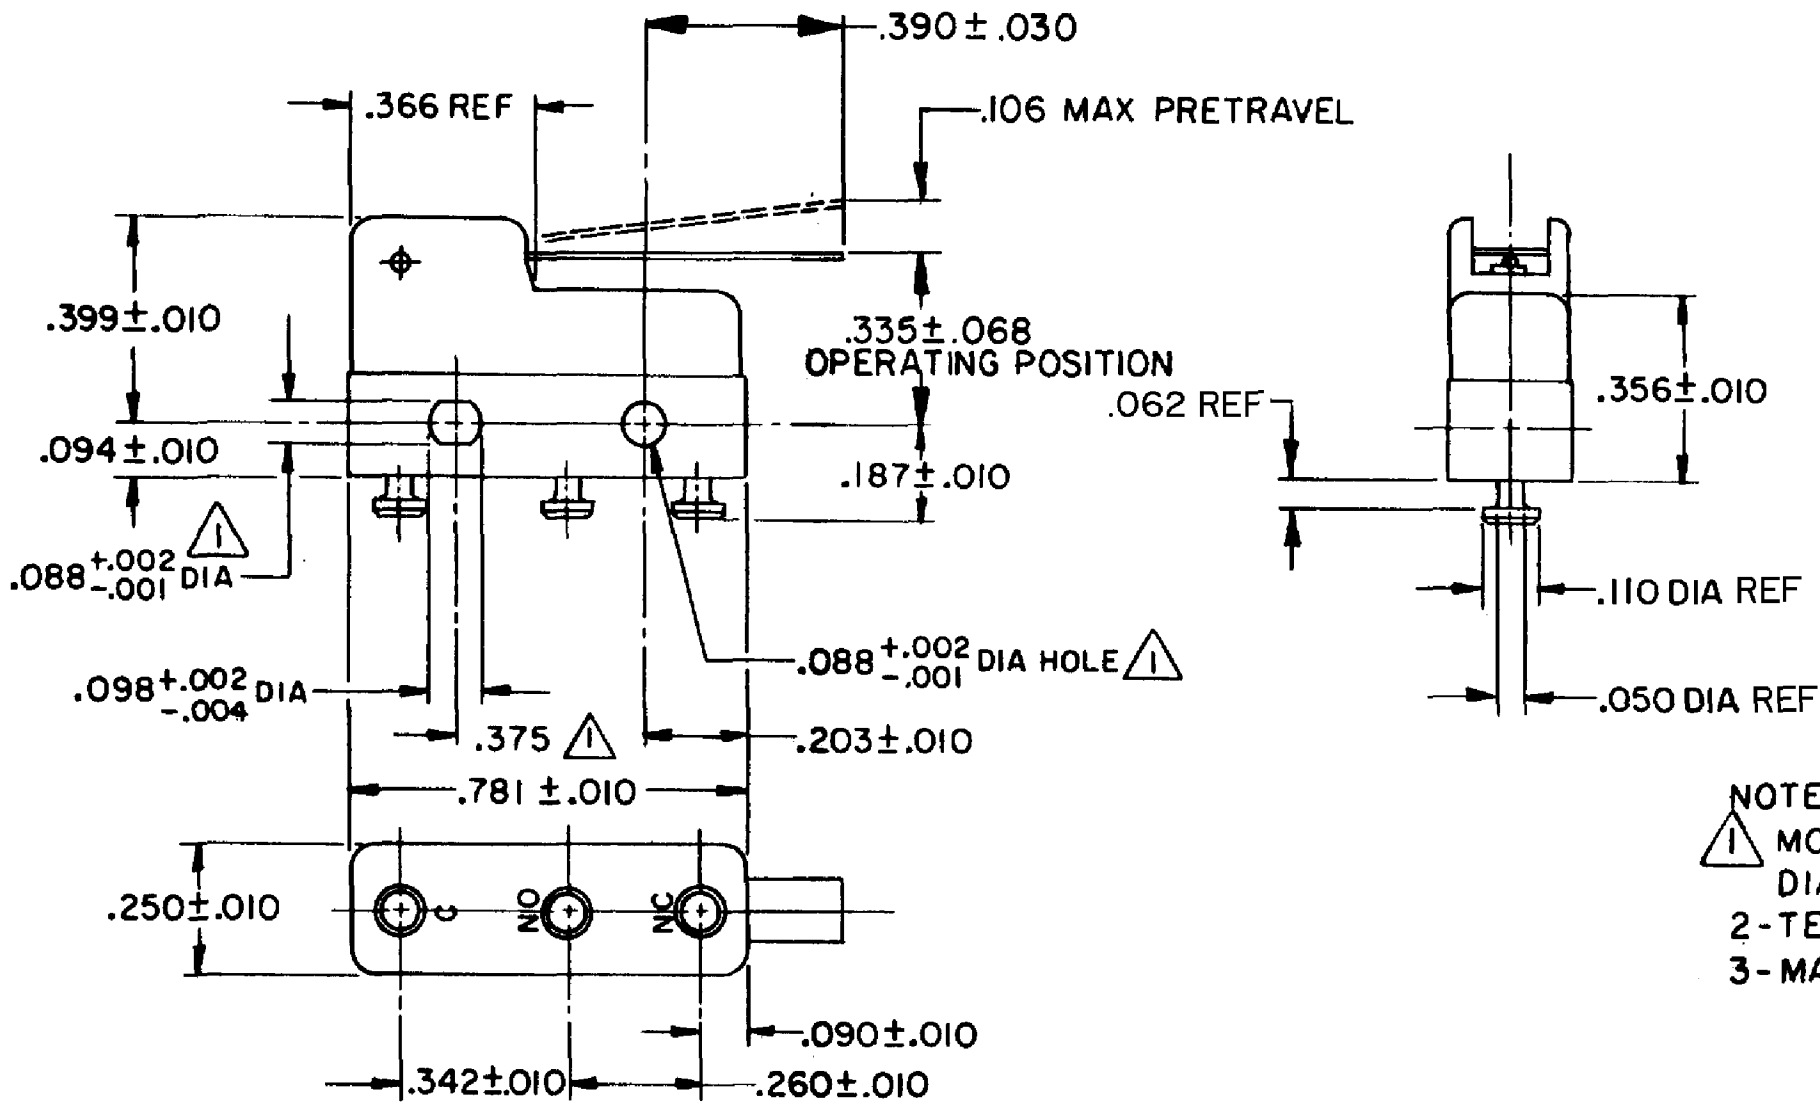

- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .067 MAX DIA ON .375±.002 CENTERS
 - 2-TERMINALS ARE PLATED FOR SOLDERING
 - 3-MATING CONTACT SURFACES ARE 24K SOLID GOLD OVERLAY

RELEASE NO.	PR - 15061
REPLACES	X84455 - SM

CHARACTERISTICS	ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ± THIRD ANGLE PROJECTION 	DRAWN	VK	29 NOV 07	Honeywell		
OPERATING FORCE — — 14 GRAM MAX	CONTACT ARRANGEMENT SPDT				CHECK	RJ	29 NOV 07			
RELEASE FORCE— — — — 3 GRAM MIN	30 VOLTS DC RATING				THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC		
DIFFERENTIAL TRAVEL— — — .014 MAX		SEA LEVEL	50,000 FT							
	INDUCTIVE	1/2 AMP	1/2 AMP							
OVERTRAVEL — — — — — .022 MIN	RESISTIVE	1 AMP	1 AMP	INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME	REV
APPROVALS	KEMA, CE	1A, 250V ~ T85 1E4	 				B	I	311SM7017-T	3
	UL, CSA	1A, 125 VAC	  BRAND L 22	RASTER			SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1