


HONEYWELL
PART NUMBER

311SM705-H58

PRODUCT CODE

TZA2703

REV	DOCUMENT	CHANGED BY	CHECK
6	0038445	SSK 21APR08	BLR

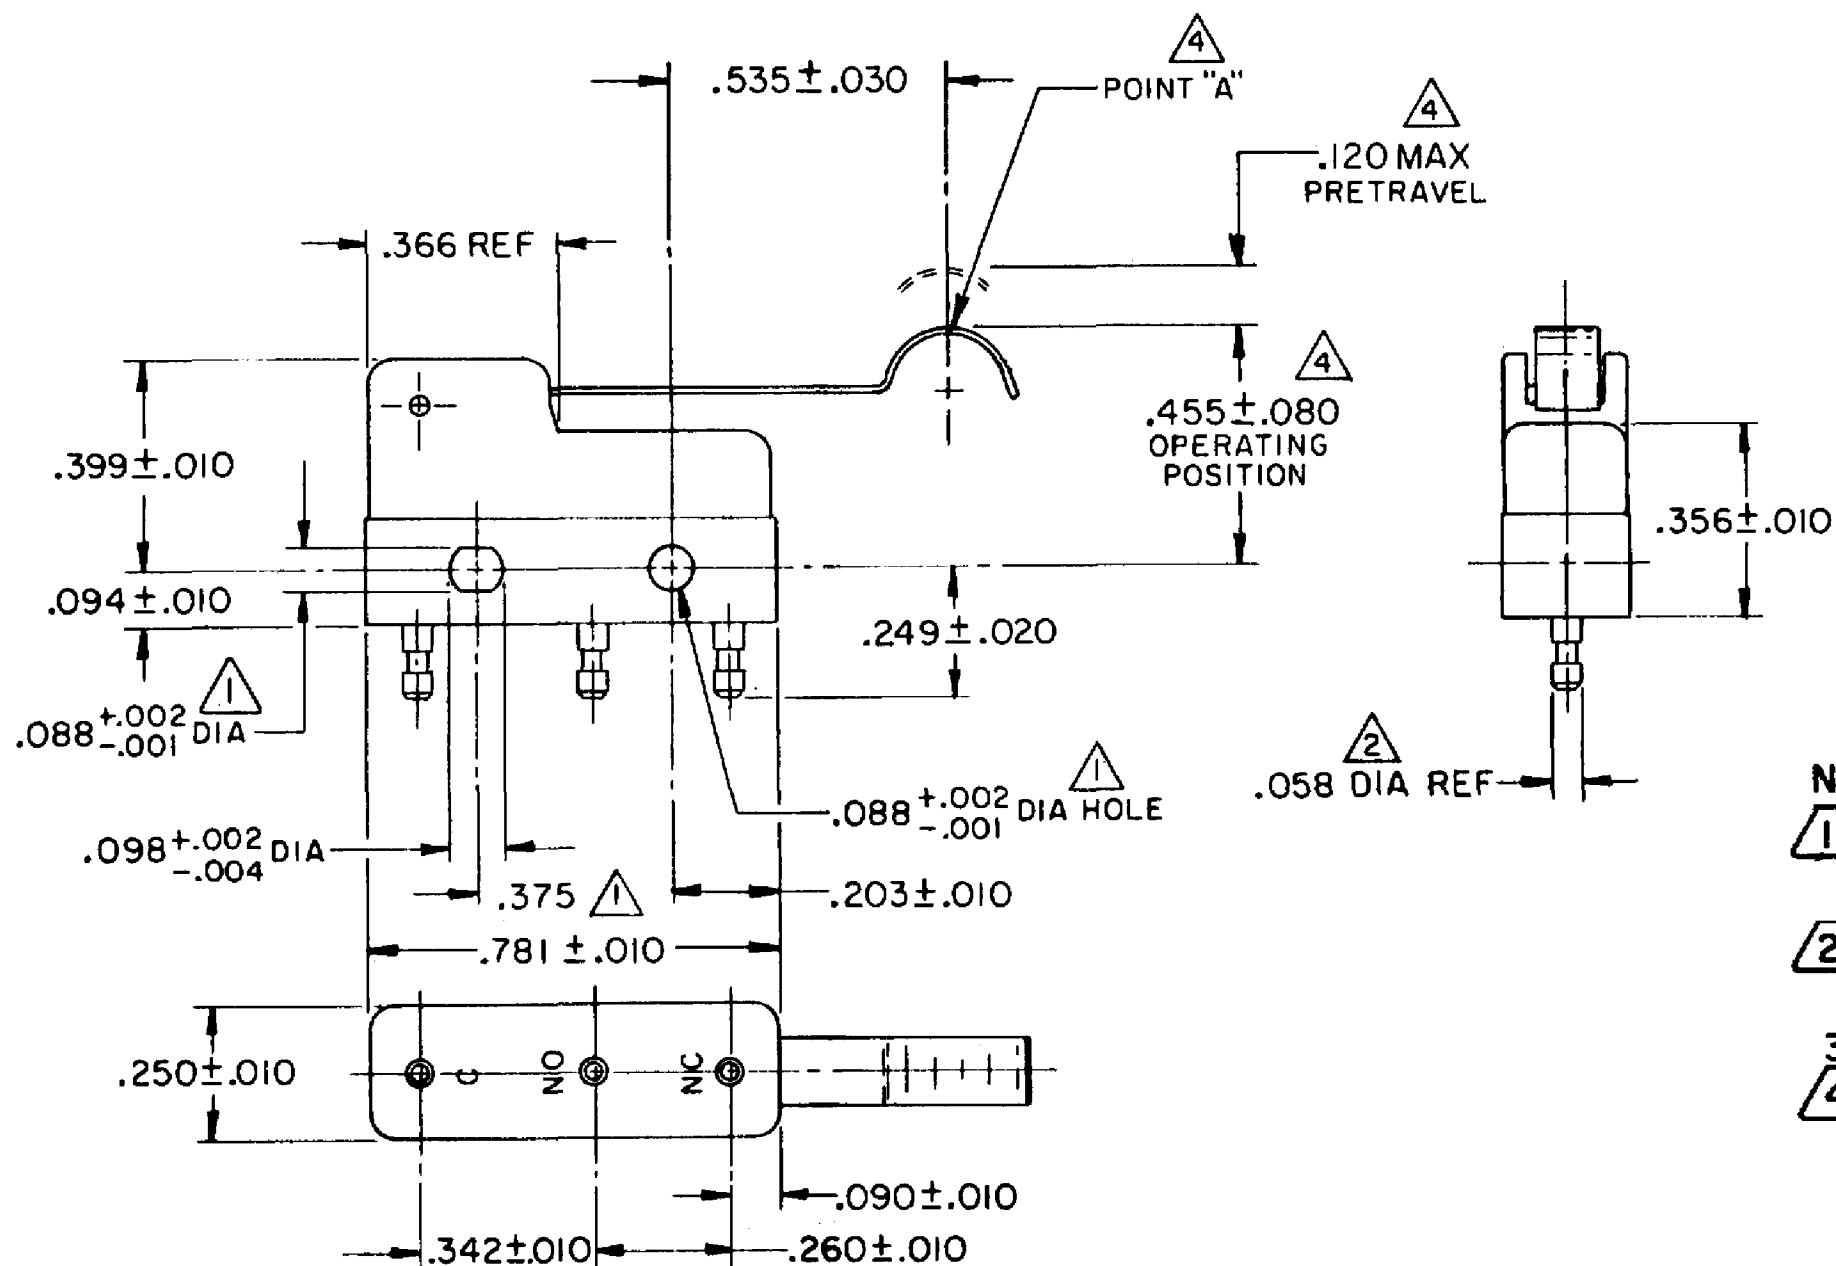

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $.087$ MAX DIA ON $.375 \pm .002$ CENTERS.
- 2 PLATED TERMINALS WILL ACCEPT "AMP INC" $.058$ DIA PIN RECEPTACLES.
- 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F
- 4 CHARACTERISTICS TAKEN AT POINT "A"

RELEASE NO. PR-5451

REPLACES

CHARACTERISTICS 4

OPERATING FORCE -- 12 GRAM MAX

RELEASE FORCE -- 2 GRAM MIN

DIFFERENTIAL TRAVEL -- $.015$ MAX

OVERTRAVEL -- $.026$ MIN

ELECTRICAL DATA			
CONTACT ARRANGEMENT S P D T			
30 VOLTS DC RATING			
	SEA LEVEL	50,000 FT	
INDUCTIVE	3 AMP	2.5 AMP	
RESISTIVE	5 AMP	5 AMP	
MAXIMUM INRUSH 24 AMP			
APPROVALS			
	UL, CSA	4A, <u>250</u> VAC	  BRAND L119


DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE	X	±
ONE PLACE	.X	±
TWO PLACE	.XX	±
THREE PLACE	.XXX	±
FOUR PLACE	.XXXX	±
ANGLES		±

0.030
0.015
0.005

THIRD ANGLE PROJECTION



DRAWN	VK	21FEB 08
CHECK	RJ	21FEB 08

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ANSI Y14.5M-1982
OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY

RASTER

Honeywell

TITLE

SWITCH - BASIC

SIZE	TYPE	DRAWING NAME	REV
B	I	311SM705-H58	6
SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1