
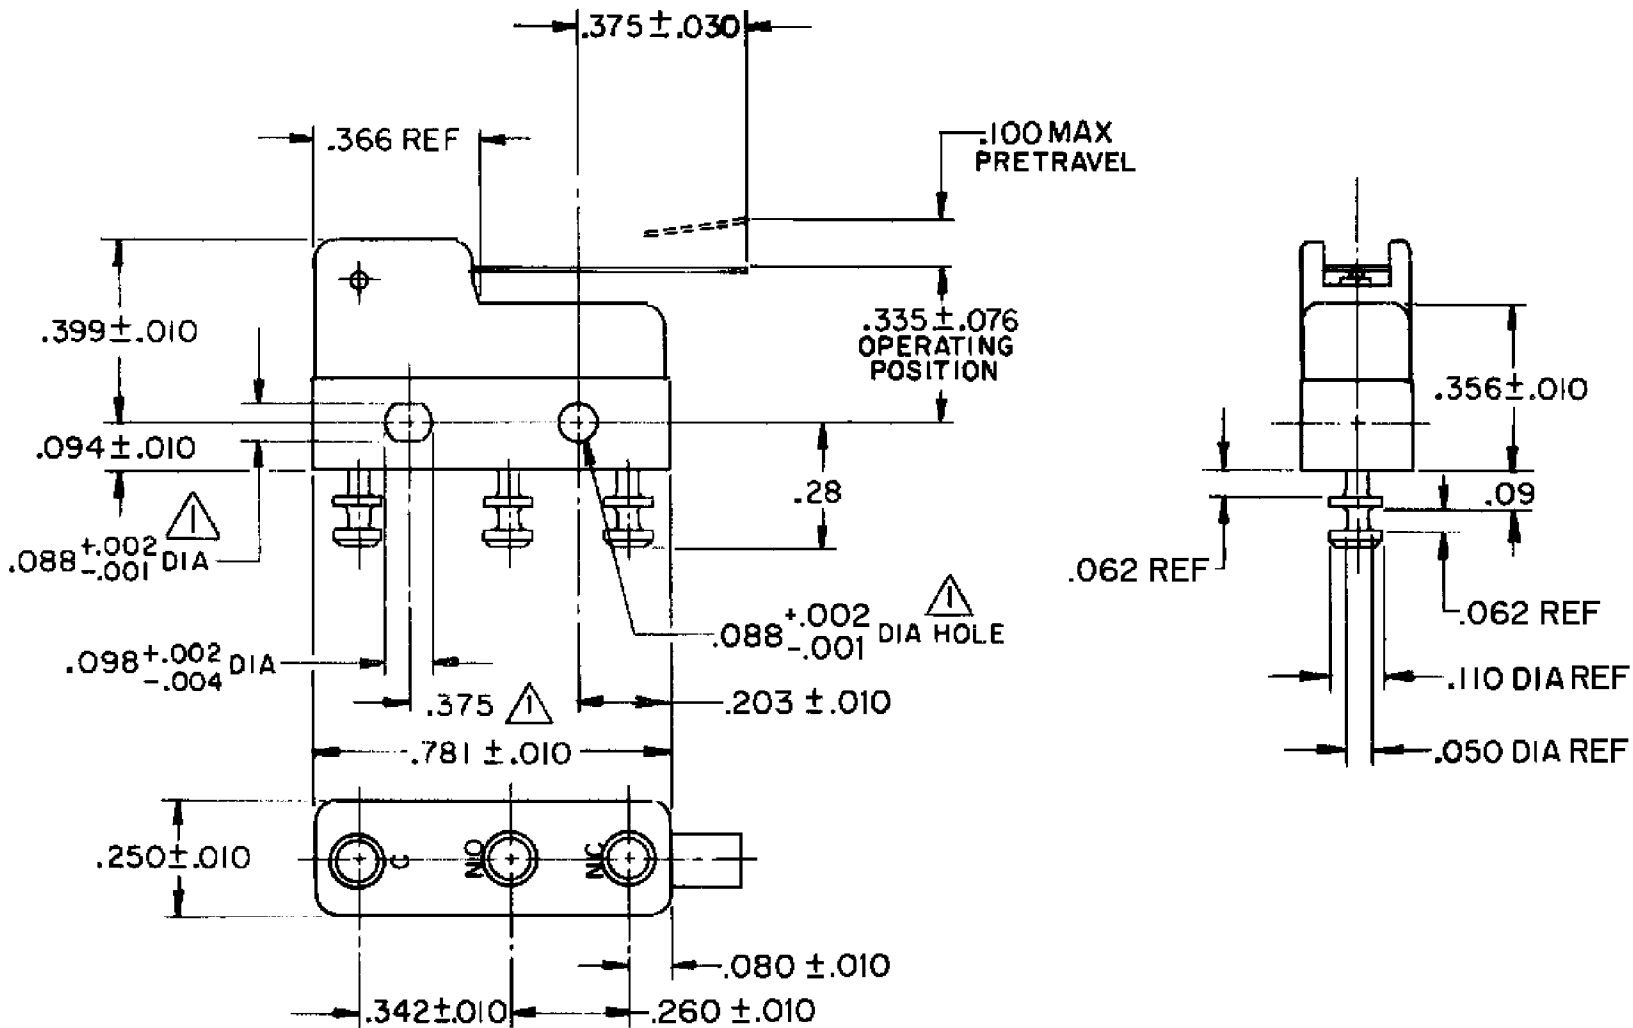


HONEYWELL PART NUMBER
311SM730-T2
PRODUCT CODE TZA2744

REV	DOCUMENT	CHANGED BY	CHECK
5	0038445	SSK 28APR08	BLR

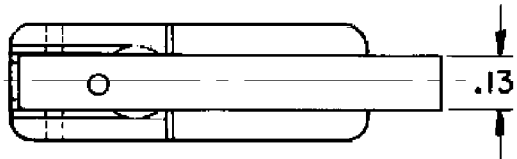

- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
 - 2 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F
 - 3 - TERMNALS ARE PLATED FOR SOLDERING

RELEASE NO.	PR-3069
REPLACES	-

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± ANGLES ± THIRD ANGLE PROJECTION 			DRAWN	VK	25FEB 08		Honeywell					
OPERATING FORCE — — 14 GRAM MAX		CONTACT ARRANGEMENT SPDT						CHECK	RJ	25FEB 08							
RELEASE FORCE— — — 2 GRAM MIN		30 VOLTS DC RATING						THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE SWITCH - BASIC					
DIFFERENTIAL TRAVEL— — — .015 MAX			SEA LEVEL	50,000 FT													
OVERTRAVEL — — — — — .045 MIN		INDUCTIVE	3 AMP	2.5 AMP		SIZE	TYPE					DRAWING NAME		REV			
		RESISTIVE	5 AMP	5 AMP		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				B	I	311SM730-T2		5			
		MAXIMUM INRUSH 24 AMP			THIRD ANGLE PROJECTION 				RASTER			SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1		
		APPROVALS															
			UL, CSA	4A, 250 VAC							BRAND L119						