
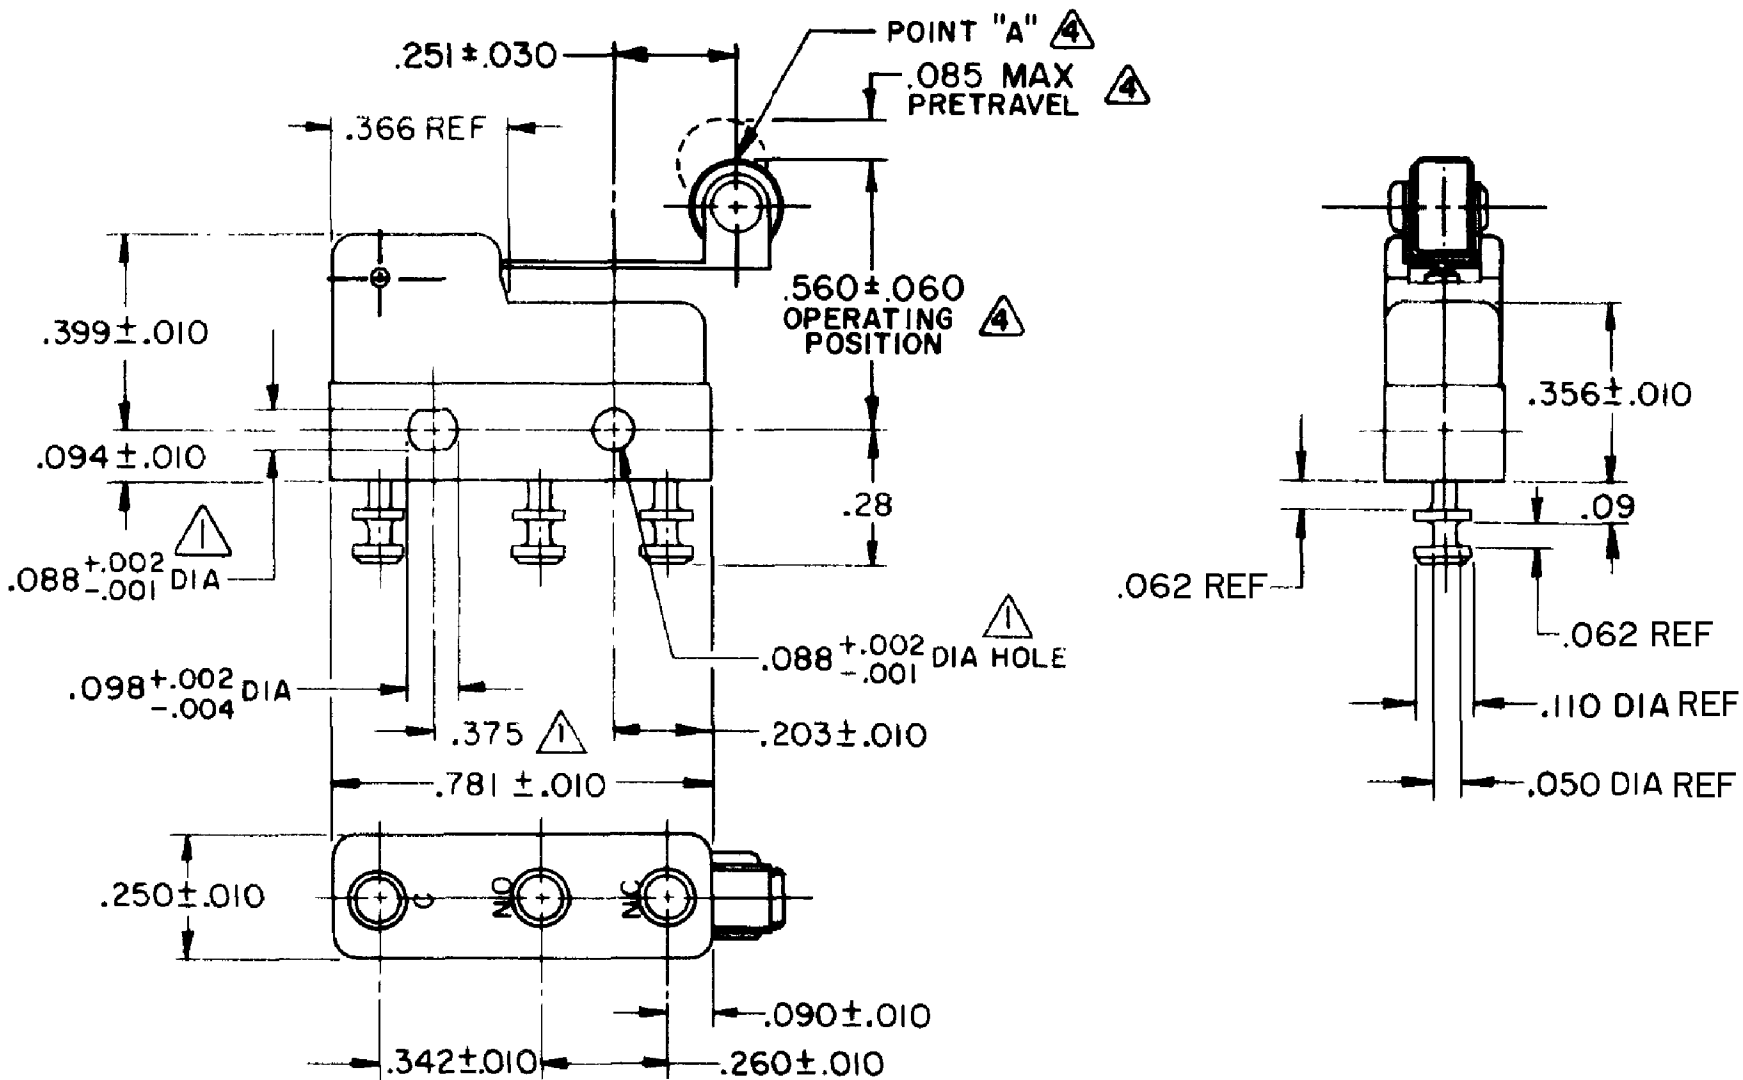



HONEYWELL PART NUMBER
311SM768-T2
PRODUCT CODE TZA2597

REV	DOCUMENT	CHANGED BY	CHECK
5	0038115	VS 28APR08	BLR

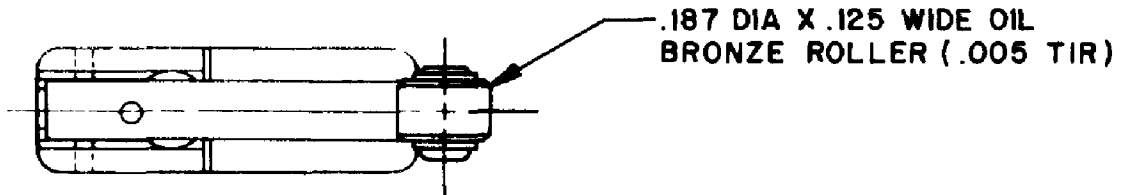

- NOTES
- 1- MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
 - 2- SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
 - 3- MATING CONTACT SURFACES ARE 24K SOLID GOLD OVERLAY
 - 4- CHARACTERISTICS TAKEN AT POINT "A"
 - 5- TERMINALS ARE PLATED FOR SOLDERING

RELEASE NO.	PR - 5148
REPLACES	X63388 - SM

CHARACTERISTICS 	ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ± 0.030 0.015 0.005	DRAWN	VK	21 NOV 07				
OPERATING FORCE — — 16 GRAM MAX	CONTACT ARRANGEMENT SPDT				CHECK	RJ	21 NOV 07				
RELEASE FORCE— — — — 3 GRAM MIN	30 VOLTS DC RATING				THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC			
DIFFERENTIAL TRAVEL— — — .013 MAX		SEA LEVEL	50,000 FT								
	INDUCTIVE	1/2 AMP	1/2 AMP								
OVERTRAVEL — — — — — .018 MIN	RESISTIVE	1 AMP	1 AMP	INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME	REV	
MAXIMUM INRUSH 2 AMP				THIRD ANGLE PROJECTION 			B	I	311SM768-T2	5	
APPROVALS	KEMA, CE	1A, 250V ~ T85 1E4  					SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1	
	UL, CSA	1A, 125 VAC  	BRAND L22								