


REV	DOCUMENT	CHANGED BY	CHECK
4	0038115	VS 28APR08	BLR

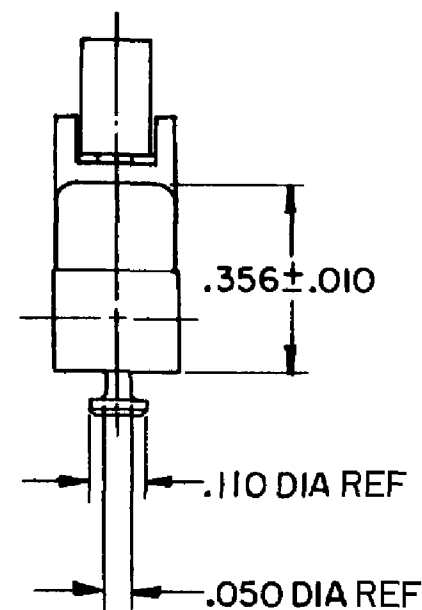

NOTES

- ① MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375±.002 CENTERS
- ② PLATED TERMINALS WILL ACCEPT "AMP INC" .058 DIA PIN RECEPTACLES
- ③ PROJECTION STYLE GOLD OVER SILVER CONTACTS
- ④ SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
- ⑤ CHARACTERISTICS TAKEN AT POINT "A"

RELEASE NO.	PR - 16536
-------------	------------

REPLACES	X88838 - SM
----------	-------------

CHARACTERISTICS 		ELECTRICAL DATA			DESIGN UNITS: INCH			DRAWN	VK	29 NOV 07	Honeywell				
OPERATING FORCE -- 22 GRAM MAX		CONTACT ARRANGEMENT S P D T			TOLERANCES UNLESS NOTED:			CHECK	RJ	29 NOV 07					
RELEASE FORCE-- -- 6 GRAM MIN		30 VOLTS DC RATING			NO PLACE X ±			THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC				
		SEA LEVEL 50,000 FT			ONE PLACE .X ± 0.030										
DIFFERENTIAL TRAVEL-- .013 MAX		INDUCTIVE 3 AMP 2.5 AMP			TWO PLACE .XX ± 0.015										
OVERTRAVEL-- .021 MIN		RESISTIVE 5 AMP 5 AMP			THREE PLACE .XXX ± 0.005										
		MAXIMUM INRUSH 24 AMP			FOUR PLACE .XXXX ±			INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME		REV
APPROVALS	KEMA, CE	5A, 250V ~ T85 1E4			THIRD ANGLE PROJECTION 						B	I	311SM8092-T		4
	UL, CSA	5A, 250 VAC						BRAND L4							
								RASTER			SCALE -	WEIGHT .006 LB MAX	SHEET 1 OF 1		