

HONEYWELL PART NUMBER
311SX4-H33
PRODUCT CODE VDS0035

REV	DOCUMENT	CHANGED BY	CHECK
5	0038558	SS 08MAY08	BLR



B

A

A

B

A

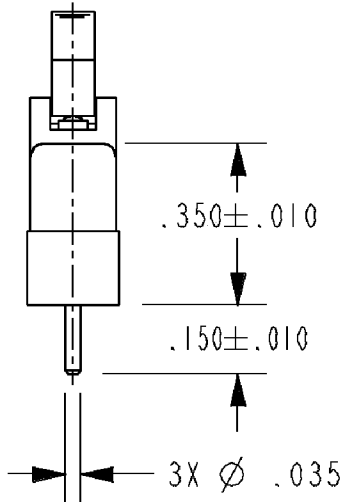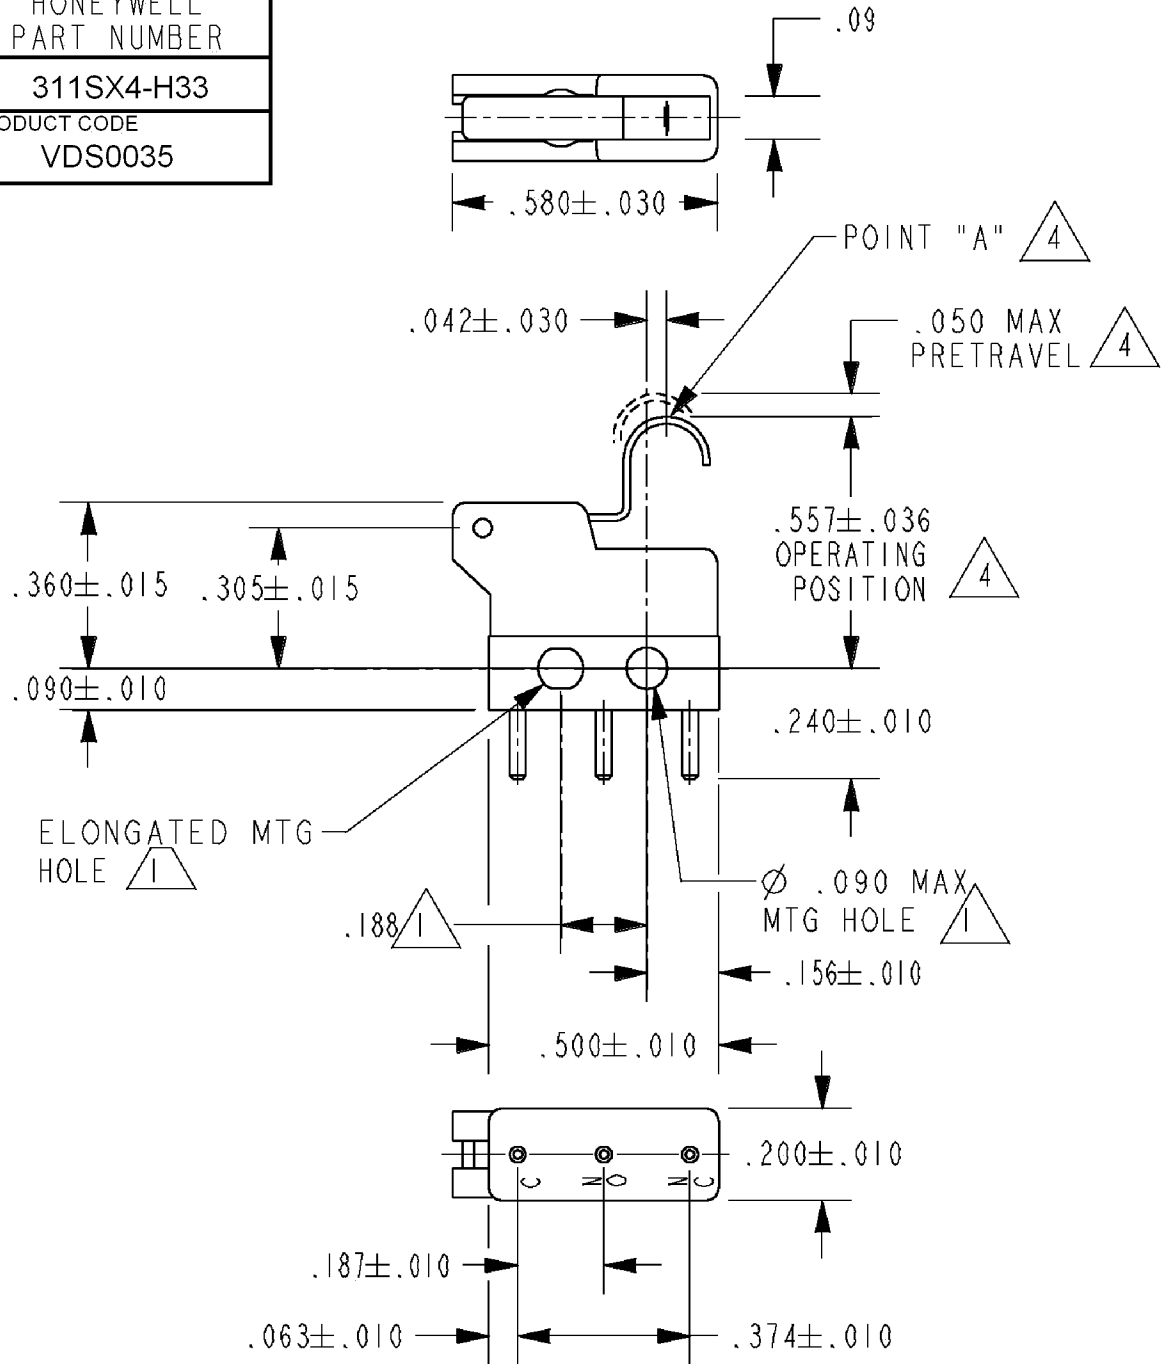

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188±.002 CENTERS
- 2 - TERMINALS ARE PLATED FOR SOLDERING
- 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F
- 4 CHARACTERISTICS ARE TAKEN AT POINT "A"

RELEASE NO.	PR-19365
REPLACES	X94336-SX

CHARACTERISTICS 4
OPERATING FORCE -- 60 GRAMS MAX
RELEASE FORCE --- 11 GRAMS MIN
DIFFERENTIAL TRAVEL-- .015 MAX
OVERTRAVEL - - - - .010 MIN

ELECTRICAL DATA				
CONTACT ARRANGEMENT S P D T				
	28 VOLTS DC RATING		115 VOLTS AC, 60 CPS	
	SEA LEVEL	50,000 FT	SEA LEVEL	
INDUCTIVE	3 AMP	2 AMP	5 AMP	
RESISTIVE	5 AMP	4 AMP	5 AMP	
-				
APPROVALS	KEMA, CE	5A 250 V ~ T125	5E4	 
	UL, CSA	5A <u>250</u> VAC	 	BRAND L4L

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:
NO PLACE X ±
ONE PLACE .X ±
TWO PLACE .XX ±
THREE PLACE .XXX ±
FOUR PLACE .XXXX ±
ANGLES ±
0.030
0.015
0.005
THIRD ANGLE PROJECTION

DRAWN	SPK	26FEB08
CHECK	RJ	26FEB08
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell				
TITLE SWITCH - BASIC				
SIZE	TYPE	DRAWING NAME		REV
B	I	311SX4-H33		5
SCALE	-	WEIGHT:.003 LB MAX	SHEET 1 OF 1	