


HONEYWELL PART NUMBER
311SX5-H58
PRODUCT CODE VDS0045

REV	DOCUMENT	CHANGED BY	CHECK
10	0038558	SS 08MAY08	BLR

B

A

A

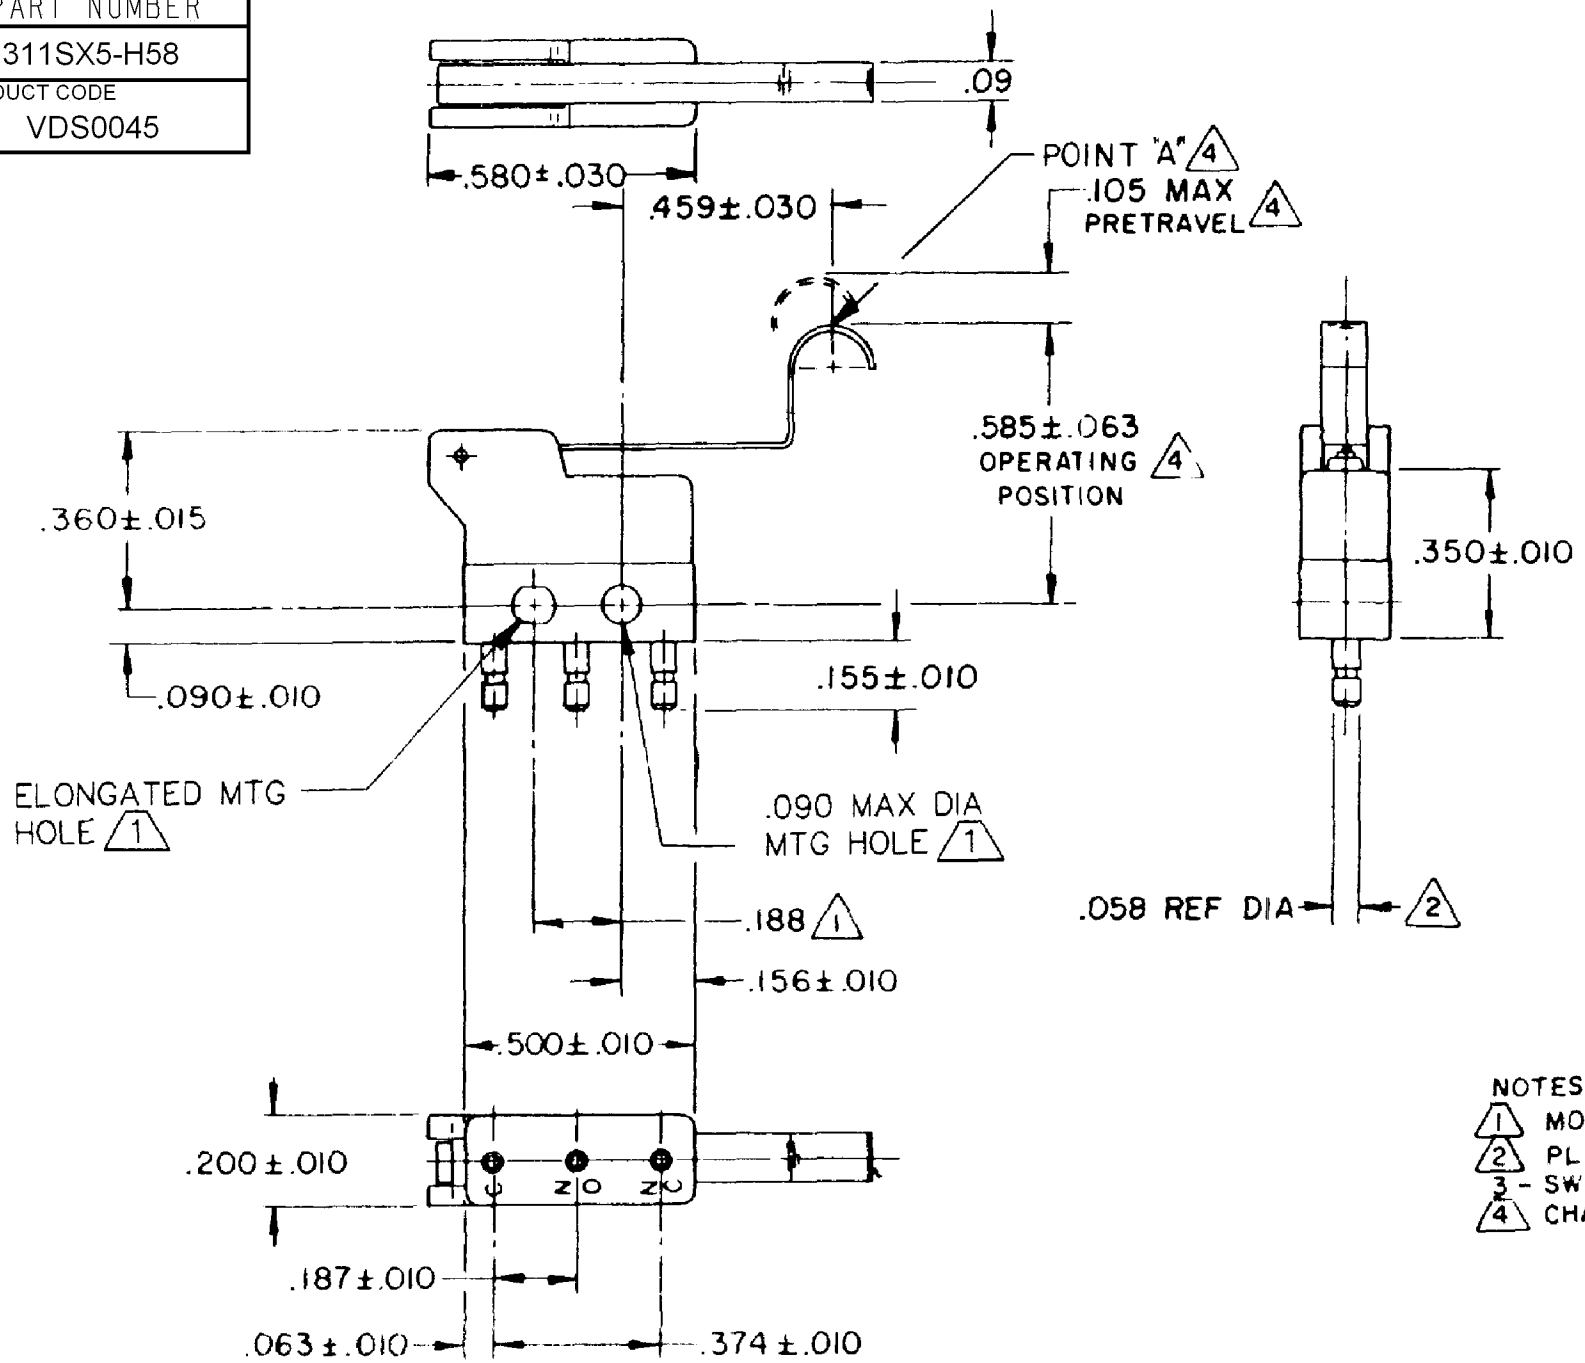

- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188 ± .002 CENTERS
 - 2 PLATED TERMINALS WILL ACCEPT "AMP INC" .058 DIA PIN RECEPTACLES.
 - 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250 ° F
 - 4 CHARACTERISTICS ARE TAKEN AT POINT "A"

RELEASE NO.	PR-3679
REPLACES	

CHARACTERISTICS 	ELECTRICAL DATA				DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± ANGLES ±				DRAWN	SPK	26FEB08					
OPERATING FORCE — — —30 GRAM MAX	CONTACT ARRANGEMENT S P D T								CHECK	RJ	26FEB08					
RELEASE FORCE— — — — 5 GRAM MIN		28 VOLTS DC RATING		115 VOLTS AC, 60 CPS		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE SWITCH - BASIC						
		SEA LEVEL	50,000 FT	SEA LEVEL												
DIFFERENTIAL TRAVEL— — .035 MAX	INDUCTIVE	3 AMP	2 AMP	5 AMP		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SIZE	TYPE	DRAWING NAME		REV		
OVERTRAVEL — — — — — .022 MIN	RESISTIVE	5 AMP	4 AMP	5 AMP						B	I	311SX5-H58		10		
APPROVALS		KEMA, CE	5A 250 V ~ T125 5E4  		THIRD ANGLE PROJECTION 				RASTER				SCALE	-	WEIGHT:	SHEET 1 OF 1
		UL, CSA	5A 250 VAC   BRAND L4L													