
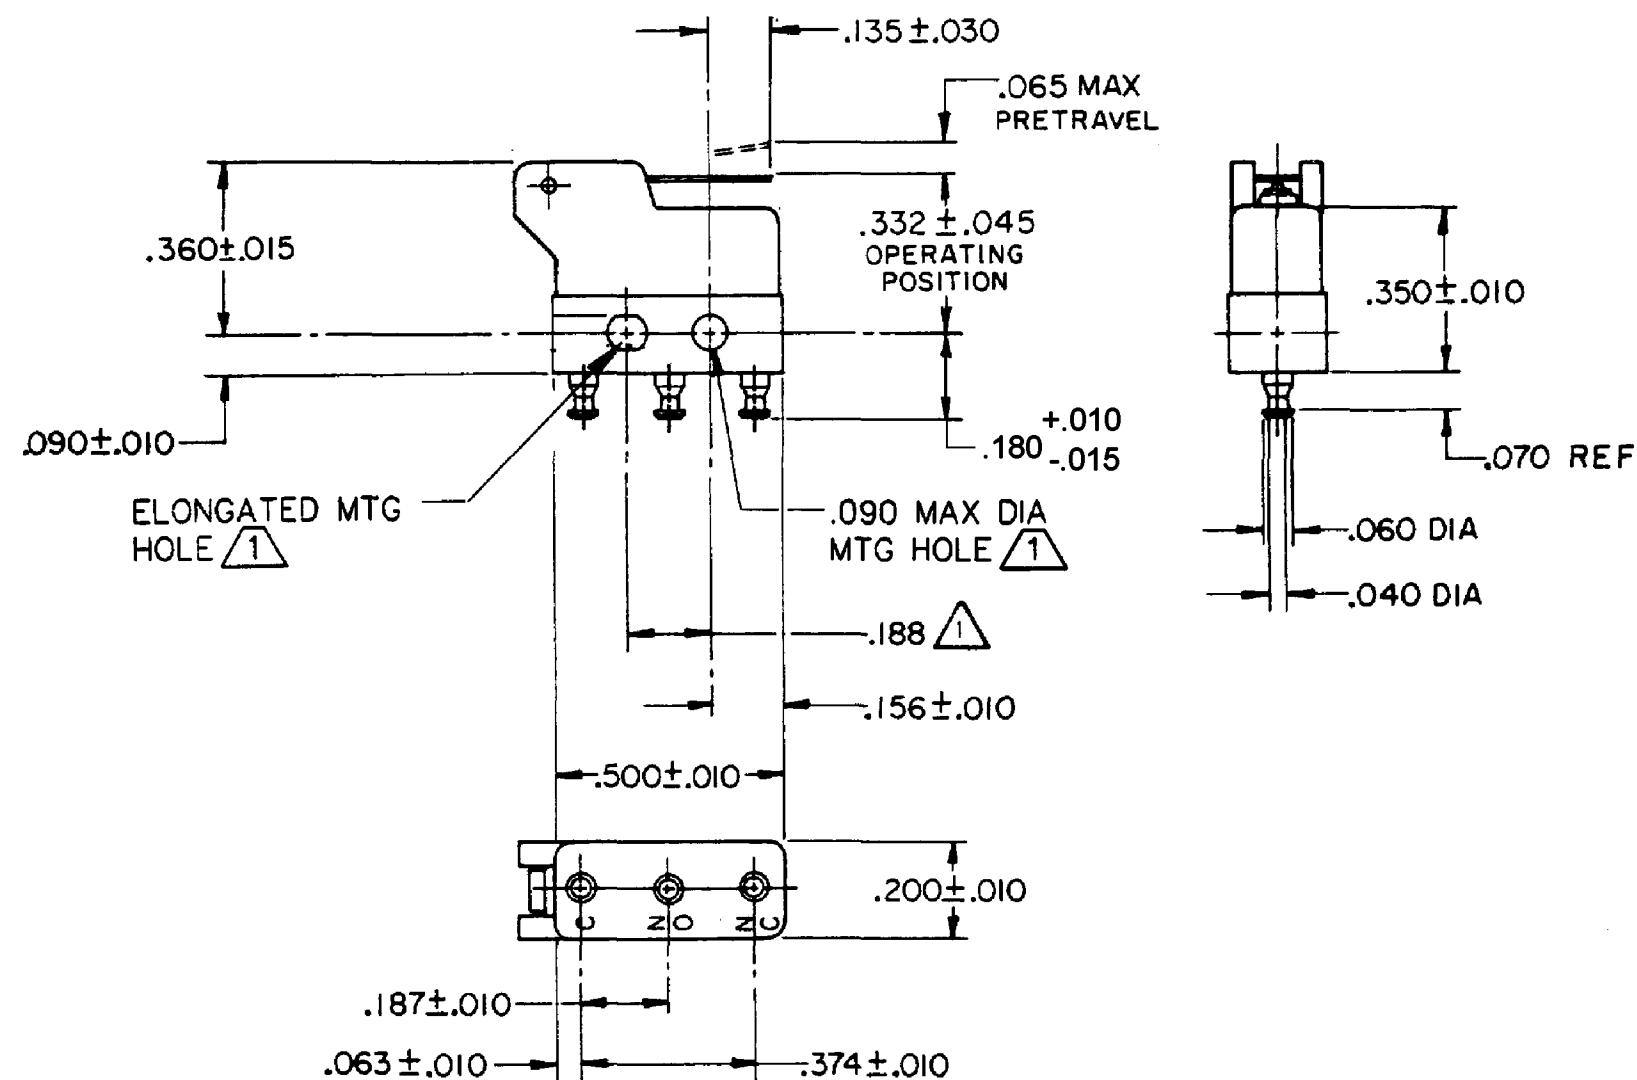


REV	DOCUMENT	CHANGED BY	CHECK
11	0060324	VKR 13JAN10	CMH



- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA OF .188±.002 CENTERS
- 2 - TERMINALS ARE SOLDER DIPPED WITH ROHS-COMPLAINT TIN/COPPER/SILVER SOLDER
- 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
- 4 - MOVABLE CONTACT MATERIAL – 24K SOLID GOLD OVERLAY
- 5 - STATIONARY CONTACT MATERIAL – GOLD ALLOY

RELEASE NO.	PR-5313
REPLACES	

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH			DRAWN	SPK	27FEB08	Honeywell				
OPERATING FORCE ----- 50 GRAMS MAX		CONTACT ARRANGEMENT S P D T			TOLERANCES UNLESS NOTED:			CHECK	RJ	27FEB08					
RELEASE FORCE ----- 9 GRAMS MIN		30 VOLTS DC RATING			NO PLACE X ±			THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC				
		SEA LEVEL 50,000 FT			ONE PLACE .X ± .030										
DIFFERENTIAL TRAVEL --- .020 MAX		INDUCTIVE 0.5 AMP 0.5 AMP			TWO PLACE .XX ± .015										
OVERTRAVEL ----- .014 MIN		RESISTIVE 1 AMP 1 AMP			THREE PLACE .XXX ± .005										
		MAXIMUM INRUSH 2 AMP			FOUR PLACE .XXXX ±			INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME		REV
		APPROVALS KEMA, CE 1A 250 V ~ T125 25E3 			THIRD ANGLE PROJECTION							B	I	313SX1-T	
		UL, CSA 1A 125 VAC   BRAND L22J					SCALE	-	WEIGHT: .003 LB MAX	SHEET 1 OF 1					