
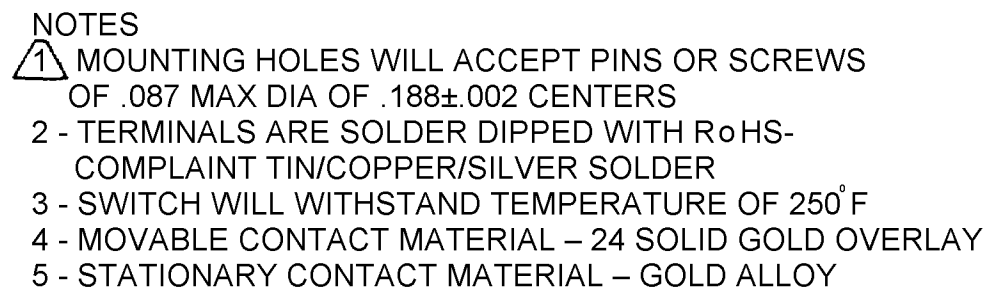


REV	DOCUMENT	CHANGED BY	CHECK
13	0060324	VKR 13JAN10	CMH



RELEASE NO.	PR-3162
REPLACES	

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± .030 TWO PLACE .XX ± .015 THREE PLACE .XXX ± .005 FOUR PLACE .XXXX ± ANGLES ±			DRAWN	SPK	27FEB08		Honeywell TITLE SWITCH - BASIC					
OPERATING FORCE ----- 30 GRAMS MAX		CONTACT ARRANGEMENT S P D T						CHECK	RJ	27FEB08							
RELEASE FORCE----- 5 GRAMS MIN		30 VOLTS DC RATING			THIRD ANGLE PROJECTION 			THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				SIZE B TYPE I DRAWING NAME 313SX2-T REV 13					
		SEA LEVEL 50,000 FT															
DIFFERENTIAL TRAVEL---.035 MAX		INDUCTIVE 0.5 AMP 0.5 AMP															
OVERTRAVEL-----.025 MIN		RESISTIVE 1 AMP 1 AMP															
		MAXIMUM INRUSH 2 AMP						INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SCALE - WEIGHT: SHEET 1 OF 1					
APPROVALS	KEMA, CE	1A 250 V ~ T125 25E3															CE
	UL, CSA	1A 125 VAC															BRAND L22J