

HONEYWELL PART NUMBER
313SX3-T
PRODUCT CODE VDT0055

REV	DOCUMENT	CHANGED BY	CHECK
10	0060324	VKR 13JAN10	CMH

B


A

A

B

A

A

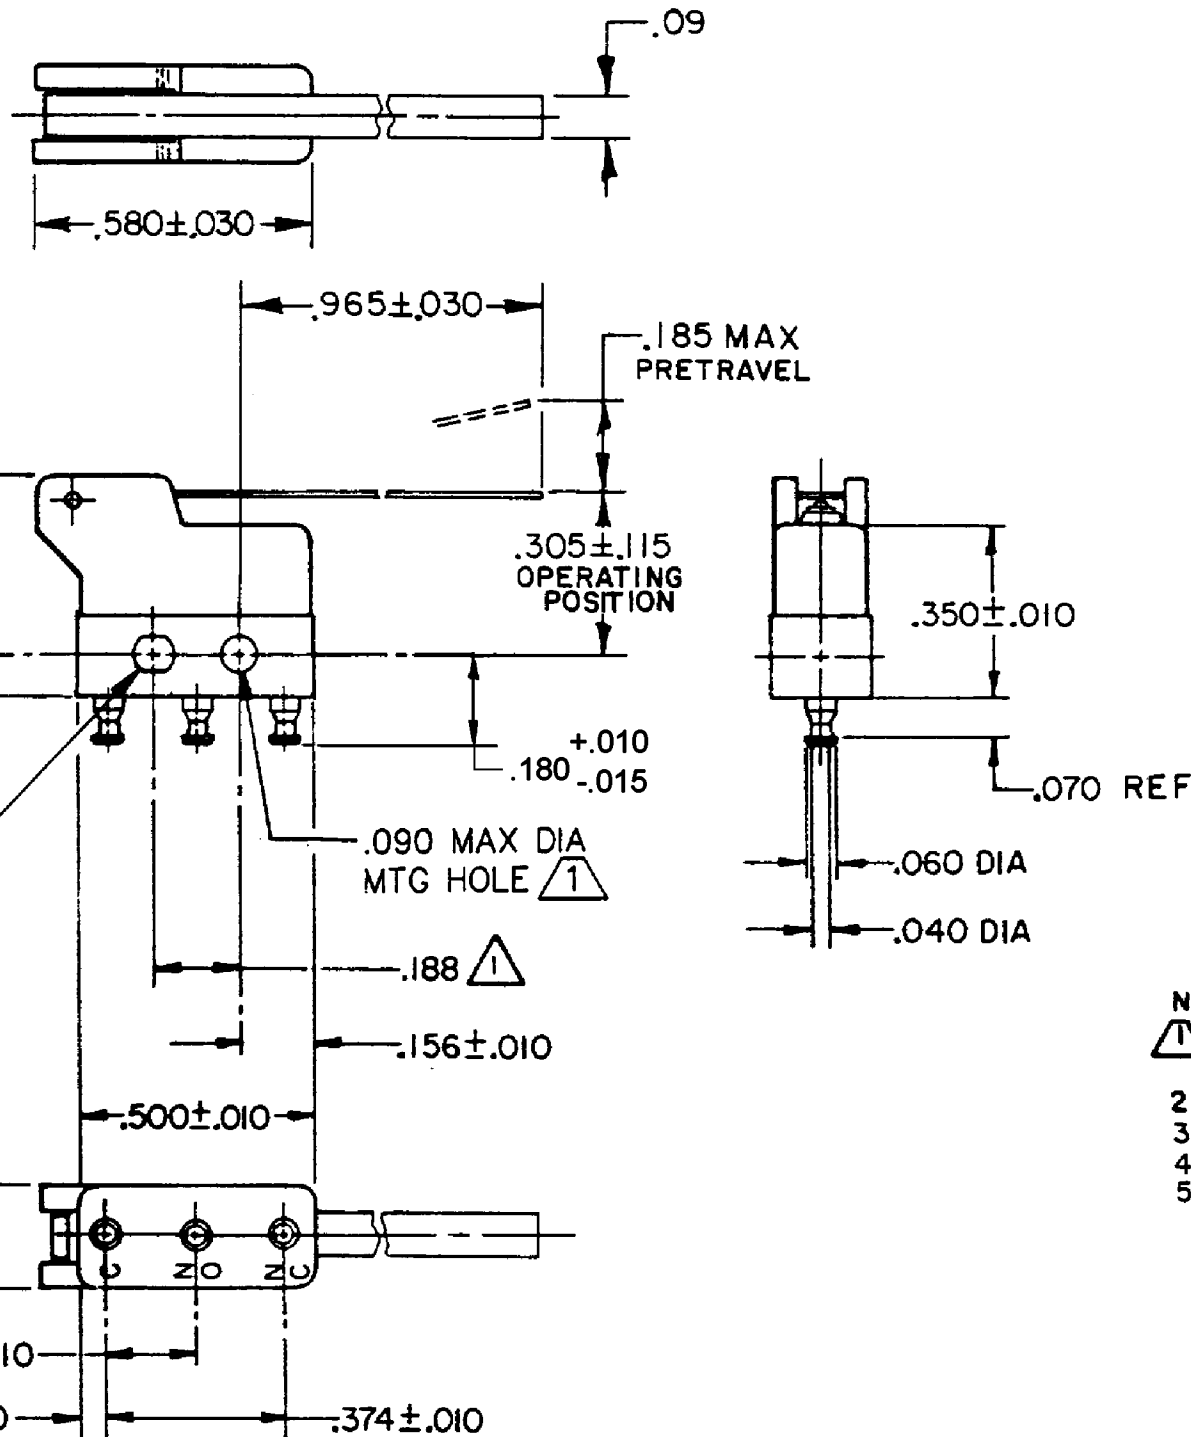

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA OF .188±.002 CENTERS
- 2 - TERMINALS ARE SOLDER DIPPED WITH RoHS-COMPLIANT TIN/COPPER/SILVER SOLDER.
- 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
- 4 - MOVABLE CONTACT MATERIAL - 24 SOLID GOLD OVERLAY
- 5 - STATIONARY CONTACT MATERIAL - GOLD ALLOY

RELEASE NO.	PR-10995
REPLACES	

CHARACTERISTICS
OPERATING FORCE ----- 20 GRAMS MAX
RELEASE FORCE ----- 3 GRAMS MIN
DIFFERENTIAL TRAVEL --- .060 MAX
OVERTRAVEL ----- .024 MIN

ELECTRICAL DATA			
CONTACT ARRANGEMENT S P D T			
30 VOLTS DC RATING			
	SEA LEVEL	50,000 FT	
INDUCTIVE	0.5 AMP	0.5 AMP	
RESISTIVE	1 AMP	1 AMP	
MAXIMUM INRUSH 2 AMP			
APPROVALS	KEMA, CE	1A 250 V ~ T125 25E3	 05 
	UL, CSA	1A 125 VAC	  BRAND
			L22J

DESIGN UNITS: INCH			
TOLERANCES UNLESS NOTED:			
NO PLACE	X	±	
ONE PLACE	.X	±	.030
TWO PLACE	.XX	±	.015
THREE PLACE	.XXX	±	.005
FOUR PLACE	.XXXX	±	
ANGLES		±	
THIRD ANGLE PROJECTION			
			

DRAWN	SPK	27FEB08
CHECK	RJ	27FEB08
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell				
TITLE SWITCH - BASIC				
SIZE B	TYPE I	DRAWING NAME 313SX3-T		REV 10
SCALE -	WEIGHT:	SHEET 1 OF 1		