


HONEYWELL PART NUMBER
313SX30-H33
PRODUCT CODE VDT0272

REV	DOCUMENT	CHANGED BY	CHECK
4	0038558	SS 08MAY08	BLR

B

B

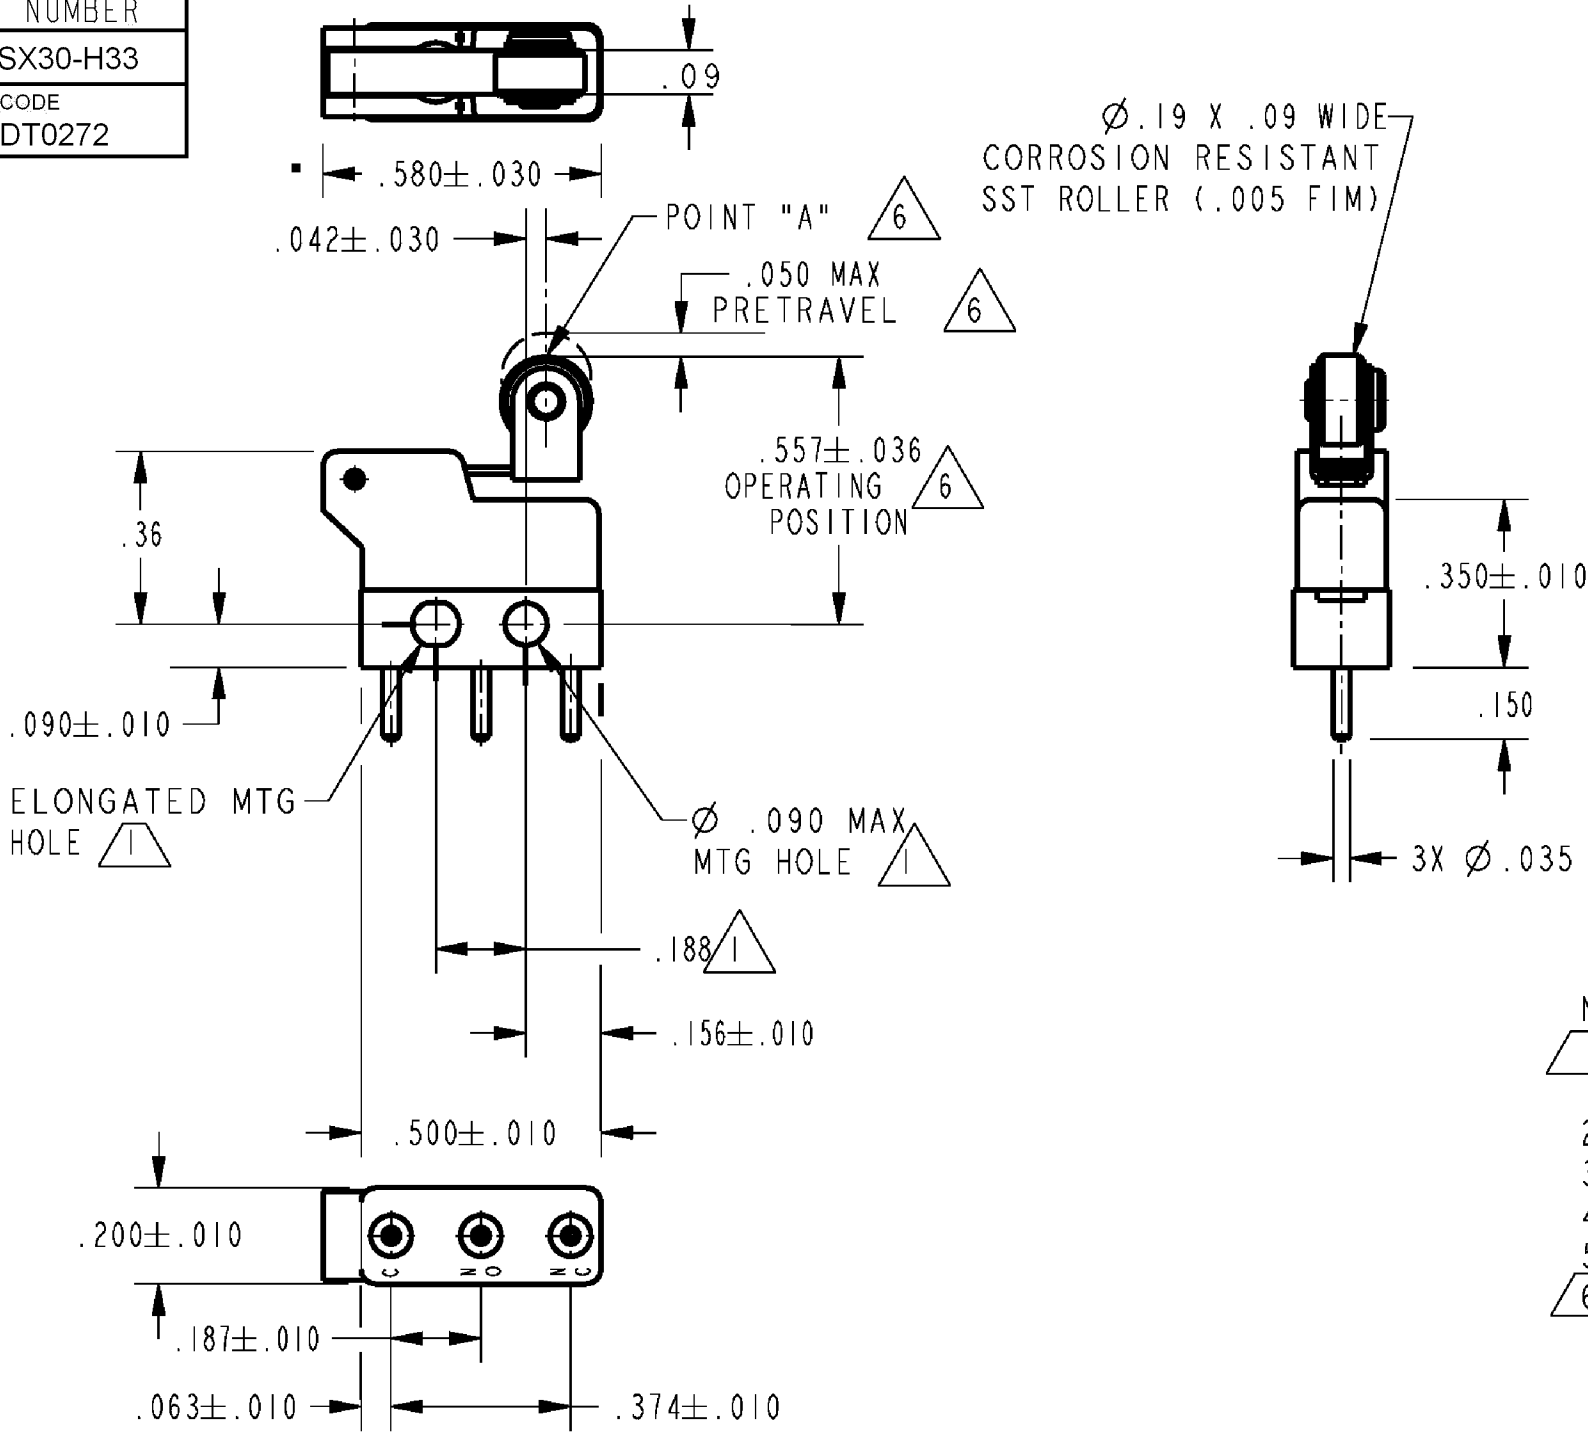


- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø.087 MAX ON .188±.002 CENTERS
 - 2 - TERMINALS ARE PLATED FOR SOLDERING
 - 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
 - 4 - MOVABLE CONTACT MATERIAL -24K SOLID GOLD OVERLAY
 - 5 - STATIONARY CONTACT MATERIAL - GOLD ALLOY
 - 6 CHARACTERISTICS TAKEN AT POINT "A"

RELEASE NO.
PR-20399

REPLACES
X94368-SX

A

A

CHARACTERISTICS 	ELECTRICAL DATA		DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ± 0.030 0.015 0.005		DRAWN	SPK	27FEB08	Honeywell				
OPERATING FORCE ----- 68 GRAMS MAX	CONTACT ARRANGEMENT SPDT				CHECK	RJ	27FEB08				TITLE SWITCH - BASIC	
RELEASE FORCE-----11GRAMS MIN					THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.							
DIFFERENTIAL TRAVEL---.015 MAX					INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE B	TYPE I	DRAWING NAME 313SX30-H33		REV 4
OVERTRAVEL----- .010 MIN			APPROVALS	KEMA, CE UL, CSA	1A 250 V ~ T125 25E3   1A 125 VAC   BRAND L22J	THIRD ANGLE PROJECTION 			RASTER			SCALE -