


HONEYWELL PART NUMBER
313SX5-T
PRODUCT CODE VDT0065

REV	DOCUMENT	CHANGED BY	CHECK
11	0060324	VKR 13JAN10	CMH

B

A

A

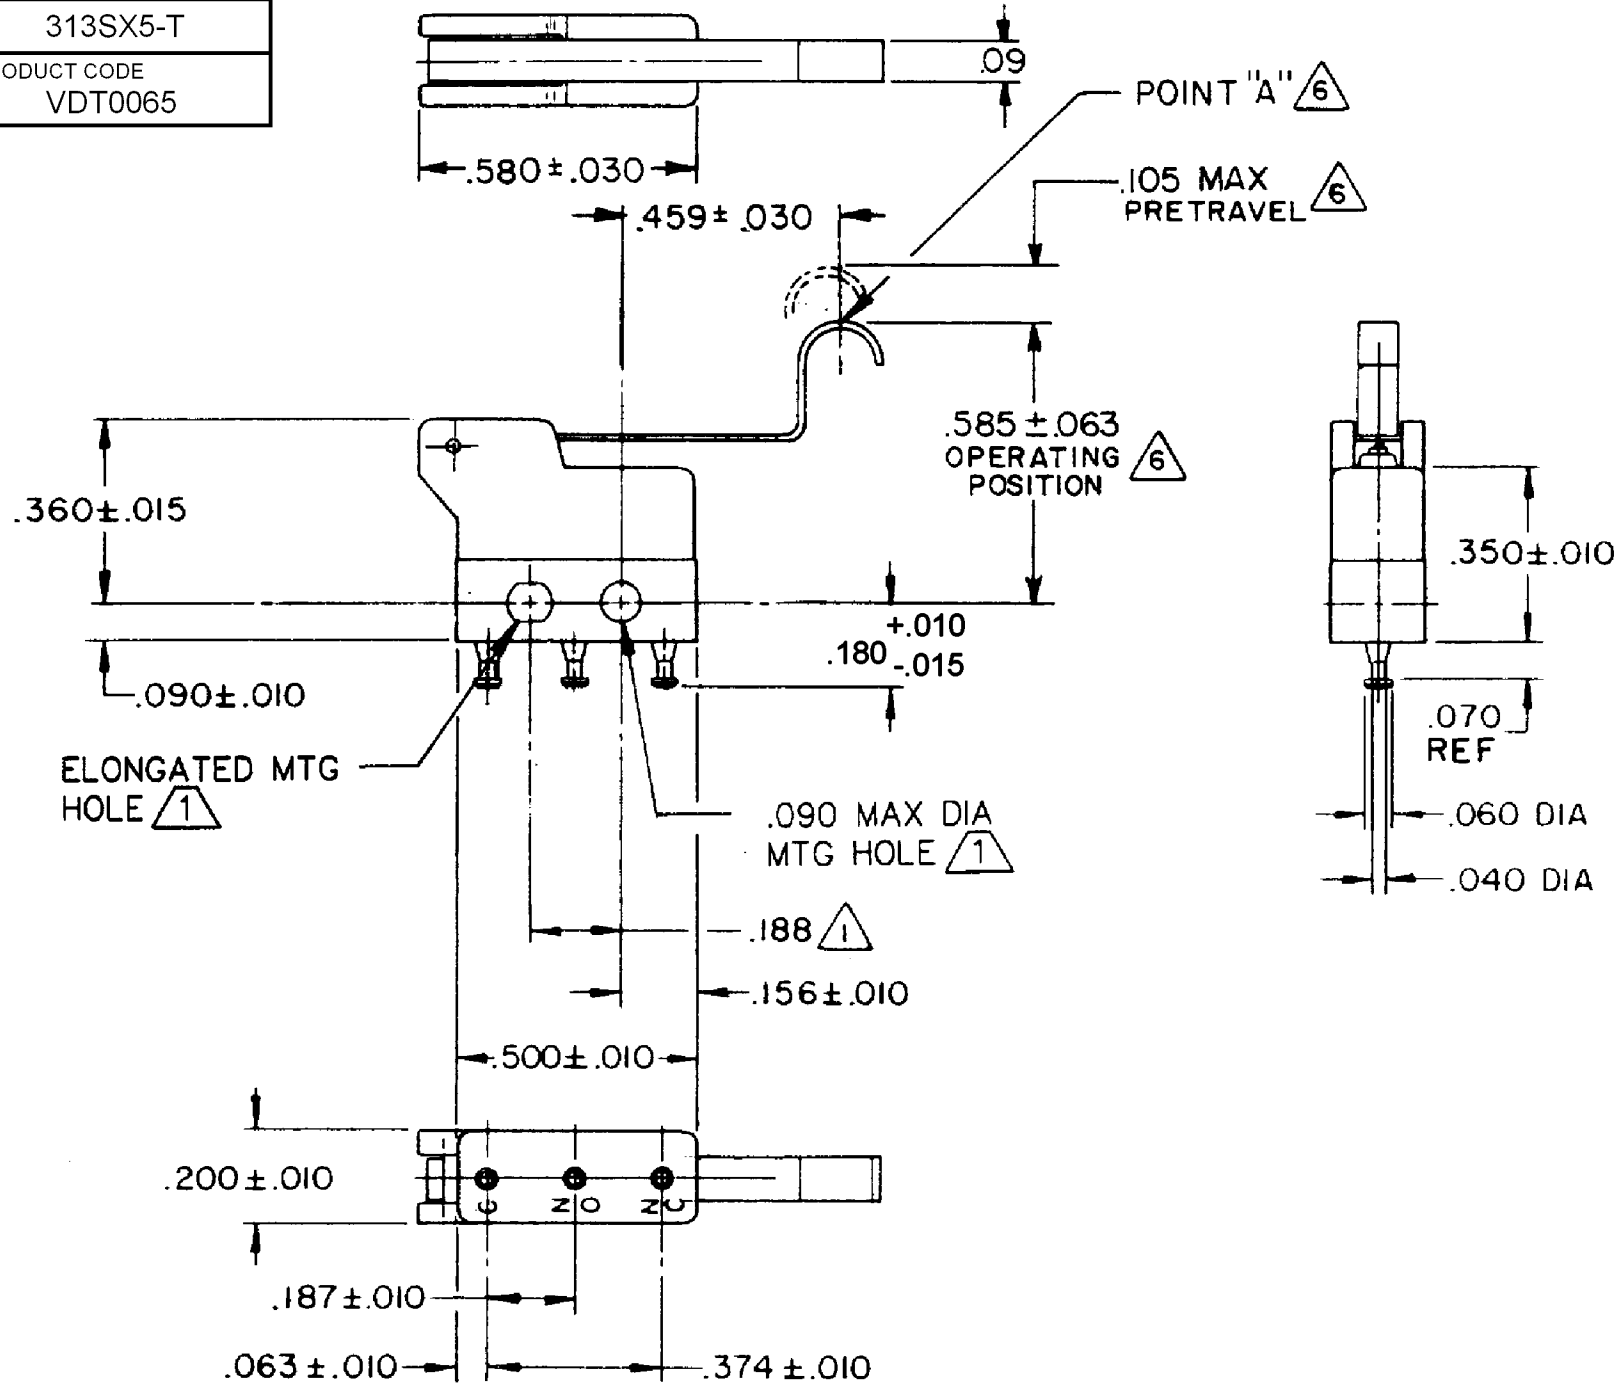

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $.087$ MAX DIA ON $.188 \pm .002$ CENTERS
- 2 - TERMINALS ARE SOLDER DIPPED WITH RoHS-COMPLIANT TIN/COPPER/SILVER SOLDER.
- 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F
- 4 - MOVABLE CONTACT MATERIAL-24 K SOLID GOLD OVERLAY
- 5 - STATIONARY CONTACT MATERIAL-GOLD ALLOY
- 6 - CHARACTERISTICS ARE TAKEN AT POINT A

RELEASE NO.	PR-2877
REPLACES	

CHARACTERISTICS $\triangle 6$
OPERATING FORCE----- 30 GRAMS MAX
RELEASE FORCE----- 5 GRAMS MIN
DIFFERENTIAL TRAVEL--- .035 MAX
OVERTRAVEL----- .022 MIN

ELECTRICAL DATA		
CONTACT ARRANGEMENT SPDT		
30 VOLTS DC RATING		
	SEA LEVEL	50,000 FT
INDUCTIVE	0.5 AMP	0.5 AMP
RESISTIVE	1 AMP	1 AMP
MAXIMUM INRUSH 2 AMP		
APPROVALS	KEMA, CE	1A 250 V ~ T125 25E3  
	UL, CSA	1A 125 VAC   L22J

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:
NO PLACE X $\pm$
ONE PLACE .X $\pm$
TWO PLACE .XX $\pm$
THREE PLACE .XXX $\pm$
FOUR PLACE .XXXX $\pm$
ANGLES $\pm$
THIRD ANGLE PROJECTION


DRAWN	SPK	27FEB08
CHECK	RJ	27FEB08
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell			
TITLE SWITCH - BASIC			
SIZE B	TYPE I	DRAWING NAME 313SX5-T	REV 11
SCALE -	WEIGHT:	SHEET 1 OF 1	