


										1
LOC	DIST			REVISIONS						
G	14	P	F	ZONE	LTR	DESCRIPTION			DATE	APPD
					C	REV & REDRAWN PER 0720-0061-93			4-19-93	1AP DAP

METRIC

DIMENSIONS LISTED IN mm [INCHES]

AMP WIRE RANGE	 E13288 Listed
12-10 AWG SOLID OR STRANDED	NOT APPLICABLE
 LR7189 Certified	MILITARY P/N AND CLASS
NOT APPLICABLE	NOT APPLICABLE

1 STAMP AMP 12-10* APPROX AS SHOWN

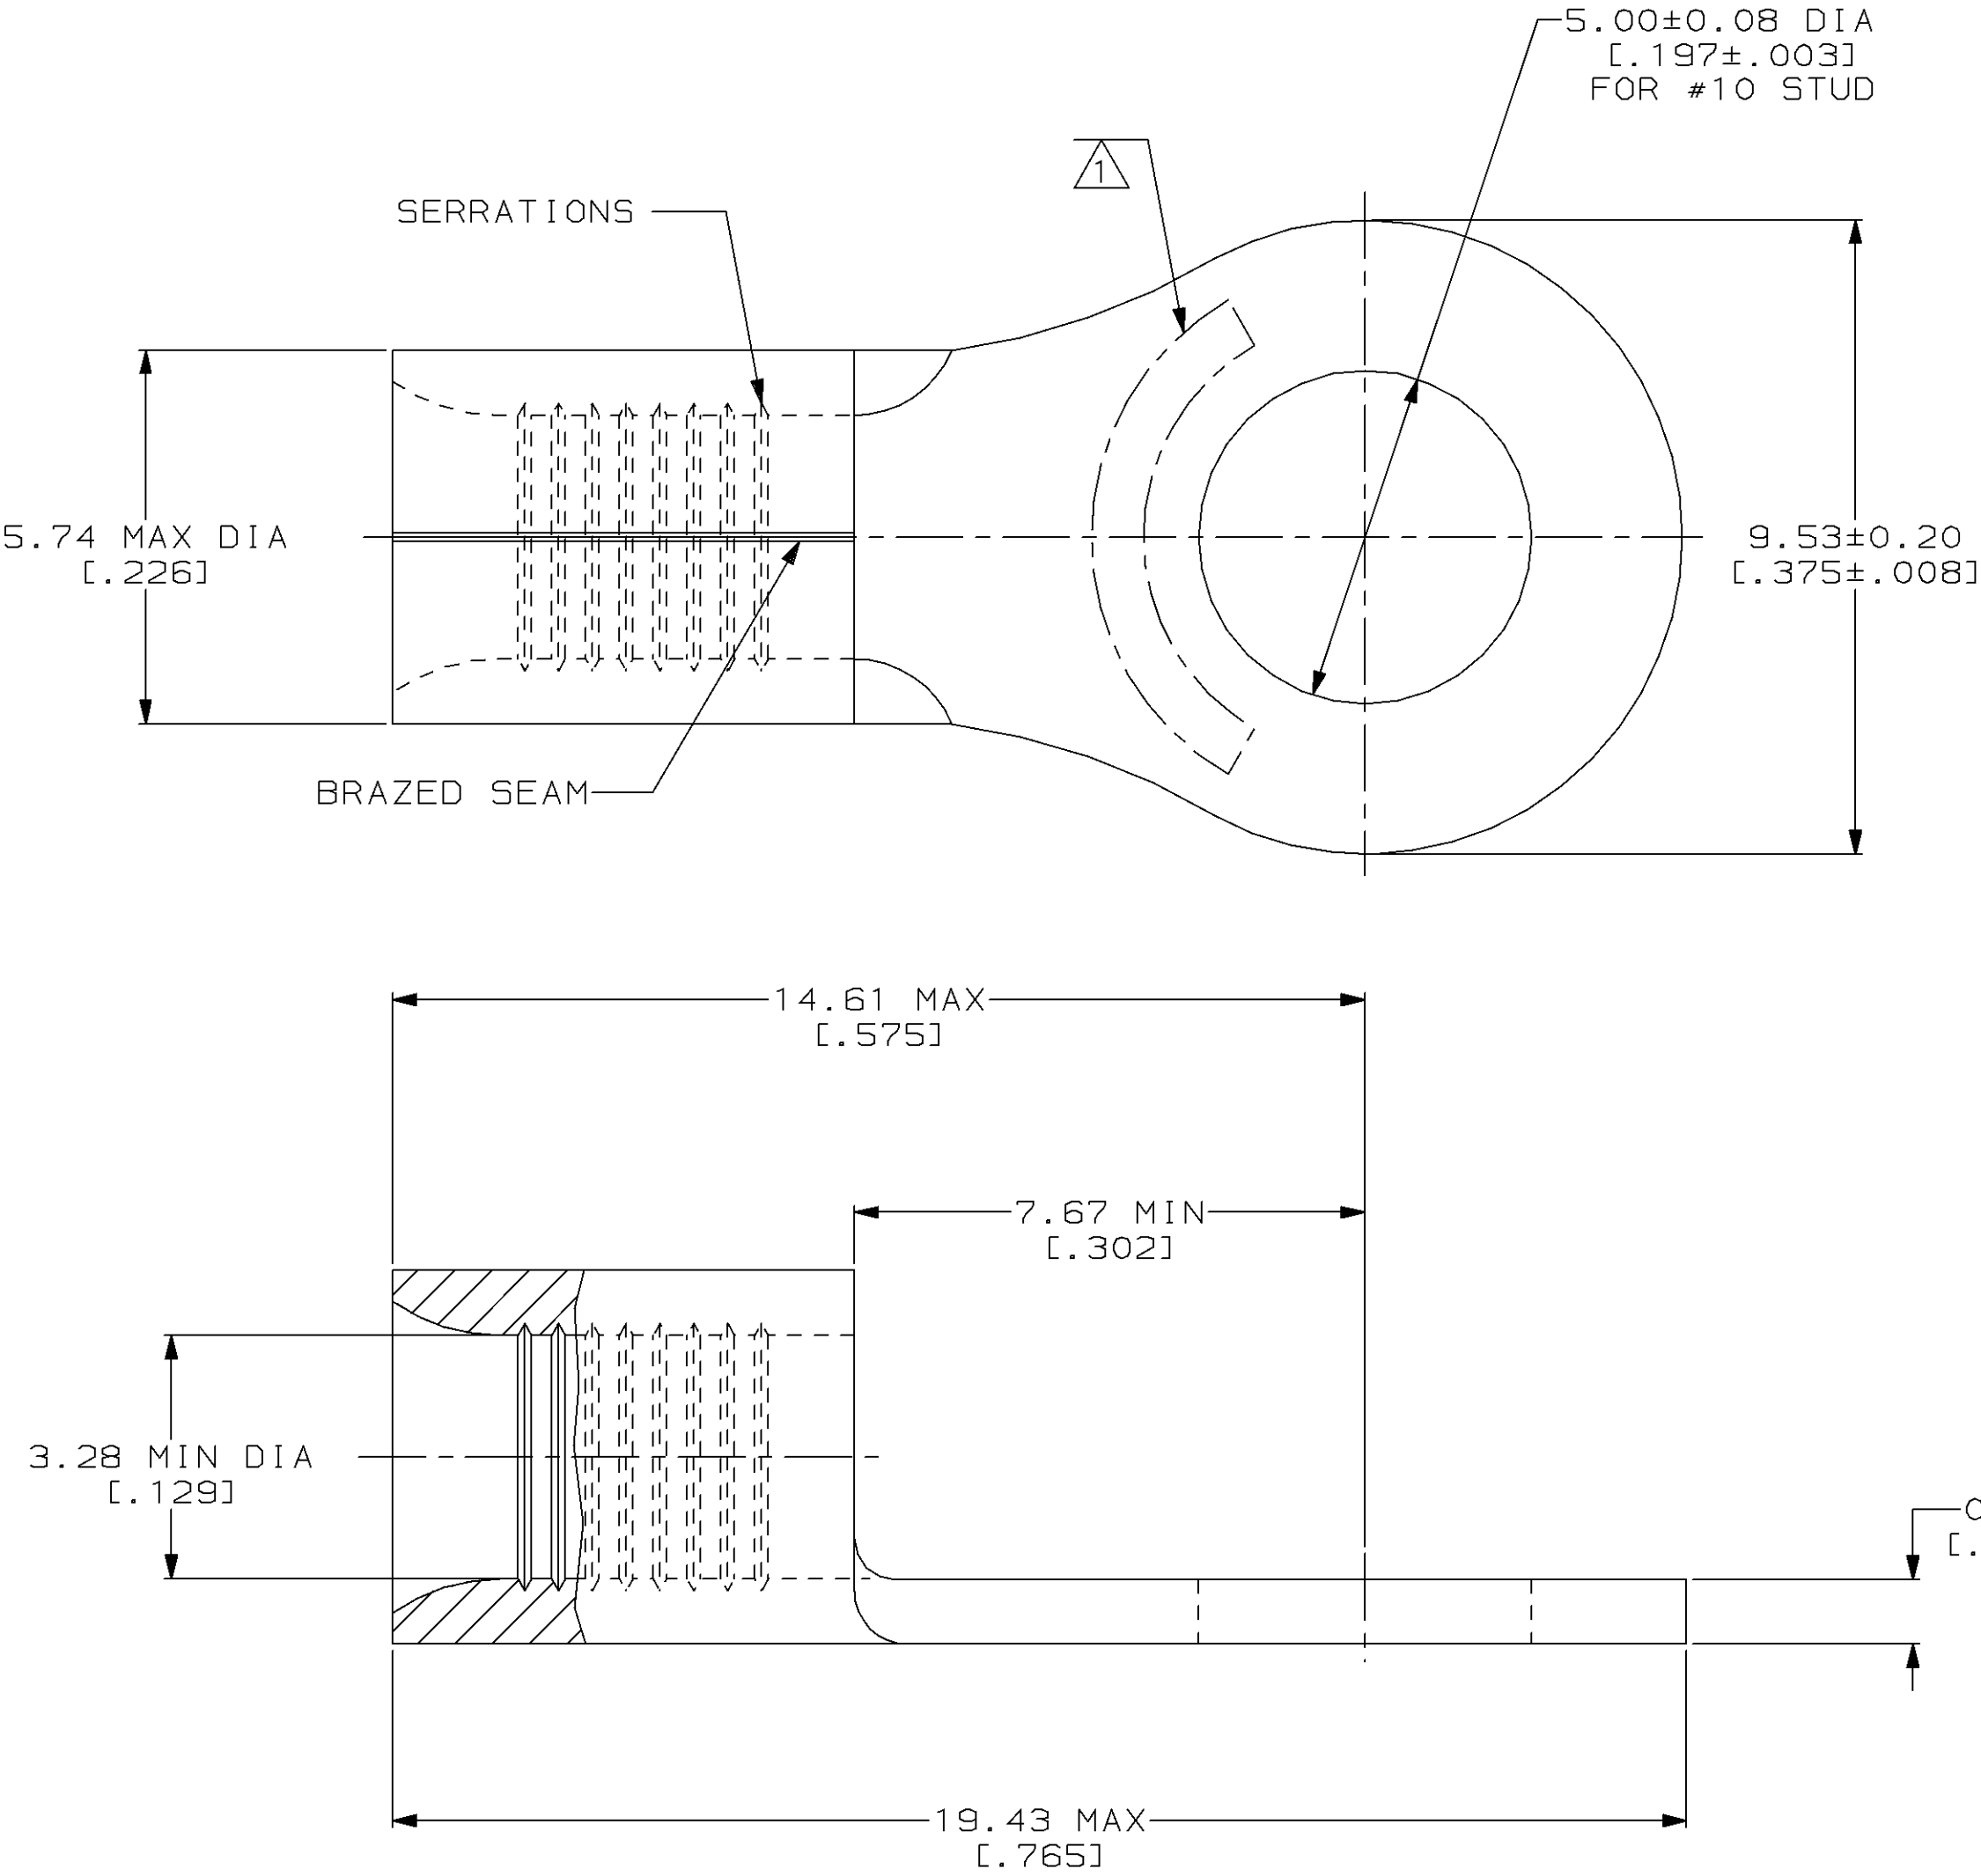

						2500	ON TAPE		2-323062-2				
						----	LOOSE PIECE		323062				
						QUANTITY	PACKAGING TYPE		PART NO				
AMP INCORPORATED CUSTOMER SERVICE SYSTEMS			MAX RECOMMENDED OPERATING TEMPERATURE: 343°C MAX		DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ± - 3 PLC DEC ± - ANGLES ± - MATERIAL COPPER PER ASTM B-152 ANNEALED		DR 4-19-93 TA BRINKMAN		AMP AMP Incorporated Harrisburg, PA 17105-3608 NAME TERMINAL, RING TONGUE, HEAT RESISTANT, STRATO-THERM™				
							CHK 4-19-93 DA PATTERSON						
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS		PRODUCT INFORMATION CENTER 1-800-522-6752		VOLTAGE RATING: NOT APPLICABLE		APPD 4-19-93 DE MILLER							
				WIRE CROSS SECTIONAL AREA RANGE: 2.62-6.64mm² [5,180-13,100] CIR MILS SOLID OR STRANDED		APPD 4-19-93 JL MECKLEY							
FOR APPLICATION TOOLING INFORMATION		TOOLING ASSISTANCE CENTER 1-800-722-1111		FINISH NICKEL PLATE 0.00762[.000300] MIN THK PER QQ-N-290		PRODUCT SPEC -		APPLICATION SPEC -		SIZE C	CAGE CODE 00779	DRAWING NO C-323062	
FOR ORDER ENTRY		1-800-526-5142		THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		WEIGHT -		SCALE 10:1		SHEET		1 OF 1	