

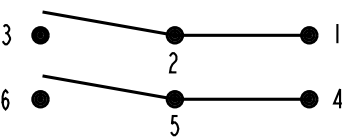
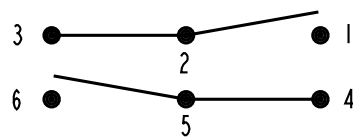
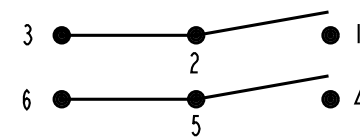
MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

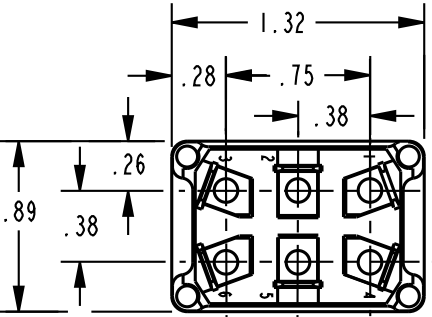
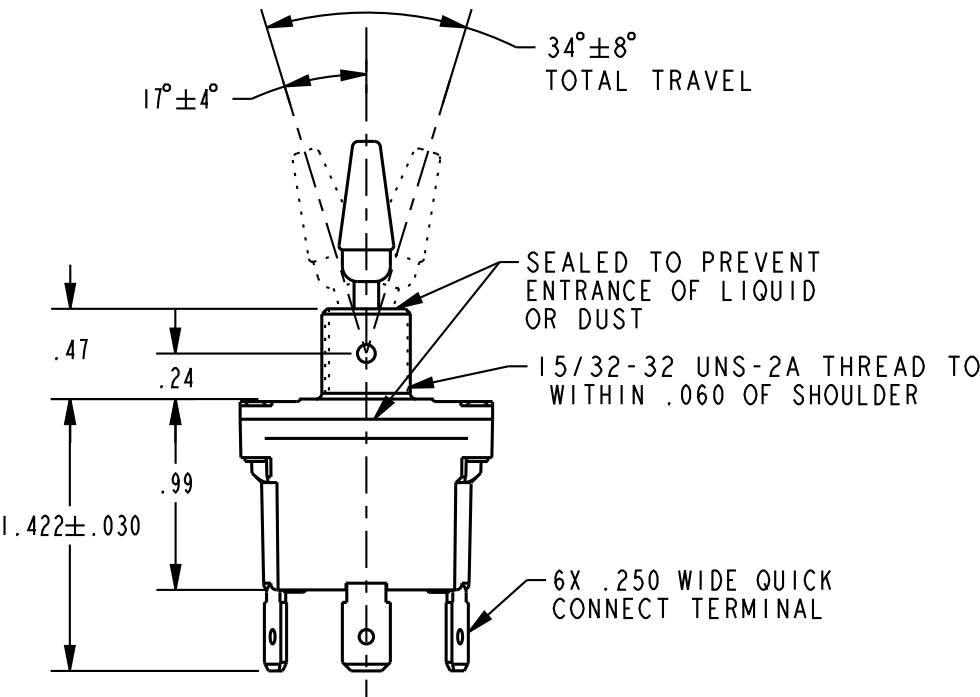
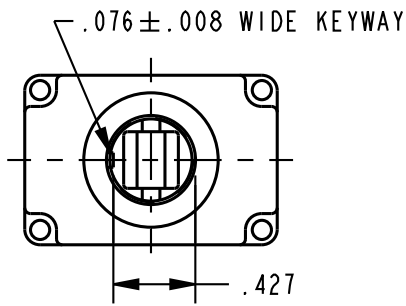
SWITCH - TOGGLE

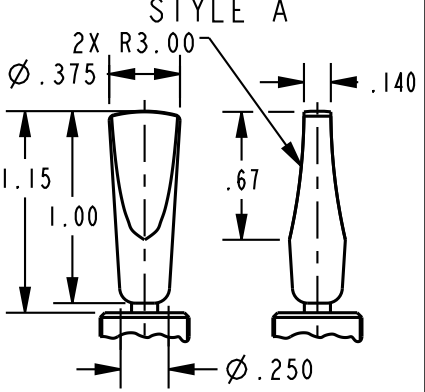
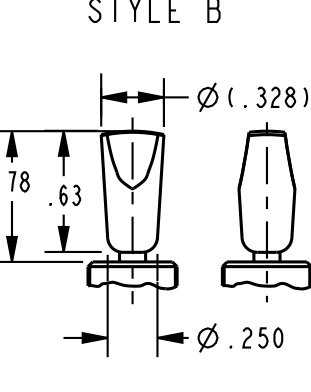
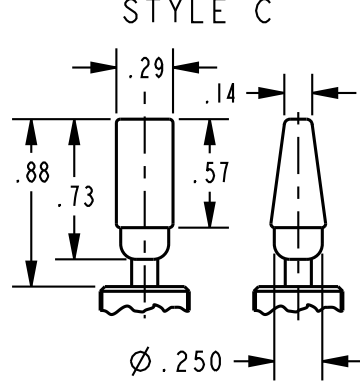
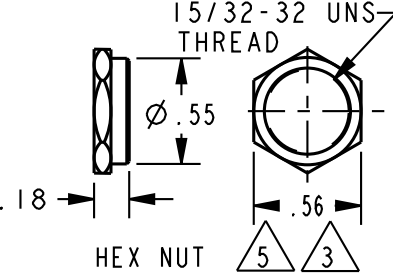


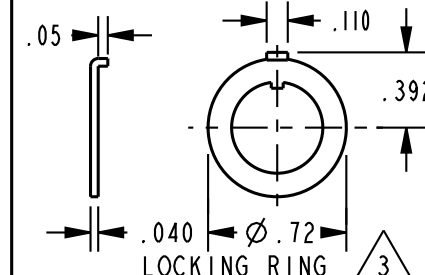
CATALOG LISTING
32NT391-12 SERIES CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CIRCUIT MADE WITH TOGGLE LEVER IN

KEYWAY SIDE	CENTER	OPPOSITE KEYWAY
		
MAINTAINED POSITION	MAINTAINED POSITION	MAINTAINED POSITION



LEVER COLOR CODE 		LEVER STYLE 			
COLOR IDENT	COLOR	STYLE A	STYLE B	STYLE C	
01	WHITE				
02	BLACK				
03	BLUE				
04	RED				
05	GREEN				
06	ORANGE				
07	GRAY				
08	YELLOW				
09	LT BLUE				
					

ELECTRICAL DATA


L191 15A 125, 250, 277 VAC
1/2HP 125 VAC
1HP 250, 277 VAC
5A 125 VAC "L"



NOTES

- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160° F CONTINUOUSLY AT FULL RATED LOAD
- 2 - MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
-  3 - FURNISHED UNASSEMBLED
-  4 - SUFFIX MUST BE ADDED FOR DESIRED LEVER STYLE AND COLOR (EXAMPLE: 32NT391-12-C08)
-  5 - BLACK FINISH

ANSI Y14.5M-1982 APPLIES

THIRD ANGLE PROJECTION	
	
SCALE	FULL
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE	(.0) ±.030
TWO PLACE	(.00) ±.015
THREE PLACE	(.000) ±.005
ANGLES	±
WEIGHT	