

REVISIONS
A CO-94361
DCS 23 NOV 99
B 207607
C S L 10 MAR 03

CHECK	17MAY96	TSM	CHECK	15MAY96	JJA
PTC/CAD	2D	DRAWN	JJA	15MAY96	JJA




MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH - TOGGLE

CATALOG LISTING
32NT392 SERIES CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CATALOG LISTING 5	CIRCUIT MADE WITH TOGGLE LEVER IN 4			ELECTRICAL DATA
	KEYWAY SIDE (1-2, 4-5)	CENTER (1-2, 4-5)	OPPOSITE KEYWAY (2-3, 5-6)	
32NT392-1	ON	OFF	ON	L191 15A 125, 250, 277 VAC 1/2HP 125 VAC 1HP 250, 277 VAC 5A 125 VAC "L" UL CE
32NT392-2	OFF	NONE	ON	
32NT392-3	ON	NONE	ON	
32NT392-21	NONE	OFF	ON	
32NT392-31	NONE	ON	ON	
32NT392-4	MOM OFF	NONE	ON	L192 10A 125, 250, 277 VAC 1/4HP 125 VAC 1/2HP 250, 277 VAC 3A 125 VAC "L" UL CE
32NT392-5	MOM ON	OFF	ON	
32NT392-6	MOM ON	NONE	OFF	
32NT392-7	MOM ON	OFF	MOM ON	
32NT392-8	MON ON	NONE	ON	
32NT392-51	NONE	ON	MOM ON	
32NT392-61	MOM ON	OFF	NONE	

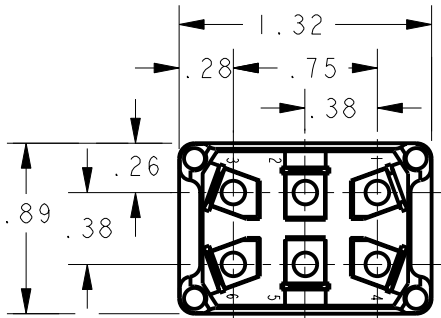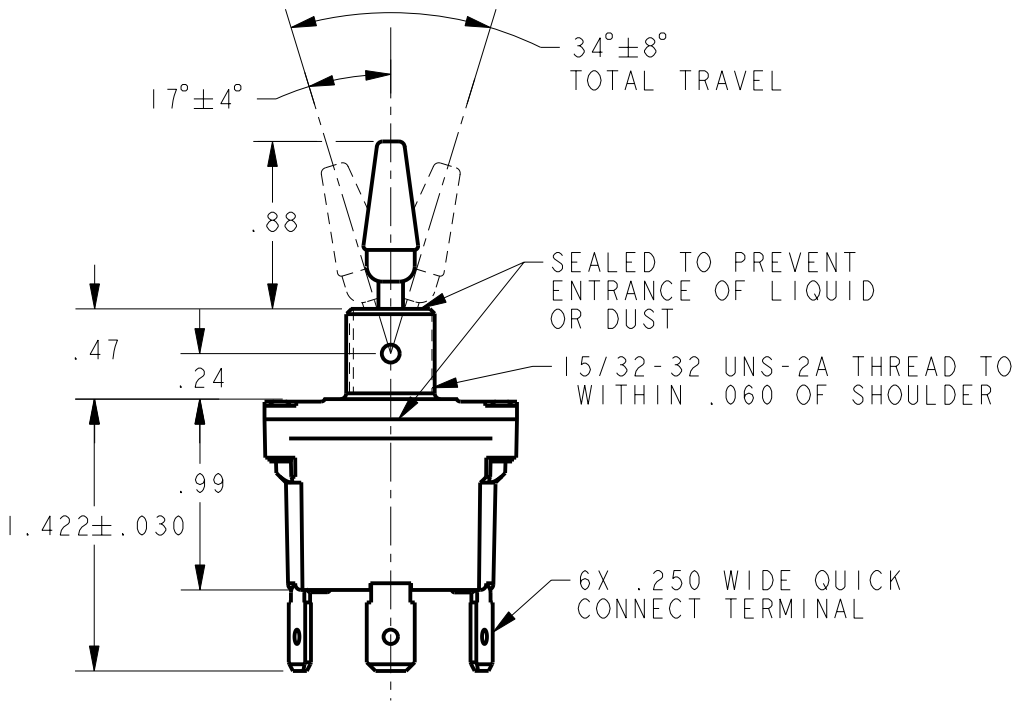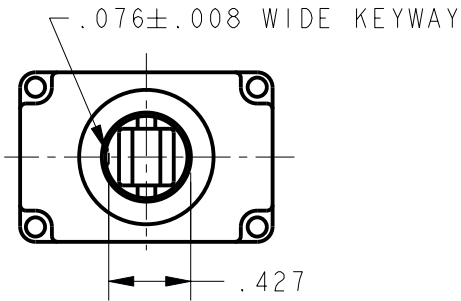

LEVER COLOR CODE 5	LEVER STYLE 5		
COLOR IDENT	COLOR	STYLE A	STYLE B
01	WHITE		
02	BLACK		
03	BLUE		
04	RED		
05	GREEN		
06	ORANGE		
07	GRAY		
08	YELLOW		
		STYLE C	

NOTES

- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160° F CONTINUOUSLY AT FULL RATED LOAD
- 2 - MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
- 3 - FURNISHED UNASSEMBLED
- 4 - APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS
- 5 - SUFFIX MUST BE ADDED FOR DESIRED LEVER STYLE AND COLOR (EXAMPLE: 32NT392-7-C08)

THIRD ANGLE PROJECTION	
SCALE	FULL
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE	(.0) ±.030
TWO PLACE	(.00) ±.015
THREE PLACE	(.000) ±.005
ANGLES	±
WEIGHT	