

CATALOG LISTING
32NT91-70 SERIES CHART 1

CATALOG LISTING
PAGE 1 OF 1

REPLACES
RELEASE NO. PR-21196

CHECK

REVISIONS

DCS
24 NOV 99

CHECK

20 JUL 94

CHECK

DAW

14 JUL 94

CHECK

TSM


PTC/CAD 2D

DRAWN

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CATALOG LISTING	AVAILABLE LOCKING COMBINATIONS FOR CONFIGURATION SEE LETTERED DETAILS	STYLE NUMBER	ELECTRICAL RATING	
			L192 10A 125, 250, 277 VAC 1/4HP 125 VAC 1/2HP 250, 277 VAC 3A 125 VAC "L"	
32NT91-70	NONE	1		
32NT91-70/5	E,L,N	2		

"A" 4 LOCKED IN THREE POSITIONS	"B" 4 LOCKED IN CENTER AND EXTREME POS. (KEYWAY SIDE)	"D" 4 LOCKED OUT OF CENTER POSITION	"E" 4 LOCKED IN CENTER POSITION	"F" 4 LOCKED IN EXTREME POS. (OPP. KEYWAY)	"G" 4 LOCKED IN EXTREME POS. (KEYWAY SIDE)
"H" 4 LOCKED OUT OF CENTER AND EXTREME POS. (KEYWAY SIDE)	"J" 4 LOCKED OUT OF CENTER AND EXTREME POS. (OPP. KEYWAY)	"K" 4 LOCKED IN CENTER AND EXTREME POS. (OPP. KEYWAY)	"L" 4 LOCKED OUT OF EXTREME POS. (KEYWAY SIDE)	"M" 4 LOCKED OUT OF AND INTO EXTREME POS. (OPP. KEYWAY)	"N" 4 LOCKED OUT OF EXTREME POS. (OPP. KEYWAY)
"P" 4 LOCKED OUT OF AND INTO EXTREME POS. (KEYWAY SIDE)	CIRCUIT MADE WITH TOGGLE LEVER IN				
KEYWAY SIDE		CENTER		OPPOSITE KEYWAY	
MOMENTARY POSITION		MAINTAINED POSITION		MOMENTARY POSITION	
LOCKING RING 3		LOCKWASHER 3		2X HEX NUT 3	

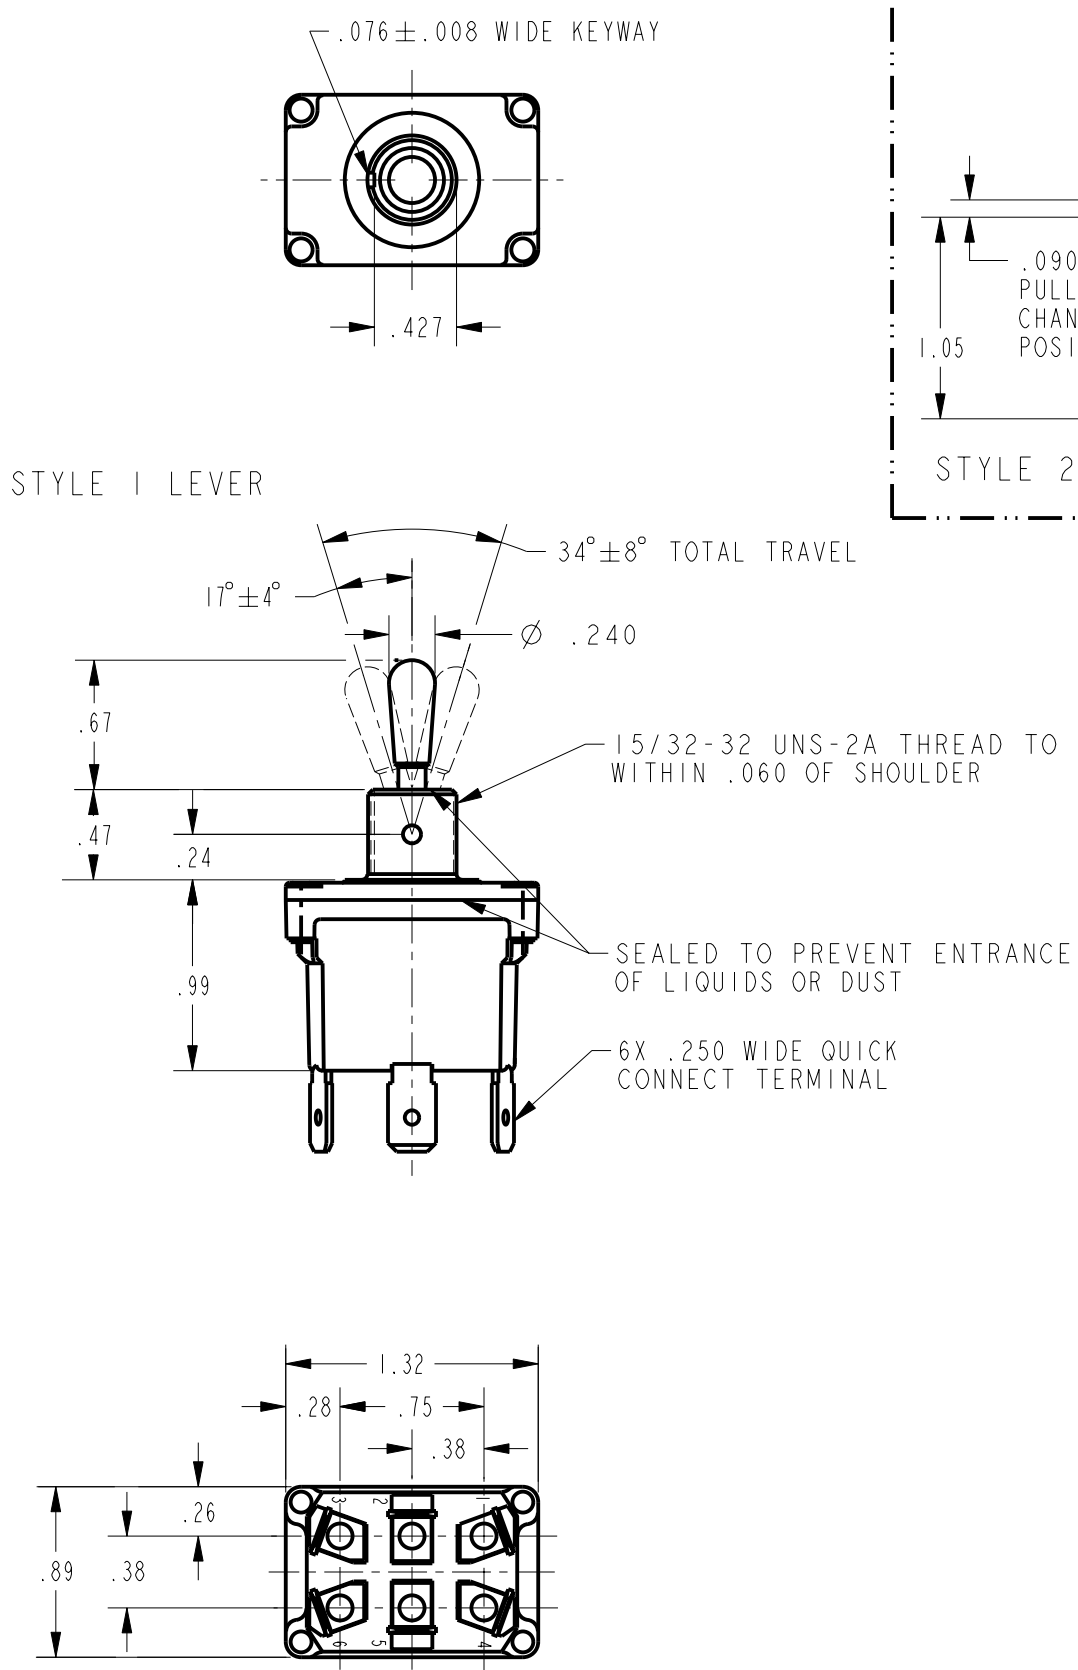

- NOTES
- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
 - 2 - MICRO SWITCH CAT. LIST. MARKED ON SIDE OF SWITCH
 - 3 - FURNISHED UNASSEMBLED
 - 4 - KEYWAY SHOWN ON LEFT SIDE
 - 5 - SUFFIX LETTER MUST BE ADDED FOR DESIRED TYPE OF TOGGLE LOCKING. SEE CHART FOR AVAILABLE LOCKING COMBINATIONS

THIRD ANGLE PROJECTION	
SCALE	FULL
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE	(.0) ±.030
TWO PLACE	(.00) ±.015
THREE PLACE	(.000) ±.005
ANGLES	±
WEIGHT	.12 LBS APPROX